



IKUSI

MULTIMEDIA CATALOGUE


Index



| | <i>page</i> |
|---|------------------|
| RECEPTION | 2-7 |
| TERRESTRIAL . SATELLITE . LNB . ACCESSORIES | |
| AMPLIFICATION | 8-35 |
| MAST . BROADBAND . PROGRAMMABLE . SINGLE-CHANNEL . APARTMENT . EXTENSION | |
| HEADENDS: ClassA (MTI, MHD, TPC ...HTL) . HTI | 36-56 |
| TRANSMODULATOR . TRANSCODER . ENCODER . CHANNEL PROCESSOR . CHANNEL CONVERTER . REGENERATOR . MULTIPLEXOR . AMPLIFICATOR . POWER SUPPLY . ACCESSORIES | |
| Ikusi Flow | 64-67 |
| UNIVERSAL INPUT . OUTPUT . SECURITY . ENCODER . CONTROL . POWER SUPPLY . SET-TOP-BOX . DEVICE MANAGER | |
| MODULATORS | 68-75 |
| DIGITAL . ANALOG | |
| MULTISWITCHES | 76-83 |
| STAND-ALONE . CASCADABLE . AMPLIFIER . SPLITTER . ACCESSORIES | |
| DISTRIBUTION AND FILTERED | 84-91 |
| TAP-OFF . SPLITTER . LTE BAND-STOP FILTERS . WALL OUTLETS . CABLES . CONNECTORS . ACCESSORIES | |
| OPTICAL FIBRE | 92-106 |
| TRANSMITER . RECEIVER . SPLITTER . ATTENUATOR . OPTICAL LNB . ACCESSORIES | |
| RACK 19" SET-TOP-BOX TECHNICAL ANNEX | 107 108 |
| RACK CABINET AND FRAME DVB-T/T2 SET-TOP-BOX THE CHANNEL ALLOCATION REDUCTION TABLE | |




Antennas adapted to the new TV spectrum, rejecting LTE bands interferences

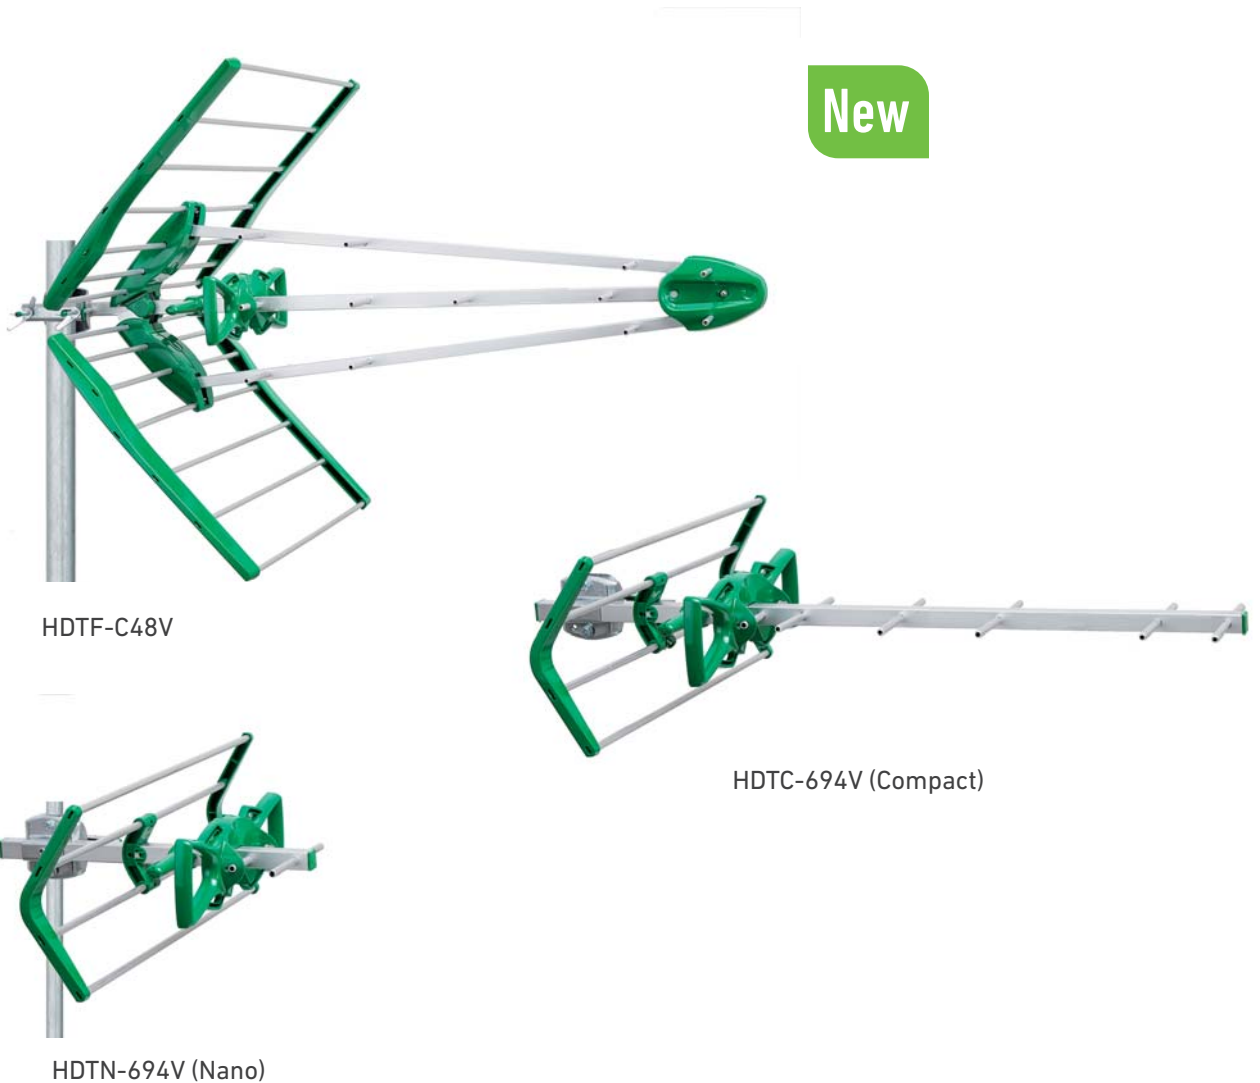

- FLASHD series fully assembled
- Instant opening with the touch of a button
- COMPACT and NANO series, minimum packaging volume for transport
- Adapted models 1st and 2nd Digital Dividend
- High gain. Stable reception


Complete solution for receiving terrestrial TV signals

FLASHD LTE gain diagrams

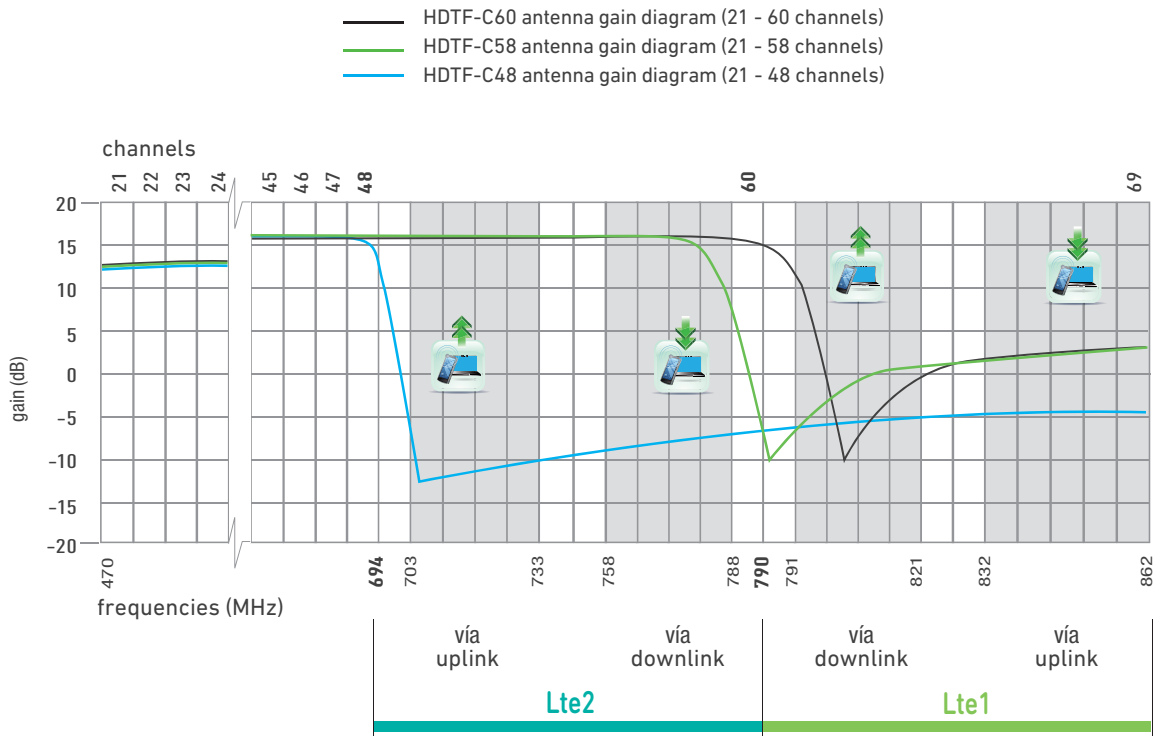


Installation example



1st Digital Dividend

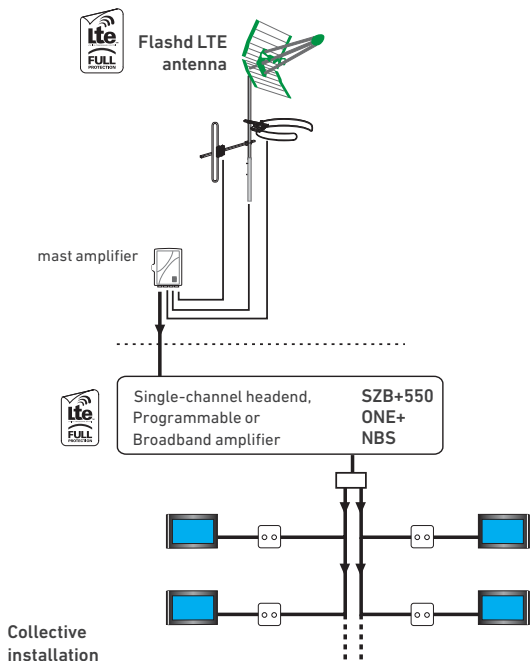

2nd Digital Dividend

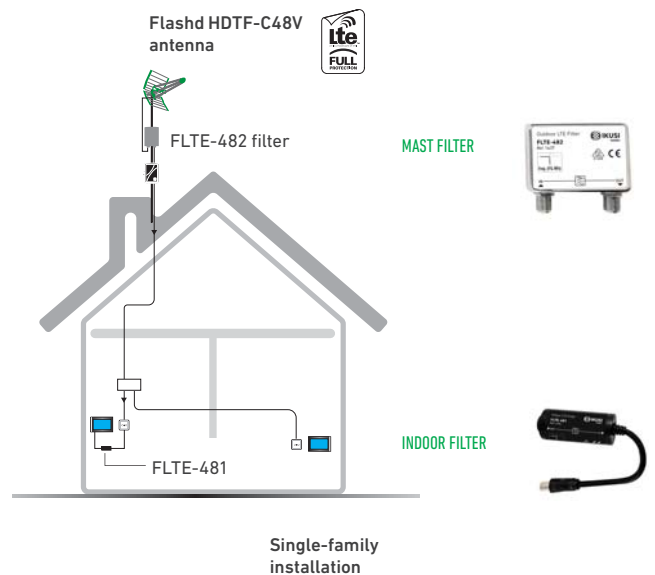

Antennas FLASHD HDTF Series

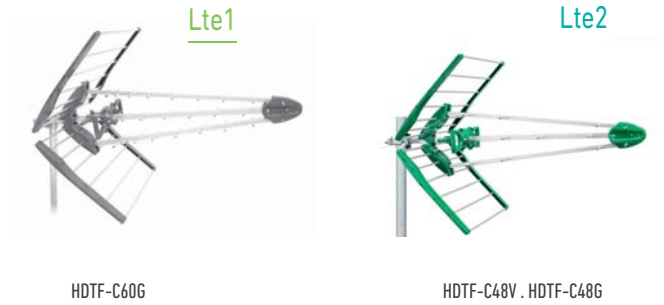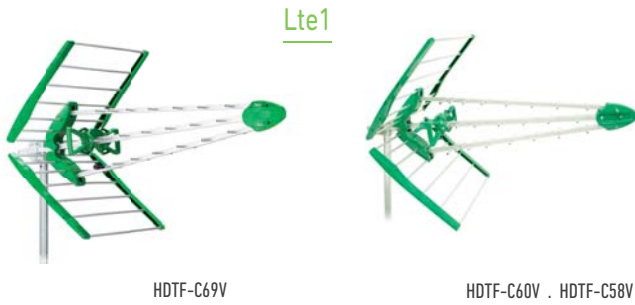

- Adapted models to the 1st and 2nd Digital Dividend.
- The key feature of the new Flashd LTE antennas is that they provide a strong rejection of LTE while maintaining current gains, very often without the need to incorporate a filter.
- Designed to help avoid the saturation of active equipment by LTE signals, rejecting higher frequencies 694 MHz or 790 MHz depending on model.
- Supplied fully assembled.
- Unfold with a simple press of a button.



- Passive compact dipole. Dihedral reflector, all aluminium parts.
- Fixed to masts of 25 to 50 mm. Adjustable tilt angle $\pm 40^\circ$.
- ABS enclosure with IP55 protection rating. Easy disassembly for fast coaxial cable connection.

FLASHD Series


| MODEL | HDTF-C69V | |
|---------------------|--------------------------|----------------------------------|
| REF. | 1817 | |
| Channels | 21 - 69 (470-862 MHz) | |
| Nominal gain | dB | 17.5 |
| Front-to-back ratio | dB | ≥ 20 |
| Beamwidth | H / V | $40^\circ / 50^\circ$ (470 MHz) |
| Windload | N | 130 Km/h : 105 150 Km/h : 150 |
| Length | cm | 105 |
| Quantity boxed | 1 | |
| Colour | Green | |

FLASHD Series

| MODEL | HDTF-C60V | HDTF-C60G | HDTF-C58V | HDTF-C48V | HDTF-C48G |
|---------------------|--------------------------|----------------------------------|--------------------------|--------------------------|-----------|
| REF. | 1821 | 1820 | 1819 | 1818 | 1816 |
| Channels | 21 - 60 (470-790 MHz) | | 21 - 58 (470-774 MHz) | 21 - 48 (470-694 MHz) | |
| Nominal gain | dB | 17 | | | |
| Front-to-back ratio | dB | ≥ 20 | | | |
| Beamwidth | H / V | $40^\circ / 50^\circ$ (470 MHz) | | | |
| Windload | N | 130 Km/h : 105 150 Km/h : 150 | | | |
| Length | cm | 105 | | | |
| Quantity boxed | 1 | | | | |
| Colour | Green | Gray | Green | Green | Gray |

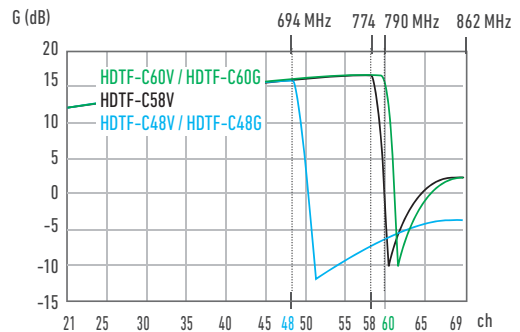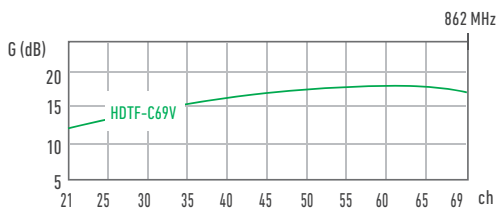

Flashd Series antennas
Unfolded by simply pressing a button!

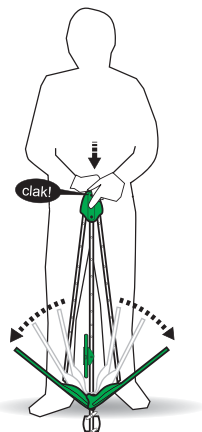

Antennas COMPACT and NANO Series

Lte1

New Lte2

Lte1

New Lte2



HDTc-790V



HDTc-694V



HDTn-790V



HDTn-694V

- The smallest antenna for reception of TV signals in the UHF band, formed by a dihedral reflector made up of four aluminium tubes and a dipole.
- For vertical and horizontal polarization, allowing variation of elevation angle.
- Minimum packaging volume for transport and easy assembly without tools.
- Versatility in the pallet from 30cm to the desired height, in increments of 10cm
- Cable connection: F type connector. 1 screw-on plug and 1 rubber protection cap are supplied.
- Clamping system for masts \varnothing 25 to 50 mm

COMPACT Series

| MODEL | | HDT513V | HDTc-790V | HDTc-694V |
|---------------------|-------|--------------------------------|--------------------------|--------------------------|
| REF. | | 1803 | 1811 | 1824 |
| Channels | | 21 - 69 (470-862 MHz) | 21 - 60 (470-790 MHz) | 21 - 48 (470-694 MHz) |
| Nominal gain | dB | 13 | | 14 |
| Front-to-back ratio | dB | ≥ 16 | | |
| Beamwidth | H / V | 60° / 80° | | |
| Windload | N | 130 Km/h : 18 150 Km/h : 23 | | |
| Length | cm | 80 | | |
| Quantity boxed | | 10 | | |
| Colour | | Green | | |

NANO Series

| MODEL | | HDT511V | HDTn-790V | HDTn-694V |
|---------------------|-------|--------------------------------|--------------------------|--------------------------|
| REF. | | 1800 | 1813 | 1825 |
| Channels | | 21 - 69 (470-862 MHz) | 21 - 60 (470-790 MHz) | 21 - 48 (470-694 MHz) |
| Nominal gain | dB | 12 | | |
| Front-to-back ratio | dB | ≥ 16 | | |
| Beamwidth | H / V | 60° / 80° | | |
| Windload | N | 130 Km/h : 15 150 Km/h : 20 | | |
| Length | cm | 50 | | |
| Quantity boxed | | 5 | | |
| Colour | | Green | | |

Antennas designed for installation in ...



In the bungalow



In the shop




In the mobile home




In the cottage

Gain diagrams

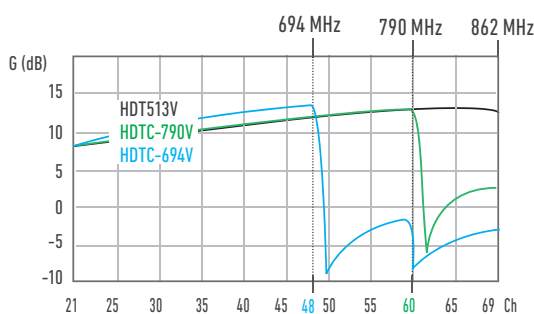

Gain diagrams

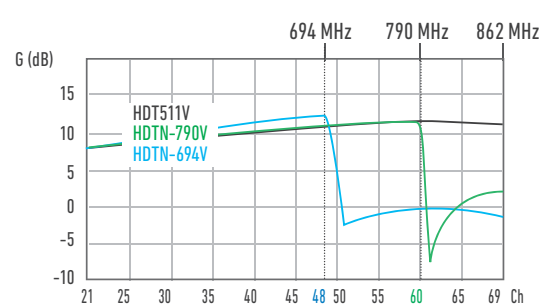

FM radio antennas



IKS-1E/FM



DAB-031

| MODEL | IKS-1E/FM | | DAB-031 | |
|--|-----------|----------|-----------|--|
| REF. | 1725 | | 1728 | |
| Frequency range | MHz | 88 - 108 | 174 - 240 | |
| Gain | dB | 1 | 2 | |
| Front-to-back ratio | dB | 0 | 0 | |
| Windload (for velocities 130/150 km/h) | N | 28/38 | 15/20 | |
| Quantity boxed | 5 | | 5 | |

- IKS-1E/FM antenna is circular type. Omnidirectional terrestrial reception FM (band II).
- DAB Yagi antenna type is for receiving digital radio signals.

Masts and supports



KMV-100



GME-200



BMA-200



GMA-400



BBT-100






BAP-200



SPA-240

| MODEL | REF. | DESCRIPTION |
|---------|------|---|
| KMV-100 | 1888 | Wind set. Steelwire 25m, rigging screw, wirelock, for Ø 30-35 mm masts |
| GME-200 | 1886 | Wall support bracket for Ø ≤45 mm masts |
| BMA-200 | 1887 | Single angle pipe with 4 screws plate and polythene cap |
| GMA-400 | 1911 | Wall-screwing clamp, length 40 cm for Ø ≤45 mm masts |
| BBT-100 | 1913 | Titable ridge-tale base for Ø30 to 35 mm masts |
| BAP-200 | 1949 | Hooked-support for SCF-085. Plate 200x200x2 mm and four M12 treaded hooks |
| SPA-240 | 3071 | Wall-fixing "U" type. Wind of the arm: 24 cm. Pipe of Ø40 mm made of galvanized steel |

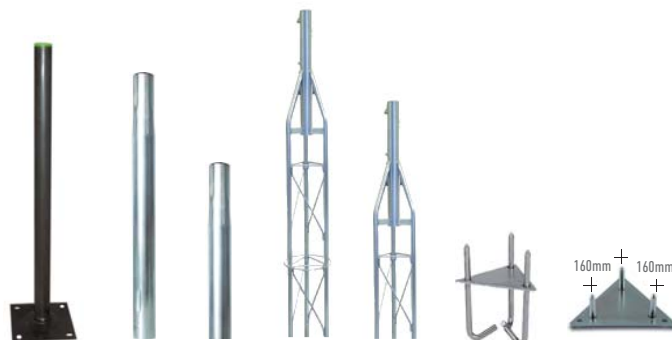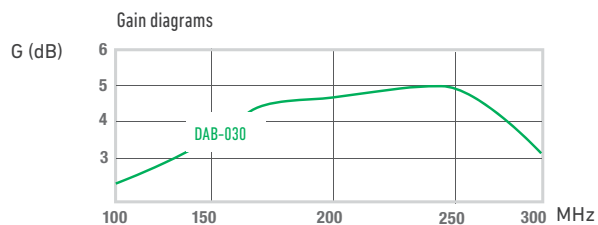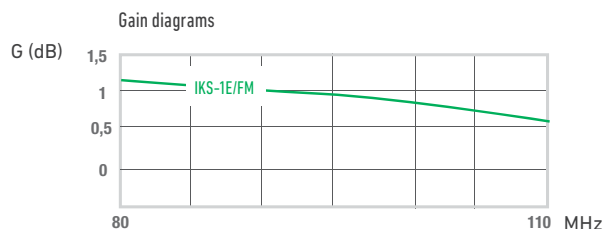

| MODEL | REF. | DESCRIPTION |
|---------|------|---|
| SCF-085 | 1067 | Ground-fixing "column" type. Heigh 90cm. Pipe of Ø50mm. Base 200x200 mm |
| MAS-300 | 1941 | Plug-in mast 3m length x 40mm Ø. Thickness 2 mm |
| MAS-250 | 1880 | Plug-in mast 2.5m length x 35mm Ø. Thickness 1,5 mm |
| TOR-250 | 1942 | Trestle-power 2.5m. Top end adapted for housing the point mast |
| TOR-150 | 1944 | Trestle-power 1.5m. Top end adapted for housing the point mast |
| BTA-225 | 1950 | Screwed, triangular fixed base side 225mm. Three bolts for securing |
| BFT-100 | 1876 | Hooked, triangular fixed base side 225mm. Three bolts for securing |

Satellite offset dishes. RPA Series



| MODEL | | RPA-060 | RPA-080 | RPA-100 | RPA-120 |
|---------------------|-----|------------------|------------------|------------------|------------------|
| REF. | | 3065 | 3067 | 3069 | 3060 |
| Diameter | mm | 632 x 583 | 779 x 845 | 1032 x 952 | 1245 x 1348 |
| Frequency range | GHz | 10.5 - 13 | 10.5 - 13 | 10.5 - 13 | 10.5 - 13 |
| Gain 12,75 GHz | dB | 36.4 | 38.5 | 40.3 | 42.4 |
| Disk coating | | Grey polyester | Grey polyester | Grey polyester | Grey polyester |
| Mast clamp diameter | mm | 25 / 50 | 30 / 60 | 35 / 60 | 40 / 60 |
| Elevation angle | ° | 0 - 90 | 0 - 58 | 0 - 90 | 0 - 90 |
| Structure material | | Galvanized steel | Galvanized steel | Galvanized steel | Galvanized steel |
| Total weight (ud) | kg | 2.40 | 4.91 | 8.40 | 13.30 |

LNBS. UEU Series



| MODEL | | UEU-121K | UEU-221K | UEU-421K | UEU-124K |
|--|--------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| REF. | | 1113 | 3083 | 1112 | 1114 |
| Type | | UNIVERSAL | TWIN | QUAD | QUATTRO |
| Input frequency | GHz | 10.70 - 12.75 | | | |
| Local oscillator | GHz | Low band 9.75 .. High band 10.60 | | | |
| Local Oscillator Temperature Drift (@ -40 ~ 60 °C) | MHz | ± 3 | | | |
| Output frequency | MHz | 950 - 2150 | | | |
| Phase noise at 10 kHz | dBc/Hz | -80 | | | |
| Gain | dB | 60 (±2) | | | |
| Noise figure typ | dB | 0,2 | 0,2 | 0,2 | 0,2 |
| IF output | | 1 (VL or VH or HL or HH) | 2 (VL or VH or HL or HH) | 4 (VL or VH or HL or HH) | 4 (VL) (VH) (HL) (HH) |
| Control tone | | low band 0 Hz high band 22 kHz | low band 0 Hz high band 22 kHz | low band 0 Hz high band 22 kHz | low band 0 Hz high band 22 kHz |
| Consumption | mA | 100 | 190 | 210 | 190 |
| Relative humidity | % | 0 - 95 | 0 - 95 | 0 - 95 | 0 - 95 |
| Power supply | VDC | vert.: 11 - 14 hor.: 16 - 20 | vert.: 11 - 14 hor.: 16 - 20 | vert.: 11 - 14 hor.: 16 - 20 | vert.: 11 - 14 hor.: 16 - 20 |



Mast amplifiers and power supplies



- Very high UHF gain
- Individual installations
- Optimum design for very low operative noise figure
- Adapted to the first and second digital dividend
- Interstage variable attenuators

☐ Solution for amplifying the TV signal, providing protection against LTE interferences.

Application example

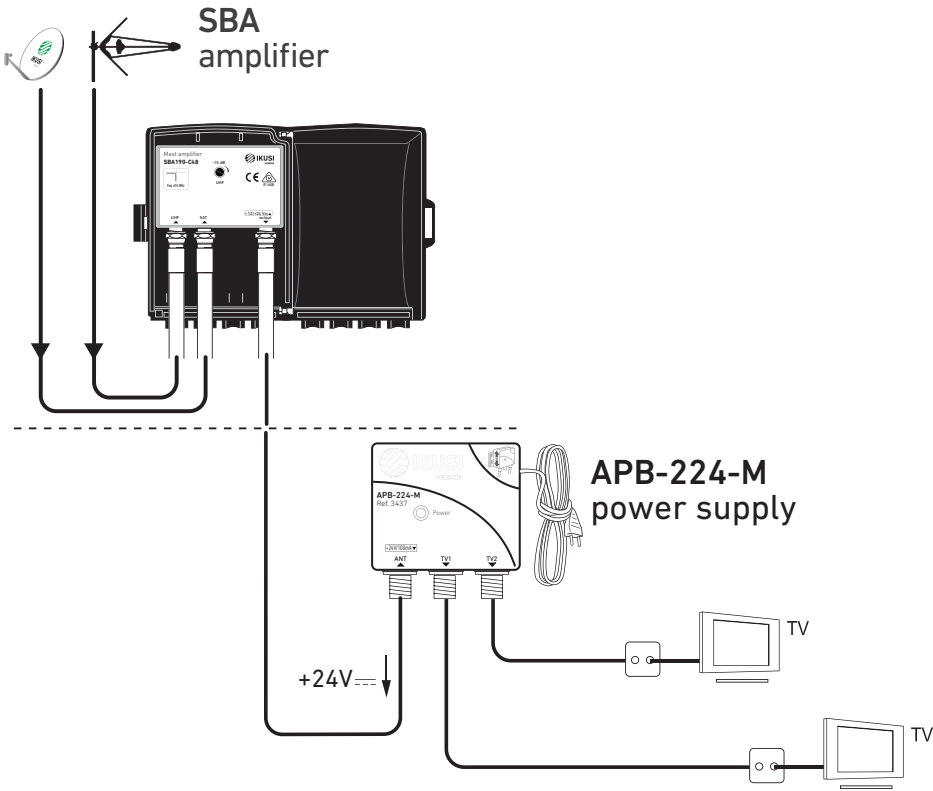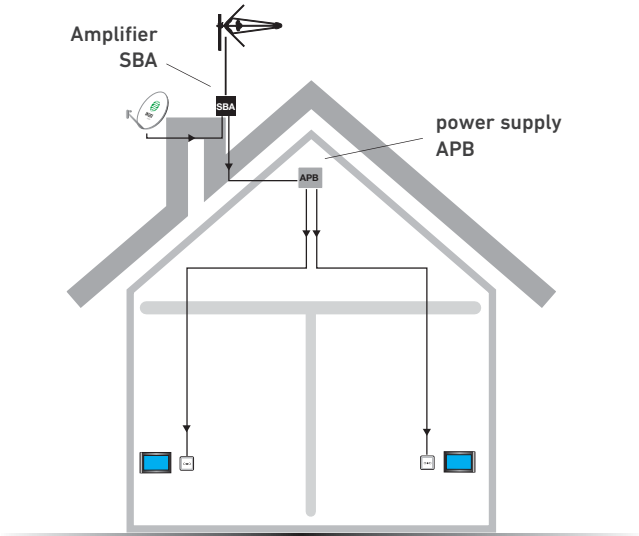

Shielded multiband mast amplifiers. SBA Series



LTE1

LTE2



- Adapted to the first and second digital dividend
- Very high UHF gain.
- Interstage variable attenuators.
- Optimum design for very low operative noise figure.
- Internal injection-moulded zinc alloy housing with F type ports.

1 UHF input

| MODEL | REF. | SBA100 series | |
|-----------------------------|------|---------------------|--------------------------------------|
| SBA100-C69 | 1225 | Frequency range MHz | 470 - 862 |
| SBA100-C60 | 1227 | | 470 - 790 (1 st dividend) |
| SBA100-C48 | 1228 | | 470 - 694 (2 nd dividend) |
| RF inputs | | | 1 UHF |
| Nominal gain | dB | | > 40 |
| Gain adjustment | dB | | 0 - 15 |
| Noise figure | dB | | ≤ 2 |
| Output level (DIN-8, -60dB) | dBμV | | 106 |
| Operation voltage | Voc | | +24 |
| Consumption | mA | | 55 |
| Dimensions | mm | | 96 x 125 x 46 |

2 UHF - UHF inputs

| MODEL | REF. | SBA101 Series | | |
|-----------------------------|------|---------------------|--------------------------------------|--|
| SBA101-C69 | 1294 | Frequency range MHz | 470 - 862 | |
| SBA101-C60 | 1295 | | 470 - 790 (1 st dividend) | |
| SBA101-C48 | 1296 | | 470 - 694 (2 nd dividend) | |
| RF inputs | | | 2 UHF UHF | |
| Nominal gain | dB | | >36 | |
| Gain adjustment | dB | | 0 - 15 | |
| Noise figure | dB | | < 5 | |
| Output level (DIN-8, -60dB) | dBμV | | 105 | |
| Input isolation | dB | | ≥26 | |
| Operation voltage | Voc | | +24 | |
| Consumption | mA | | 55 | |
| Dimensions | mm | | 96 x 125 x 46 | |

2 UHF-BI/FM//DAB/BIII inputs

| MODEL | REF. | SBA102 Series | | |
|-----------------------------|------|---------------------|--|----------|
| SBA102-C69 | 1300 | Frequency range MHz | 470 - 862 | 47 - 240 |
| SBA102-C60 | 1301 | | 470 - 790 (1 st dividend) | |
| SBA102-C48 | 1302 | | 470 - 694 (2 nd dividend) | |
| RF inputs | | | 2 UHF BI/FM/DAB/BIII | |
| Nominal gain | dB | | 25 | -1 |
| Gain adjustment | dB | | 0 - 15 | - |
| Noise figure | dB | | ≤ 2 | 1 |
| Output level (DIN-8, -60dB) | dBμV | | 106 | |
| Input isolation | dB | | ≥26 | |
| Operation voltage | Voc | | +24 | |
| Consumption | mA | | 45 | |
| Dimensions | mm | | 96 x 125 x 46 | |

2 UHF-SAT inputs

| MODEL | REF. | SBA190 Series | | |
|-----------------------------|------|---------------------|--|------------|
| SBA190-C69 | 1306 | Frequency range MHz | 470 - 862 | 950 - 2400 |
| SBA190-C60 | 1307 | | 470 - 790 (1 st dividend) | |
| SBA190-C48 | 1308 | | 470 - 694 (2 nd dividend) | |
| RF inputs | | | 2 UHF SAT | |
| Nominal gain | dB | | 35 | -2 |
| Gain adjustment | dB | | 0 - 15 | - |
| Noise figure | dB | | ≤ 2 | |
| Output level (DIN-8, -60dB) | dBμV | | 105 | - |
| Input isolation | | | ≥26 | |
| Operation voltage | Voc | | +12 / +24 In the case of not using the SAT input, it can be supplied with +24 VDC | |
| Consumption | mA | | 40 | |
| Dimensions | mm | | 96 x 125 x 46 | |


Shielded power supplies. APB Series

the smallest
in the market!

NEW PRODUCT



APB-224-M




the only power supply that is integrated in a box of 80x80 mm



APB-112-M

«MICRO» power supply +24 VDC

| MODEL | APB-224-M | |
|-----------------------|-------------|--------------|
| REF. | 3437 | |
| Regulation type | switch mode | |
| Outputs | 2 | |
| Mains voltage (50 Hz) | VAC | 100 - 240 |
| Output voltage | VDC | +24 (±5%) |
| Output current | mA | 100 |
| Frequency range | MHz | 47 - 862 |
| RF insertion loss | dB | ≤ 4 |
| Dimensions | mm | 50 x 50 x 25 |

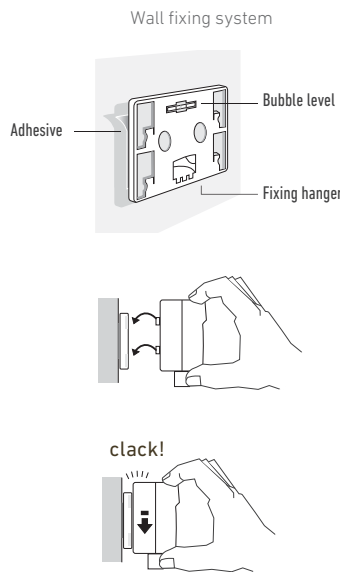


«MICRO» power supply +12 Vdc for SBA190 amplifier

| MODEL | APB-112-M | |
|-----------------------|-------------|--------------|
| REF. | 3436 | |
| Regulation type | switch mode | |
| Output | 1 | |
| Mains voltage (50 Hz) | VAC | 100 - 240 |
| Output voltage | VDC | +12 (±5%) |
| Output current | mA | 200 |
| Frequency range | MHz | 47 - 2400 |
| RF insertion loss | dB | ≤ 1.5 |
| Current pass through | mA | 300 |
| Dimensions | mm | 50 x 50 x 25 |



When the user's SAT receiver is OFF or stand-by, the APB-112-M power supply operates normally, providing +12V voltage for the mast-head preamplifier.

When the SAT receiver is switched ON, the APB-112-M comes automatically to stand-by and let pass the voltage/tone signals coming from the receiver, so that the LNB as well as the SBA190 preamplifier are powered by the SAT receiver.

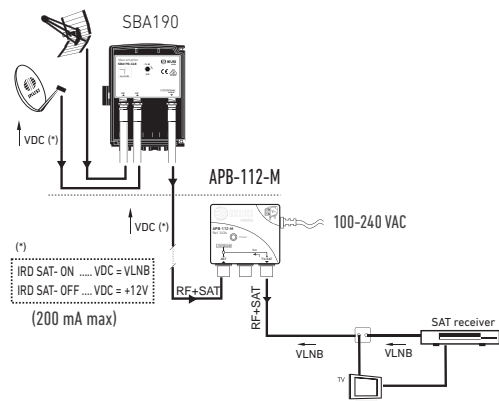

Amplifier+Power supply kits

| MODEL | REF. | DESCRIPTION |
|-------------|------|---|
| JSBA100-C69 | 1223 | Amplifier SBA100-C69 + Power supply APB-224-M |
| JSBA100-C60 | 1222 | Amplifier SBA100-C60 + Power supply APB-224-M |
| JSBA100-C48 | 1224 | Amplifier SBA100-C48 + Power supply APB-224-M |



Terr/Sat Amplifiers with Programmable Digital Technology



+Select
by IKUSI




ONE+ SAT

- With over 131 dB μ V in output level (IMD3 -36 dB)
- 32 tunable variable bandwidth VHF/UHF filters from 1 to 4 channels
- Input greater dynamic range (allows operation with weaker signals)
- Configuration copy & software field upgrade over microSD card
- Intuitive handling

ONE+ Programmable digital amplifiers

☐ The ONE+ and ONE+ SAT are programmable digital amplifiers, designed to selectively filter TV channels. Suitable for both household requirements and for collective housing, they are the perfect solution for managing signals of different frequencies and amplitudes.

Installation example

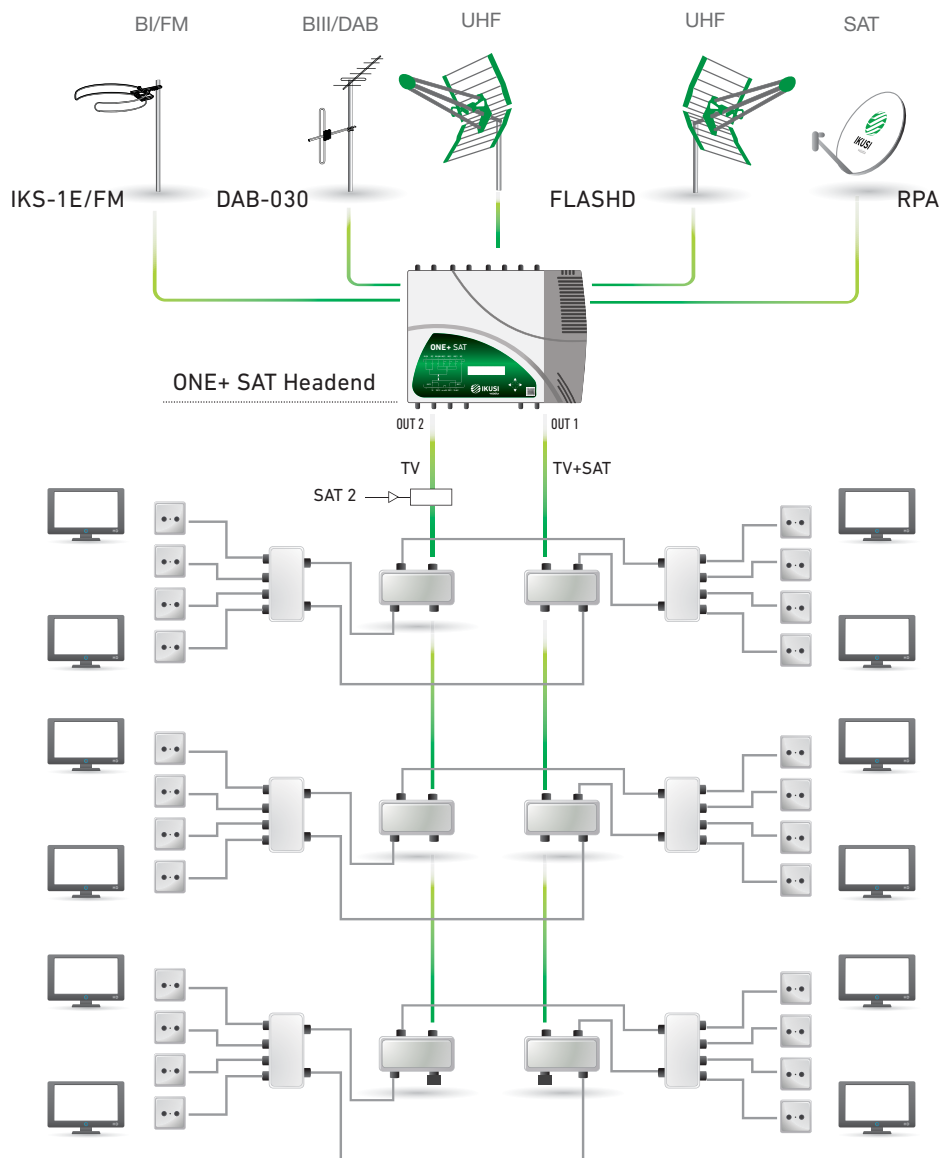

Terr/Sat amplifier with programmable digital technology

New

Lte1

Lte2



- Terrestrial and satellite programmable digital amplifier
- With over 131 dB μ V in output level (IMD3 -36 dB)
- Autoprogrammable in 10 seconds
- 32 variable-bandwidth UHF filters from 1 to 4 channels
- Inputs: BI/FM, DAB/BIII, EXT (VHF/UHF), 3x UHF, SAT
- Two types of configurable output:
 - 1 Output : OUT 1 [TERR (131 dB μ V) + SAT (122 dB μ V)]
 - 2 Outputs (ICT) : OUT 1 [TERR (128 dB μ V) + SAT (122 dB μ V)]
OUT 2 [TERR (122 dB μ V)]
- Equalisation and automatic gain control
- Joystick & microSD configuration
- Coming soon, remote maintenance over wifi & ethernet

| MODEL | | ONE+ SAT | | | | | | |
|--|--------------|--------------------------|---------------|-------------|---|-------------------------------------|---------|---------------------------------|
| REF. | | 2864 | | | | | | |
| TV system | | AM-TV / DVB-T | | | | | | |
| Inputs | | 7 | | | | | | |
| | | BI/FM | EXT (VHF/UHF) | BIII / DAB | UHF 3 | UHF 2 | UHF 1 | FI-SAT |
| Band covered | MHz | 47 - 108 | 47 - 862 | 174 - 240 | | 470 - 862 470 - 790 470 - 694 | | 950 - 2400 |
| Number of programmable filters | | - | | 32 | | | - | |
| Number of channels per filter | | | | 1 - 4 | | | | |
| Filter bandwidth | MHz | - | - | 7 / 8 / DAB | 8 / 16 / 24 / 32 | | | |
| Input level | dB μ V | 40 - 90 | 60 - 80 | 40 - 100 | | | 50 - 80 | |
| AGC (Automatic gain control) | | - | | Yes | | | - | |
| End-of-channel selectivity \pm 1 MHz | dB | - | | 35 | | | - | |
| Output level OUT 1 | dB μ V | 131 (IMD3 -36 dB) ; 122* | | | 131 (IMD3 -36 dB) ; 122* | | | 122 (IMD3 -35 dB) OUT 1 only |
| Output level OUT 1 + OUT 2 | dB μ V | 128 (IMD3 -36 dB) ; 119* | | | 128 (IMD3 -36 dB) ; 119* | | | |
| Output regulation | dB | 25 | 20 | 30 | | | 20 | |
| Equalization | dB | - | | | 0 - 6 | | | 0 - 9 |
| Noise figure | dB | < 6 | | | | | | |
| Test output | dB | -30 | | | | | | |
| Output voltage | VDC mA | - | | | Off - 12 - 24 100mA @ 24V 200mA @ 12V | | | Bypass - 13 - 18 300 |
| Tone | kHz | - | | | | | | 0-22 |
| Consumption | W | 25 | | | | | | |
| Operating temperature | $^{\circ}$ C | -5 ... +50 | | | | | | |
| Protection index | IP | IP30 | | | | | | |

* with 1 mux OFDM

Terrestrial amplifier with programmable digital technology

New

Lte1

Lte2



- Terrestrial and satellite programmable digital amplifier
- With over 131 dB μ V in output level (IMD3 -36 dB)
- Autoprogrammable in 10 seconds
- 32 variable-bandwidth UHF filters from 1 to 4 channels
- Inputs: BI/FM, DAB/BIII, EXT (VHF/UHF), 3x UHF, SAT
- Equalisation and automatic gain control
- Joystick & microSD configuration
- Coming soon, remote maintenance over wifi & ethernet

| MODEL | | ONE+ | | | | |
|--|--------------|--------------------------|-------------|---|-------|-------|
| REF. | | 2865 | | | | |
| TV system | | AM-TV / DVB-T | | | | |
| Inputs | | 5 | | | | |
| | | BI/FM | BIII / DAB | UHF 3 | UHF 2 | UHF 1 |
| Band covered | MHz | 47 - 108 | 174 - 240 | 470 - 862 470 - 790 470 - 694 | | |
| Number of programmable filters | | - | | 32 | | |
| Number of channels per filter | | - | | 1 - 4 | | |
| Filter bandwidth | MHz | - | 7 / 8 / DAB | 8 / 16 / 24 / 32 | | |
| Input level | dB μ V | 40 - 90 | 40 - 100 | | | |
| AGC (Automatic gain control) | | - | Yes | | | |
| End-of-channel selectivity \pm 1 MHz | dB | - | 35 | | | |
| Output level | dB μ V | 131 (IMD3 -36 dB) ; 122* | | 131 (IMD3 -36 dB) ; 122* | | |
| Output regulation | dB | 25 | 30 | | | |
| Equalization | dB | - | | 0 - 6 | | |
| Noise figure | dB | < 6 | | | | |
| Test output | dB | -30 | | | | |
| Output voltage | VDC mA | - | | Off - 12 - 24 100mA @ 24V 200mA @ 12V | | |
| Consumption | W | 17 | | | | |
| Operating temperature | $^{\circ}$ C | -5 ... +50 | | | | |
| Protection index | IP | IP30 | | | | |

* with 1 mux OFDM

Rejection of LTE frequencies for 2nd digital dividend




FLTE-481

FLTE-482

- Rejection of LTE frequencies for 2nd dividend
- 2 models: Indoor and outdoor
- Maximum attenuation for LTE frequencies
- High selectivity and minimal losses



| MODEL | FLTE-481 | | FLTE-482 | | |
|-----------------------|---------------|----------|-----------|----------------------------------|-----------|
| REF. | 1436 | | 1437 | | |
| Installation type | Indoor | | Outdoor | | |
| Cut-off at channel | 48 channel | | | | |
| Pass band frequencies | MHz 470 - 694 | | | | |
| Frequencies range | MHZ | 0 - 686 | 686 - 694 | 698 - 733 | 733 - 862 |
| Insertion losses | dB | <1.5 | <2.5 | >5 | >25 |
| Dimensions | mm | 70 x 30ø | | 55 x 40 x 15 with protective box | |

Installation example

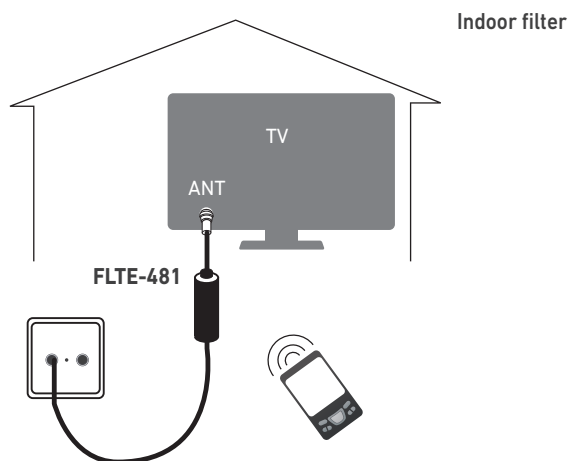

Filter attenuation graph

— FLTE-481 graph
— FLTE-482 graph

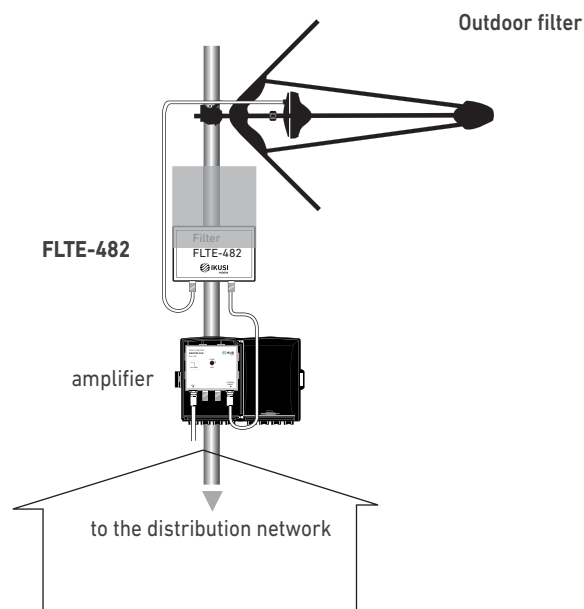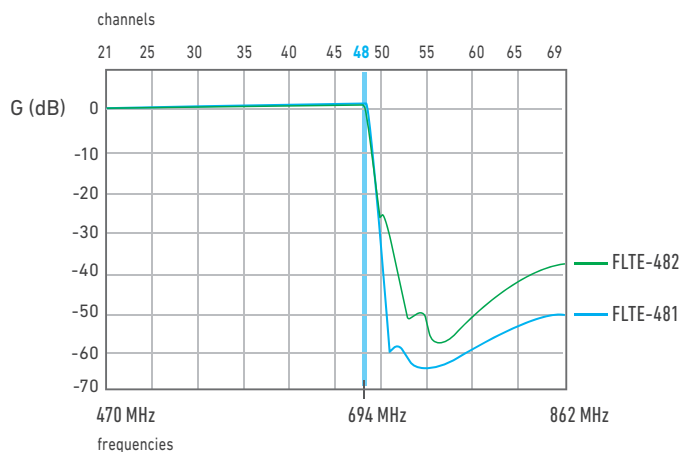



+Select by IKUSI



PREPARADOS PARA EL SEGUNDO DIVIDENDO DIGITAL



www.ikusitv.com



Broadband amplifiers with high, medium and low power




NBS800/600

- Adapted to the first and second digital dividend
- High-power broadband amplifiers, for terrestrial and satellite signals in small installations
- Interstage input attenuators
- Power passing to input
- Output test for checks without disconnecting the service

NBS amplifiers headend

Amplifies, equalizes and combines analog or digital radio and television signals in medium size facilities.

Installation example

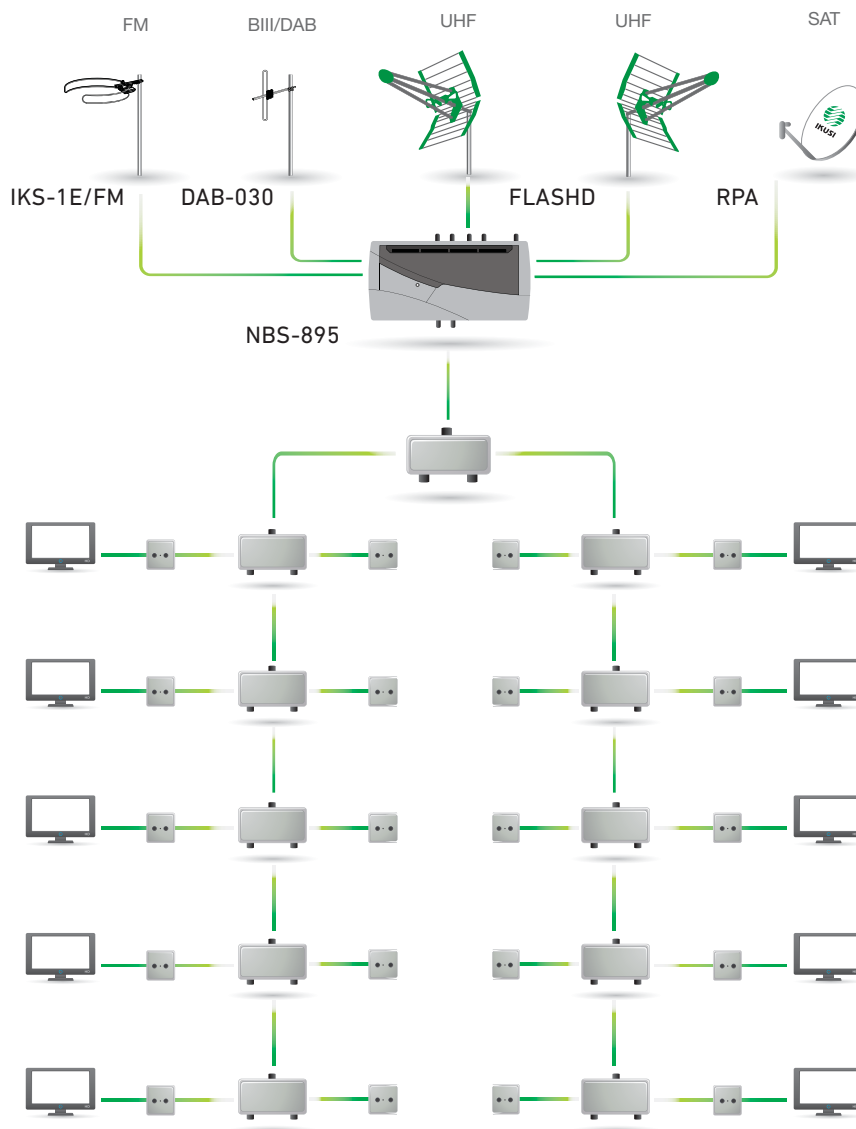



Terrestrial and satellite headend amplifiers. NBS series

LTE1 **LTE2**



- Adapted to the first and second digital dividend.
- High-power broadband amplifiers, for terrestrial and satellite signals in small installations. NBS800 series high-power broadband amplifiers, NBS600 series mid-power broadband amplifiers.
- Interstage input attenuators.
- SAW filtering.
- Powered by switching power supply, in removable box.
- Power passing to input.
- Zamak housing with protective cover for adjustment potentiometers.
- F Connectors. Wall fixing and indoor mounting. Grounding terminal.
- Compatible with UNICABLE TM

- High-power broadband amplifiers **NBS-800** series
Output level:
TV: 118 dB μ V
IF-SAT: 120 dB μ V

| MODEL (REF.) | | NBS-801-C69 (3571) NBS-801-C60 (3572) NBS-801-C48 (3573) | NBS-804-C69 (3562) NBS-804-C60 (3563) NBS-804-C48 (3564) | NBS-895-C69 (3574) NBS-895-C60 (3575) NBS-895-C48 (3576) |
|---|-----------------|---|--|--|
| Inputs | | 1 | 4 BI/FM - BIII/DAB - 2xUHF | 5 BI/FM - BIII/DAB - 2xUHF - FI SAT |
| Frequency range | MHz | 45-862 NBS-801-C69 45-790 NBS-801-C60 45-694 NBS-801-C48 | BI/FM: 45-112 BIII/DAB: 174-240 2xUHF: 470-862 NBS-804-C69 470-790 NBS-804-C60 470-694 NBS-804-C48 | BI/FM: 45-112 BIII/DAB: 174-240 2xUHF: 470-862 NBS-895-C69 470-790 NBS-895-C60 470-694 NBS-895-C48 FI-SAT: 950-2400 |
| Gain | dB | 42 | BI/FM: 42 BIII/DAB: 42 2xUHF: 45 | BI/FM: 42 BIII/DAB: 42 2xUHF: 45 FI-SAT: 40 |
| Gain adjustment | dB | 0 - 18 | 0 - 18 | 0 - 18 |
| Slope control range | dB | 0 - 12  | — | FI-SAT: 0 / 6  bridge |
| Response flatness | dB | ± 2 | BI/FM: ± 2 BIII/DAB: ± 2 2xUHF: ± 1.5 | BI/FM: ± 2 BIII/DAB: ± 2 2xUHF: ± 1.5 FI-SAT: ± 2 |
| Outputs | | 1 | 1 | 1 |
| Output test | dB | -30 | -30 | -30 |
| Output level Terr: (DIN-45004B IMD -60 dB) Sat: (EN 50083-3 IMD -35 dB) | dB μ V | 118 | BI/FM: 118 BIII/DAB: 118 2xUHF: 118 | BI/FM: 118 BIII/DAB: 118 2xUHF: 118 FI-SAT: 120 |
| Noise figure | dB | 6 | BI/FM: 6 BIII/DAB: 6 2xUHF: 8 | BI/FM: 6 BIII/DAB: 6 2xUHF: 8 FI-SAT: 9 |
| Input/output return loss | dB | 10 | 10 | BI/FM-BIII/DAB-2xUHF: 10 FI-SAT: 6 |
| Voltage/current preamplifier mast | | 12-24V 100mA | UHF2: 12-24V 100 mA | UHF2: 0-12-24 V · 100 mA FI SAT: 0-13-18V · 100 mA LNB: 0-22 kHz |
| Mains supply voltage (+10% -15%) | V _{AC} | 230-240 | 230-240 | 230-240 |
| Consumption | W | 8 | 8 | 16 |
| Dimensions | mm | 230 x 145 x 43 | | |

• Models NBS895 Compatible with UNICABLE™

Terrestrial and satellite amplifiers

LTE1 **LTE2**



- Midi power broadband amplifiers NBS-600 series
Output level:
TV: 112 dB μ V
IF-SAT: 114 dB μ V

| MODEL(REF.) | | NBS-604-C69 (3565) NBS-604-C60 (3566) NBS-604-C48 (3567) | NBS-695-C69 (3568) NBS-695-C60 (3569) NBS-695-C48 (3570) |
|---|------------|--|--|
| Inputs | | 4 BI/FM - BIII/DAB - 2xUHF | 5 BI/FM - BIII/DAB - 2xUHF - FI SAT |
| Frequency range | MHz | BI/FM: 45-112 BIII/DAB: 174-240 2xUHF: 470-862 NBS-604-C69 470-790 NBS-604-C60 470-694 NBS-604-C48 | BI/FM: 45-112 BIII/DAB: 174-240 2xUHF: 470-862 NBS-695-C69 470-790 NBS-695-C60 470-694 NBS-695-C48 FI-SAT: 950-2400 |
| Gain | dB | BI/FM: 36 BIII/DAB: 36 2xUHF: 39 | BI/FM: 36 BIII/DAB: 36 2xUHF: 39 FI-SAT: 34 |
| Gain adjustment | dB | 0 - 18 | 0 - 18 |
| Slope control range | dB | — | FI-SAT: 0 / 6 ○ ○ bridge |
| Response flatness | dB | BI/FM: ± 2 BIII/DAB: ± 2 2xUHF: ± 1.5 | BI/FM: ± 2 BIII/DAB: ± 2 2xUHF: ± 1.5 FI-SAT: ± 2 |
| Outputs | | 1 | 1 |
| Output test | dB | -30 | -30 |
| Output level Terr: (DIN-45004B IMD -60 dB) Sat: (EN 50083-3 IMD -35 dB) | dB μ V | BI/FM: 112 BIII/DAB: 112 2xUHF: 112 | BI/FM: 112 BIII/DAB: 112 2xUHF: 112 FI-SAT: 114 |
| Noise figure | dB | BI/FM: 6 BIII/DAB: 6 2xUHF: 8 | BI/FM: 6 BIII/DAB: 6 2xUHF: 8 FI-SAT: 9 |
| Input/output return loss | dB | 10 | BI/FM-BIII/DAB-2xUHF: 10 FI-SAT: 6 |
| Voltage/current preamplifier mast | | UHF2: 12-24V 100 mA | UHF2: 0-12-24 V · 100 mA FI SAT: 0-13-18V · 100 mA LNB: 0-22 kHz |
| Mains supply voltage | VAC | 230-240 | 230-240 |
| Consumption | W | 5 | 8 |
| Dimensions | | 230 x 145 x 43 | |

- Models NBS695 Compatible with UNICABLE™

Terrestrial amplifier



- Low-power broadband amplifier NBS-204
Output level:
TV: 106 dB μ V

| MODEL | | NBS-204 |
|--------------------------------------|------------|--|
| REF. | | 3516 |
| Inputs | | 4 BI-FM-BIII/DAB-UHF |
| Frequency range | MHz | BI: 45-68 FM: 88-108 BIII/DAB: 174-240 UHF: 470-790 |
| Gain | dB | BI: 31 FM: 31 BIII/DAB: 31 UHF: 31 |
| Gain adjustment | dB | BI-FM-BIII/DAB: 0 - 18 UHF: 0 - 15 |
| Slope control range | dB | — |
| Response flatness | dB | BI-FM-BIII/DAB: ± 2 UHF: ± 2 |
| Outputs | | 1 |
| Output test | dB | -30 |
| Output level (DIN-45004B IMD -60 dB) | dB μ V | 106 |
| Noise figure | dB | BI-FM-BIII/DAB: 4.5 UHF: 5 |
| Input/output return loss | dB | 10 |
| Mains supply voltage | VAC | 240 (+10% -15%) |
| Consumption | W | 3 |
| Dimensiones | mm | 155 x 80 x 40 |

Headend configurable modular UHF amplifier with digital technology

+Select
by IKUSI

New




- With digital technology
- Super-selective filtering
- Any channel configured by installer
- Multi-channel: Expansion up to 4 channels
- Fast and easy to install
- Stock optimization

SZB Headend

TV amplifiers single-channels, multichannels, modulators and Sat-IF combiner ready for digital dividend.

Installation example

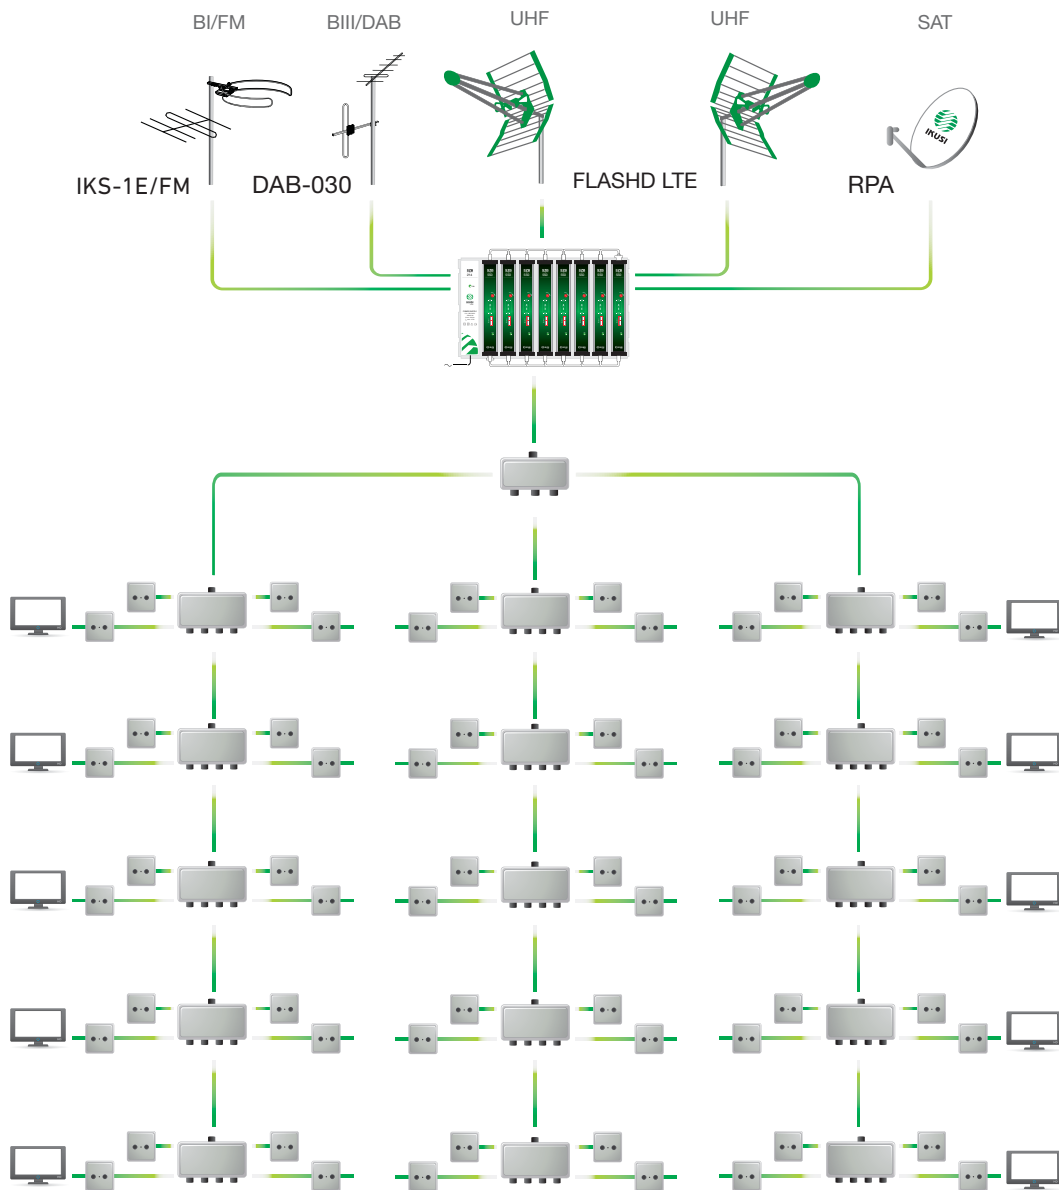

Configurable modular UHF amplifier



New




- Simple manual configuration by installer.
- A single stock reference throughout the UHF band (Ch21... 48).
- Compatible with existing headends, same format, same power.
- Automatic gain / stability control over output signal.
- Filter adjustable from one to four channels.
- Greater input dynamic range (allows operation with weaker signals).
- Low-level noise figure.
- Tool-free assembly on bases-wall attachment supports.


| Model | | SZB+550 | | | |
|--|--------------|---------------|---|---|---|
| Ref. | | 2260 | | | |
| TV system | | AM-TV / DVB-T | | | |
| Connection | | F connector | | | |
| Band covered | MHz | 470 - 694 | | | |
| Filter number | | 1 | 2 | 3 | 4 |
| Bandwidth of each filter | MHz | 8 | | | |
| Input level | dB μ V | 40 - 90 | | | |
| Automatic Gain Control | | Yes | | | |
| Output regulation | dB | 30 | | | |
| Typical output level (IMD3 -35 dB) * | dB μ V | 121 | | | |
| End-of-channel selectivity \pm 1 MHz | dB | 55 | | | |
| Z output return loss | dB | > 10 | | | |
| Z output step los | dB | 0.5 | | | |
| Power supply | VDC | +24 | | | |
| Typical consumption | mA | 250 | | | |
| Operating temperature | $^{\circ}$ C | 0 ... + 45 | | | |

* EN 50083-3

Comparison of selectivity between Ikusi **SZB+550** amplifier and others on the market

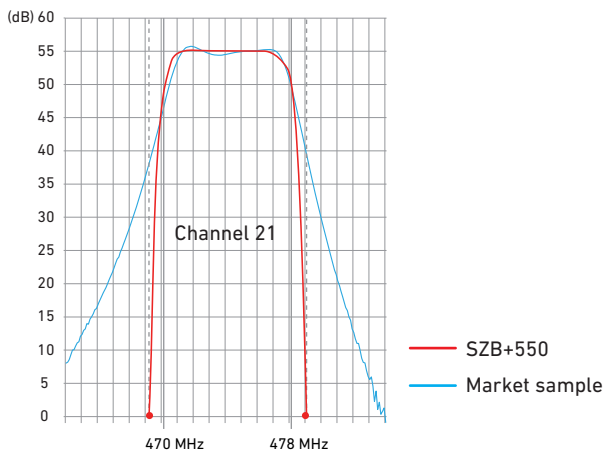

Channel configuration

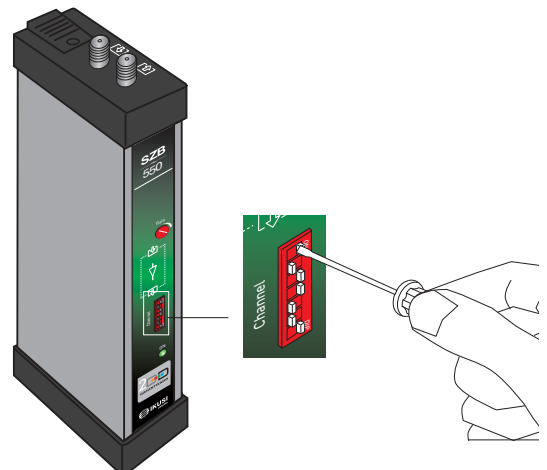

TV single-channel amplifiers



- Ready for digital dividend.
- TV single-channel amplifiers, Z input de-multiplexing and Z output multiplexing. Adjacent channel operation allowed in UHF band.
- FM Radio and DAB Amplifiers.
- It is advisable to place the amplifiers on the base-plate following an increasing order of number of channel (frequency). The RF output of the headend will be taken from the last one of the modules ordered in this way.
- Toolless mounting.

| MODEL | | SZB-129 | SZB-128 | SZB-168 | SZB-139 | SZB-148 * |
|-----------------------------------|------|-----------------------|---------|---------|-----------------------------|----------------------------|
| REF. | | 2294 | 2293 | 3160 | 3152 | 2246 |
| Bandwidth | | FM | FM | DAB | 1 channel BIII ¹ | 1 channel UHF ² |
| Gain ^{3,4} | dB | 57 | 30 | 53 | 56 | 52 |
| Noise figure | dB | 4 | 7,5 | 8 | 7 | 9 |
| Output level EN 50083-3, -35dB | dBμV | (2x) 113 IMD -50dB | | | (2x) 121 | |
| Z output return loss | dB | ≥ 6 | | | | |
| Consumption | mA | 100 | 80 | 100 | 100 | 100 |
| Dimensions | mm | 190 x 38 x 87 | | | | |

* SZB-148 high selectivity. Amplification of one digital UHF channel, either non-adjacent or adjacent.

Sat-IF Combiner/Amplifier



- 1 Satellite input 950-2150 MHz with adjustable gain and sloped response to compensate for cable loss; 1 terrestrial coupling input 5-862 MHz; 1 satellite+terrestrial output.
- Automatic power connection, either via contact terminal (SZB application) or via terrestrial coupling input port (MZ6 applications).
- LNB coax line powering. The SZB-190 generates the required voltage/ tone signals for the selection of H/V polarisation and high/low frequency sub-band. Programmable values by micro-switches.

| MODEL | SZB-190 | |
|--|----------------------------|-------------------------------------|
| REF. | 1346 | |
| Sat-IF band | MHz | 950 - 2150 |
| Gain (7 dB fixed slope) | dB | 33 (950 MHz) 40 (2150 MHz) |
| Gain adjustment | dB | 18 |
| Output level (IMD -35dB, EN 50083-3) | dBμV | 120 |
| Noise figure | dB | < 8 |
| Terrestrial band | MHz | 5 - 862 |
| Terrestrial coupling loss | dB | < 1 |
| Operating voltage | Voc | + 24 |
| Consumption | mA | 120 |
| Insertable voltage/tone to Sat-IF input port | +13 / +18 Voc ; 0 / 22 kHz | |
| Max LNB power current | mA | 350 (at +18 Voc) / 250 (at +13 Voc) |

Power supply

| MODEL | SZB-214 | |
|-----------------------|---------|----------------------|
| REF. | 2250 | |
| Mains voltage | VAC | 100 - 240 (50/60 Hz) |
| | W | 120 |
| Output voltage | VDC | +24 |
| Max. output current | A | 4,5 |
| Operating temperature | °C | -10 ... +55 |
| Protection level | IP | IP20 |



SZB-214

Accessories

| MODEL | REF. | DESCRIPTION |
|---------|------|--|
| BAS-919 | 2225 | Base plate with power connecting bar. Capacity: 1 power supply+8 RF modules SZB; or 9 RF modules |
| BAS-915 | 2220 | Base plate with power connecting bar. Capacity: 5 modules |
| BAS-913 | 2222 | Base plate with power connecting bar. Capacity: 3 modules |
| COF-809 | 2224 | Housing for 1 BAS-919. Dimensions: 420 x 346 x 180 mm |
| PZB-453 | 2247 | Z plug bridge, F connectors. Length 45,3 mm |
| PZL-017 | 2272 | Bridge to connect new and existing headers. Length 200 mm |
| CTF-075 | 2221 | Charge 75Ω. |



BAS-919



BAS-915



BAS-913



PZB-453




PZL-017



CTF-075

Terrestrial and Satellite broadband amplifiers adapted to the digital dividend for indoor home installation

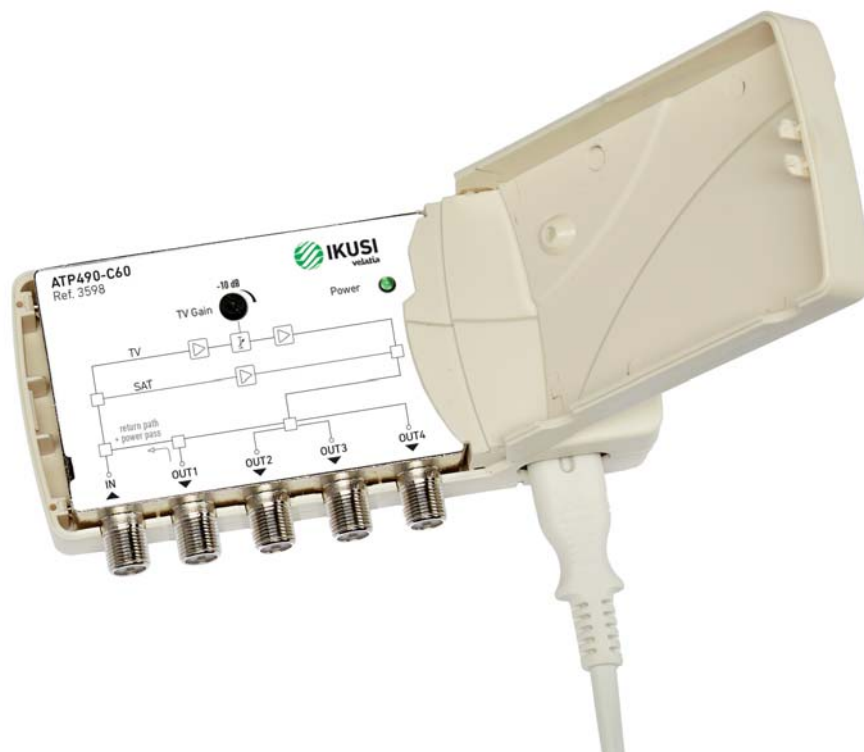


- Mini headend for a household with several reception antenna
- Models adapted to the 1st and 2nd Digital Dividend
- Gain adjustment potentiometers
- Power supply extended range
- Included wall fixing system


ATP amplifiers

☐ Ideal for extending the household network

Application example

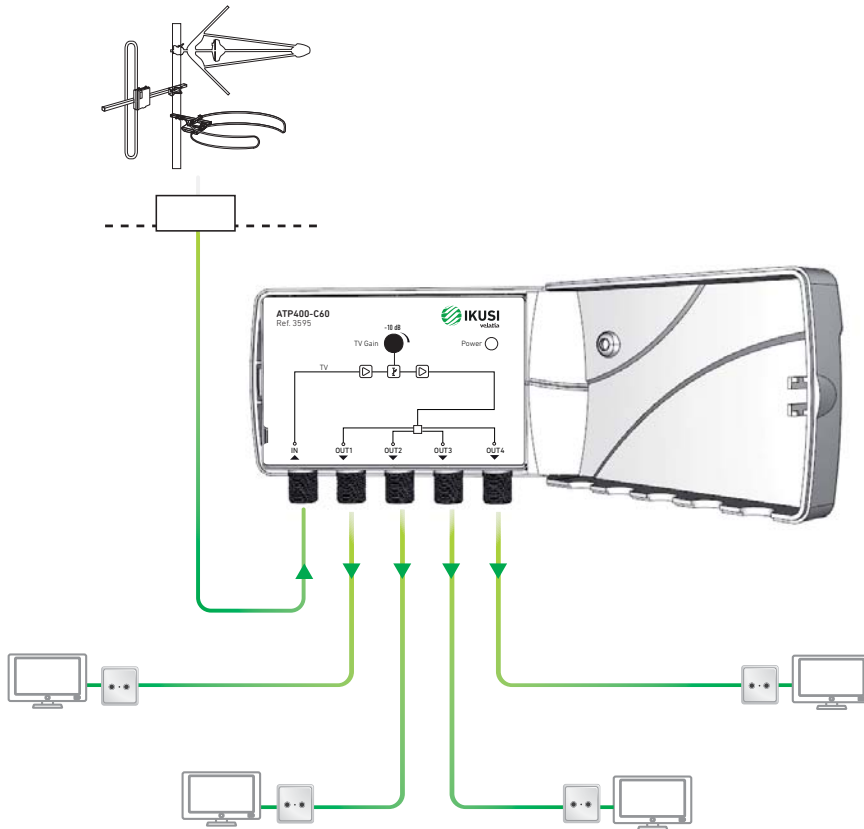

Easy to fix/release the amplifier to the wall

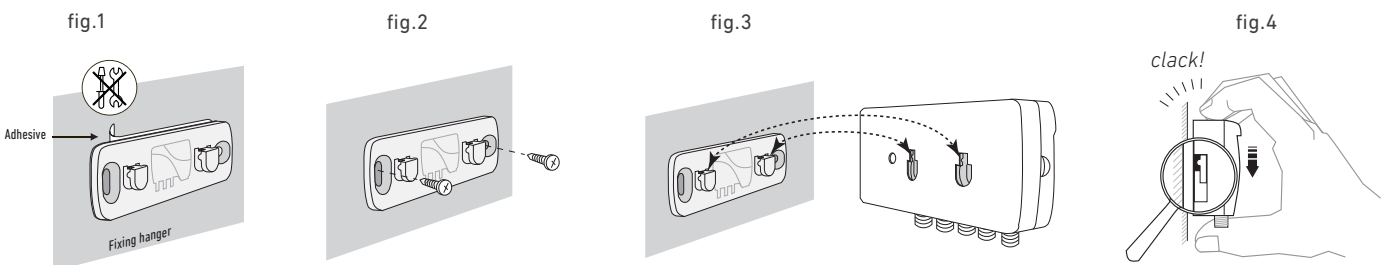

Apartment amplifier. ATP series



Lte1

Lte2



ATP190



ATP490



ATP290


- Models adapted to the 1st and 2nd Digital Dividend.
- Terrestrial and satellite outputs.
- Gain adjustment potentiometers.

- Return path in ATP-190, ATP-290 and ATP-490 series.
- Power supply extended range (110VAC-240VAC).
- Mains lead with bipolar plug.

| MODEL | REF. | ATP-190 series | | |
|-----------------------|------|---------------------|--|---------------------------------------|
| ATP-190-C69 | 3588 | Frequency range MHz | 47 - 862 | 950 - 2400 |
| ATP-190-C60 | 3589 | | 47 - 790 (1 st dividend) | |
| ATP-190-C48 | 3590 | | 47 - 694 (2 nd dividend) | |
| Inputs | | | 1 | |
| Outputs | | | 1 | |
| Gain | dB | | Terr: >18 | Sat: >22 |
| Gain adjustment | dB | | Terr: >10 | - |
| Output level | dBµV | | Terr: 106 (IMD3 -60dB (DIN 45004B)) | Sat: 112 (IMD3 -35dB (EN 50083-3)) |
| Return path frequency | MHz | | 5 - 30 | |
| Noise figure | dB | | <5 | <6 |
| Mains supply voltage | VAC | | 100 - 240 | |
| DC transit | mA | | 500 | |
| Consumption | W | | <3 | |
| Dimensions | mm | | 135 x70 x 30 | |

| MODEL | REF. | ATP-290 series | | |
|-----------------------|------|---------------------|--|---------------------------------------|
| ATP-290-C69 | 3591 | Frequency range MHz | 47 - 862 | 950 - 2400 |
| ATP-290-C60 | 3592 | | 47 - 790 (1 st dividend) | |
| ATP-290-C48 | 3593 | | 47 - 694 (2 nd dividend) | |
| Inputs | | | 1 | |
| Outputs | | | 2 | |
| Gain | dB | | Terr: >14 | Sat: >18 |
| Gain adjustment | dB | | Terr: >10 | - |
| Output level | dBµV | | Terr: 102 (IMD3 -60dB (DIN 45004B)) | Sat: 108 (IMD3 -35dB (EN 50083-3)) |
| Return path frequency | MHz | | 5 - 30 (OUT1) | |
| Noise figure | dB | | <5 | <6 |
| Mains supply voltage | VAC | | 100 - 240 | |
| DC transit | mA | | 500 (OUT1) | |
| Consumption | W | | <3 | |
| Dimensions | mm | | 135 x70 x 30 | |

| MODEL | REF. | ATP-490 series | | |
|-----------------------|------|---------------------|---------------------------------------|---------------------------------------|
| ATP-490-C69 | 3597 | Frequency range MHz | 47 - 862 | 950 - 2400 |
| ATP-490-C60 | 3598 | | 47 - 790 (1 st dividend) | |
| ATP-490-C48 | 3599 | | 47 - 694 (2 nd dividend) | |
| Inputs | | | 1 | |
| Outputs | | | 4 | |
| Gain | dB | | Terr: >10 | Sat: >14 |
| Gain adjustment | dB | | Terr: >10 | - |
| Output level | dBµV | | Terr: 99 (IMD3 -60dB (DIN 45004B)) | Sat: 105 (IMD3 -35dB (EN 50083-3)) |
| Return path frequency | MHz | | 5 - 30 (OUT1) | |
| Noise figure | dB | | <6 | <7 |
| Mains supply voltage | VAC | | 100 - 240 | |
| DC transit | mA | | 500 (OUT1) | |
| Consumption | W | | <3 | |
| Dimensions | mm | | 135 x70 x 30 | |

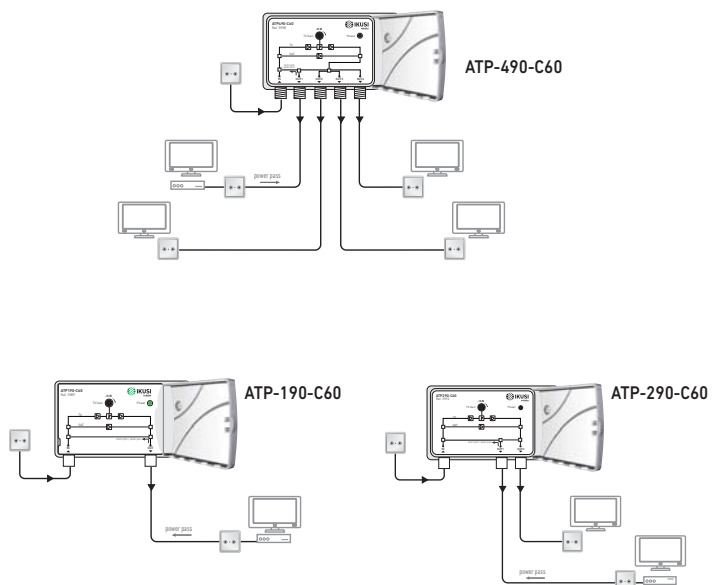

Apartment amplifier. ATP series



Lte1

Lte2



ATP200





ATP400

- Models adapted to the 1st and 2nd Digital Dividend.
- Gain adjustment potentiometers.

- Models adapted to the 1st and 2nd Digital Dividend.
- Power supply extended range 100-240 VAC.
- Mains powered, 50/60 Hz. Mains lead with bipolar plug.

| MODEL | REF. | ATP-200 series | |
|----------------------|------|---------------------|-------------------------------------|
| ATP-200-C69 | 3583 | Frequency range MHz | 47 - 862 |
| ATP-200-C60 | 3434 | | 47 - 790 (1 st dividend) |
| ATP-200-C48 | 3584 | | 47 - 694 (2 nd dividend) |
| Inputs | | | 1 |
| Outputs | | | 2 |
| Gain | dB | | 25 |
| Gain adjustment | dB | | 15 |
| Output level | dBµV | | 103 |
| Noise figure | dB | | <4 |
| Mains supply voltage | VAC | | 100 - 240 |
| Consumption | W | | <1,5 |
| Dimensions | mm | | 90 x 58 x 27 |

| MODEL | REF. | ATP-400 series | |
|----------------------|------|---------------------|-------------------------------------|
| ATP-400-C69 | 3594 | Frequency range MHz | 47 - 862 |
| ATP-400-C60 | 3595 | | 47 - 790 (1 st dividend) |
| ATP-400-C48 | 3596 | | 47 - 694 (2 nd dividend) |
| Inputs | | | 1 |
| Outputs | | | 4 |
| Gain | dB | | >22 |
| Gain adjustment | dB | | >15 |
| Output level | dBµV | | >103 |
| Noise figure | dB | | <4 |
| Mains supply voltage | VAC | | 100 - 240 |
| Consumption | W | | <3 |
| Dimensions | mm | | 135 x 70 x 30 |

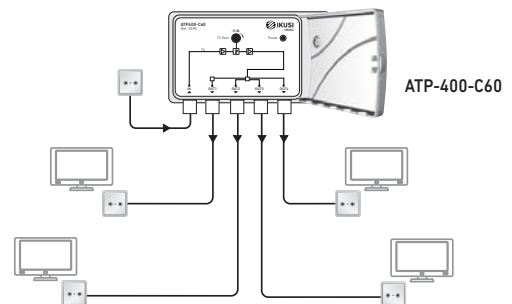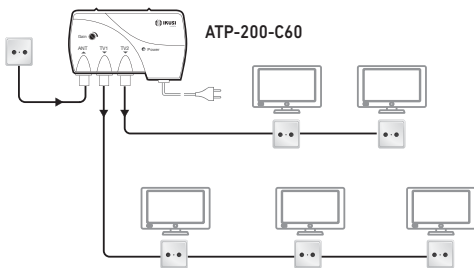


TV-SAT combiner



- 1 satellite 950-2450 MHz input port, with gain adjustment potentiometer;
- 1 terrestrial coupling 5-790 MHz input port;
- 1 satellite+Terrestrial output port;
- 1 output test port.
- Line powering of LNB. Voltage/tone injection for selection of polarity and band by rotary commutator.
- Universal alternating power supply. Electrical safety protection level Class II. Insertable power cord with bipolar plug.
- Plastic box with protective cover. F type connectors.
- Indoor mounting through an fixing hanger.

| MODEL | | AFI-190 |
|---|------|--|
| REF. | | 3461 |
| TV frequency band | MHz | 5 - 790 |
| SAT frequency Band | MHz | 950 - 2450 |
| Inputs (TV and SAT) | | 2 |
| Salida (TV+SAT) | | 1 |
| TV+SAT output test | dB | -30 |
| TV Gain (passive) | dB | -1 |
| SAT Gain | dB | > 34 |
| SAT gain adjustment | dB | 0 - 15 |
| Output level (IMD3 -35 dB, EN 50083-3) | dBμV | 120 |
| Input/output return loss | dB | ≥ 6 |
| Noise figure | dB | < 8 |
| Mains supply voltage | VAC | 100 - 240 |
| Regulation type | | Switched mode |
| Insertable Voltage/Tone to SAT input port | | 0V ; 13V+22kHz ; 18V+22kHz ; 18V ; 13V |
| Max LNB power current | mA | 200 (+13 VDC / +18 VDC) |
| Consumption | W | < 6 |
| Dimensions | mm | 120 x 85 x 50 |

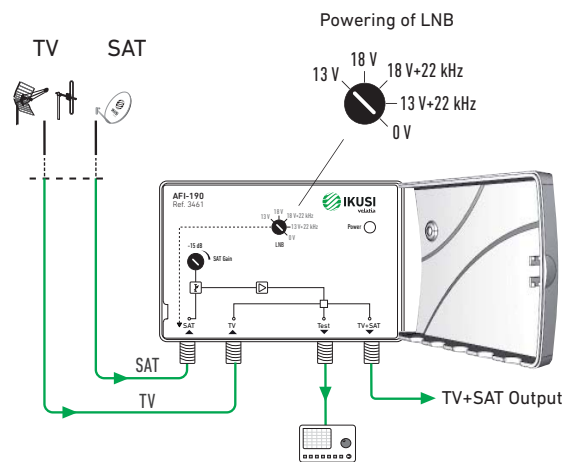

Easy to fix/release the amplifier to the wall

fig.1




fig.2




fig.3



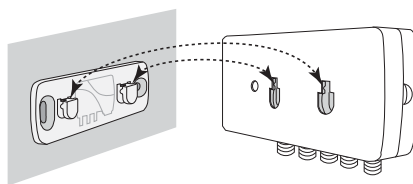


fig.4




Apartment amplifiers

ATP Series

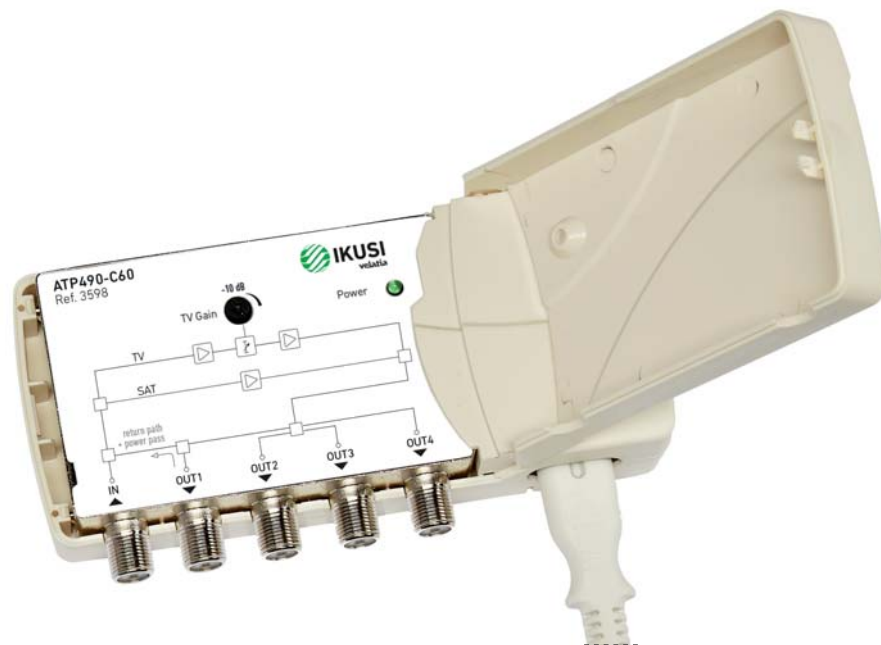

Installation example

- 5 models
 - . 1, 2 and 4 Terr/Sat/VR outputs.
 - . 2 and 4 Terr outputs.
- Models adapted to the 1st and 2nd Digital Dividend (channels 48 or 60).
- Easy to fix/release the amplifier to the wall.

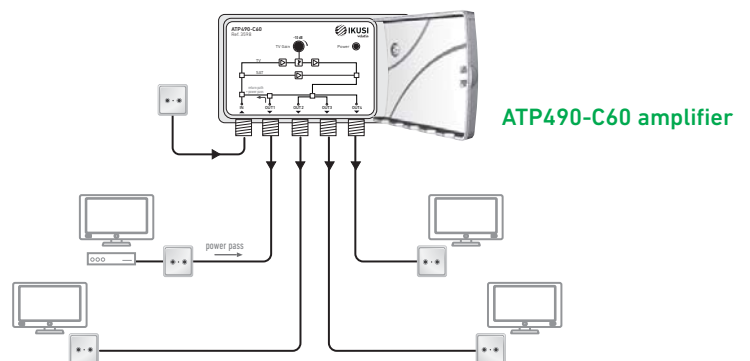

ATP490-C60 amplifier



862 MHz and 2150 MHz amplifiers with active return path



TAE1125




SAE-920

- Terrestrial and IF satellite distribution signals
- Attenuation and equalization adjustments of TV signals by potentiometer
- TV signal output and reverse path input
- Low consumption
- Attenuation and equalization adjustments

□ Distribution of television, sound and interactive multimedia signals. Ideal for hotels and dense multiple dwelling units.

Installation example

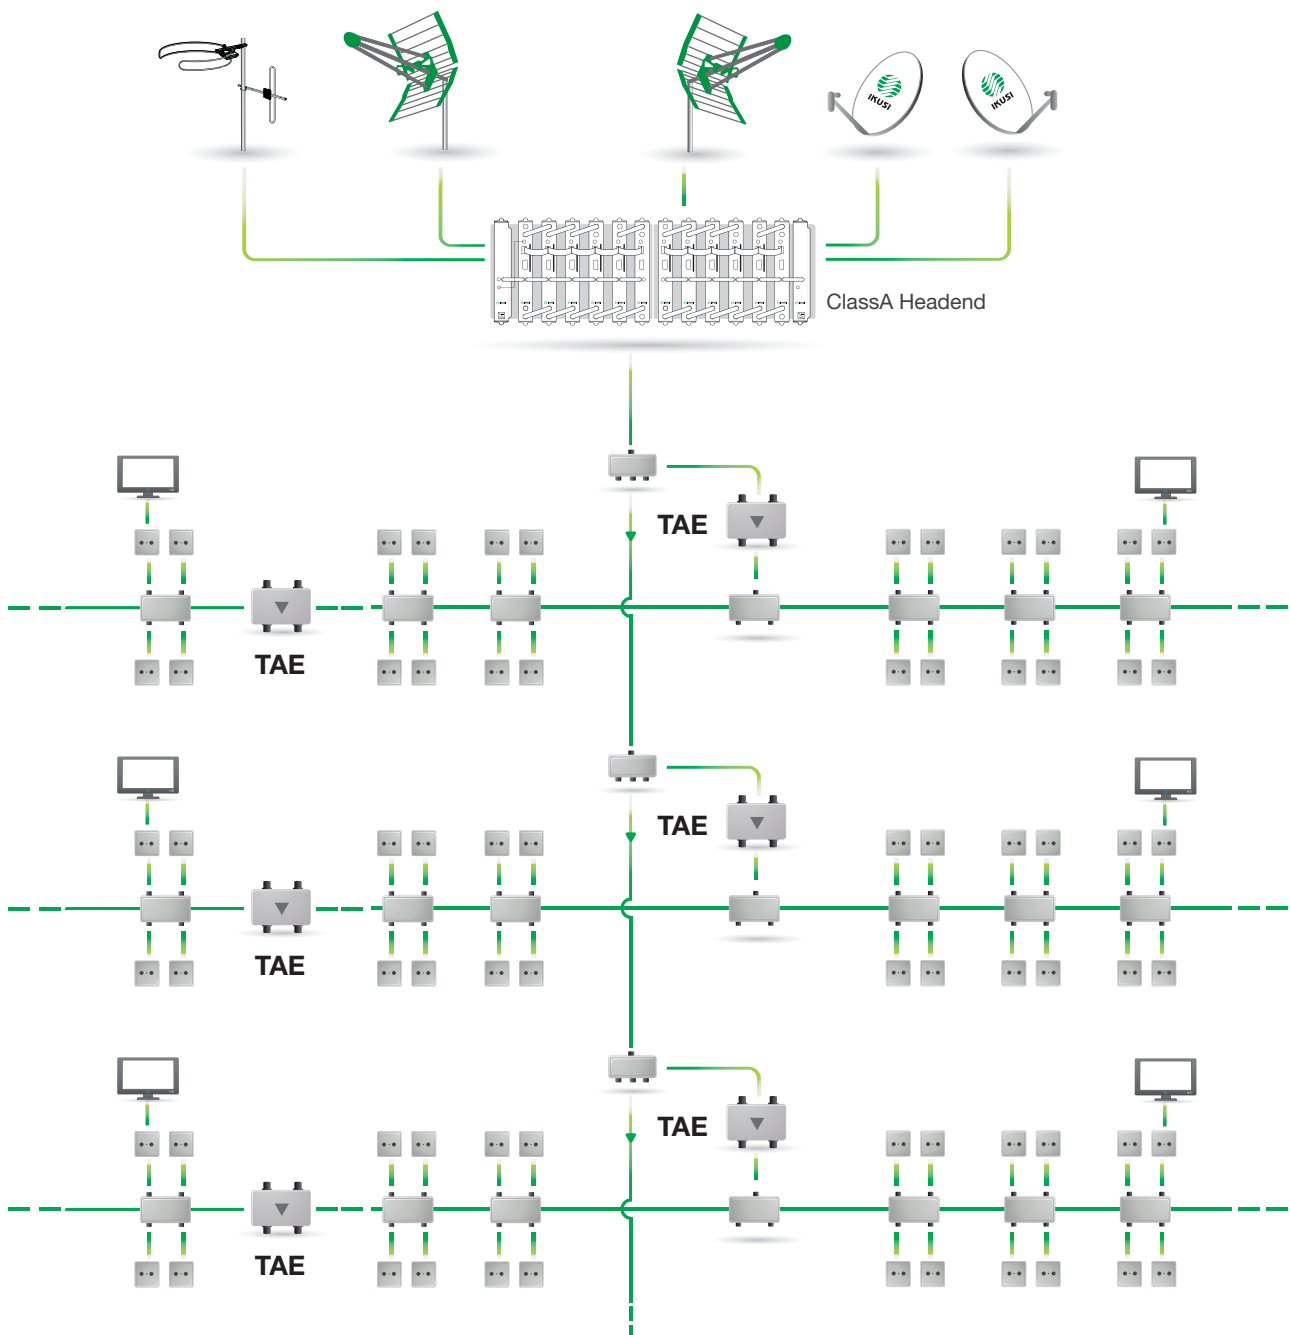

TAE amplifiers series



TAE1125 . TAE1118 . TAE1120

- TAE series, ideal for hotels and dense multiple dwelling units.
- 862 MHz amplifiers with active return path on all models.
- Mains or line powering 50/60. Operation shown by led. Mains lead insertable in connection socket.
- Attenuation and equalization adjustments of TV signals by potentiometer. Selection of return signal attenuation by the insertion of small plug-in links provided.
- Forward and reverse output test.
- Power Doubling technology (TAE1125) and Push-pull technology (TAE1120 and TAE1118).
- Zamak housing with protective cover for the adjustment controls. Wall fixing. Indoor mounting. Grounding terminal.
- Removable Power Supply.

| MODEL | | TAE1125 | TAE1120 | TAE1118 |
|---|------|----------------|----------------|----------------|
| REF. | | 3249 | 3264 | 3263 |
| Powering mode | | Mains | Mains | Mains |
| Bandwidth-Forward path | MHz | 86 - 862 | 86 - 862 | 86 - 862 |
| Bandwidth-Reverse path | MHz | 5 - 66 | 5 - 66 | 5 - 66 |
| Forward path | | | | |
| Response flatness | dB | ±0.75 | ±0.75 | ±0.75 |
| Nominal gain | dB | 35 | 35 | 35 |
| Input variable attenuator | dB | 0 - 18 | 0 - 18 | 0 - 18 |
| Slope control range | dB | 0 - 18 | 0 - 18 | 0 - 18 |
| Noise figure | dB | ≤ 5 | ≤ 8 | ≤ 8 |
| Output level (DIN 45004B -60dB) | dBμV | 124 | 120 | 118 |
| Output level (CTB, CSO -60dB, EN 42 ch) | dBμV | 108 | 104 | 103 |
| Output test | dB | -30 | -30 | -20 |
| Reverse path | | | | |
| Nominal gain | dB | 25.5 | 25.5 | 12 |
| Input variable attenuator | dB | 0 - 18 | 0 - 18 | 0 - 11 |
| Noise figure | dB | ≤ 7 | ≤ 7 | ≤ 7 |
| Output level (-60dB, DIN 45004B) | dBμV | 115 | 110 | 110 |
| Output test | dB | -30 | -30 | -20 |
| General | | | | |
| Operating supply voltage | Vac | 230-240 | 230-240 | 230-240 |
| Consumption | W | 15 | 10 | 10 |
| Dimensions | mA | 222 x 140 x 44 | 222 x 140 x 44 | 222 x 140 x 44 |

SAE amplifiers series



SAE-912 . SAE-916



SAE-920

- Distribution of terrestrial TV, satellite IF and multimedia signals.
- 1 RF input - 1 RF output.
- Terrestrial and satellite frequencies amplified separately.
- Passive or active return path, with respective 35/45 MHz or 65/86 MHz splits, depending model.
- Attenuation and equalization adjustments of TV and IF signals by potentiometer.
- Zinc alloy housing with protective cover. F connectors. Wall fixing. Indoor mounting.

- Application in collective installations with two download distribution cables carrying 2 satellite IF and 1 terrestrial TV signals.
- 1 TV + IF-1 input — 1 IF-2 input
1 TV + IF-1 output — 1 TV + IF-2 output
- Separated amplification paths for TV, IF-1 and IF-2 signals, each including attenuation and equalization adjustment potentiometers.
- GaAs-MESFET technology used for terrestrial amplification.
- External 75Ω output test ports.
- Zinc alloy housing with protective cover for adjustment potentiometers. F type connection. Wall-fixing.
- Indoor mounting. Grounding terminal.

| MODEL | | SAE-912 | | SAE-916 | |
|---|--|---------|---|--|--|
| REF. | | 3500 | | 3503 | |
| Powering mode | | Mains | | | |
| Bandwidth | Terrestrial (TV) Satellite (IF) Return | MHz | 45 - 862 950 - 2150 5 - 35 (passive path) | 86 - 862 950 - 2150 5 - 65 (active path) | |
| Terrestrial path (TV) | | | | | |
| Response flatness | | dB | ± 1.5 | | |
| Nominal gain | | dB | 35 | | |
| Variable interstage attenuator | | dB | 0 - 18 | | |
| Slope control range | | dB | 0 - 18 | | |
| Noise figure | | dB | ≤ 8 | | |
| Output level (DIN 45004B -60dB) | | dBμV | 118 | | |
| Output level (CTB, CSO -60dB, EN 42 ch) | | dBμV | 102 | | |
| Output test | | dB | -20 ± 1.5 | | |
| Satellite path (IF) | | | | | |
| Response flatness | | dB | ± 2 | | |
| Nominal gain | | dB | 40 | | |
| Variable interstage attenuator | | dB | 0 - 18 | | |
| Slope control range | | dB | 0 - 12 | | |
| Noise figure | | dB | ≤ 6 | | |
| Output level (EN 50083 -35dB) | | dBμV | 120 | | |
| Return path | | | | | |
| Nominal gain | | dB | -2.5 | 12 | |
| Selectable attenuation | | dB | — | 0 - 11 | |
| Max RF input level | | dBμV | — | 98 / 93 | |
| Noise figure | | dB | — | ≤ 7 | |
| Output level (DIN 45004B -60dB) | | dBμV | — | 110 | |
| General | | | | | |
| Mains supply voltage (50/60 Hz) | VAC | | 230 - 240 | 230 - 240 | |
| Consumption | W | | 8.5 | 9 | |
| Dimensions | mm | | 222 x 140 x 44 | | |

| MODEL | | SAE-920 | |
|---|--|-----------------------|--------------------------------------|
| REF. | | 3507 | |
| Powering mode | | Mains | |
| Bandwidth | Terrestrial (TV) Satellite (IF-1) Satellite (IF-2) | MHz | 45 - 862 950 - 2150 950 - 2150 |
| RF inputs | | 2 (TV+IF-1 ; IF-2) | |
| RF outputs | | 2 (TV+IF-1 ; TV+IF-2) | |
| Terrestrial path (TV) | | | |
| Response flatness | | dB | ± 1.5 |
| Nominal gain | | dB | 35 |
| Variable interstage attenuator | | dB | 0 - 18 |
| Slope control range | | dB | 0 - 18 |
| Noise figure | | dB | ≤ 8 |
| RF output level (DIN 45004B -60dB) | | dBμV | 118 |
| Output level (CTB, CSO -60dB, EN 42 ch) | | dBμV | 102 |
| Output test | | dB | -20 ± 1.5 |
| Satellite path | | | |
| Response flatness | | dB | ± 2 |
| Nominal gain | | dB | 40 |
| Variable interstage attenuator | | dB | 0 - 18 |
| Slope control range | | dB | 0 - 12 |
| Noise figure | | dB | ≤ 6 |
| RF output level (EN 50083 -35dB) | | dBμV | 120 |
| Output test | | dB | -20 ± 1.5 |
| General | | | |
| Operating temperature | | °C | -10 ... +55 |
| Mains supply voltage | | VAC | 230 - 240 |
| Consumption | | W | 15 |
| Dimensions | | mm | 222 x 140 x 44 |


Processing of analogue and digital terrestrial, satellite, cable and baseband signals. IPTV



- Resolving any type of installation
- Reliable and tough
- High compatibility between modules
- It allows pay-TV channels to be received
- Supports SD and HD channels
- Logical Numbering Function for LCN Channels

☐ A solution combining reception, modulation, security and ease of use and allows to manage any type of TV/video signal.

Installation example

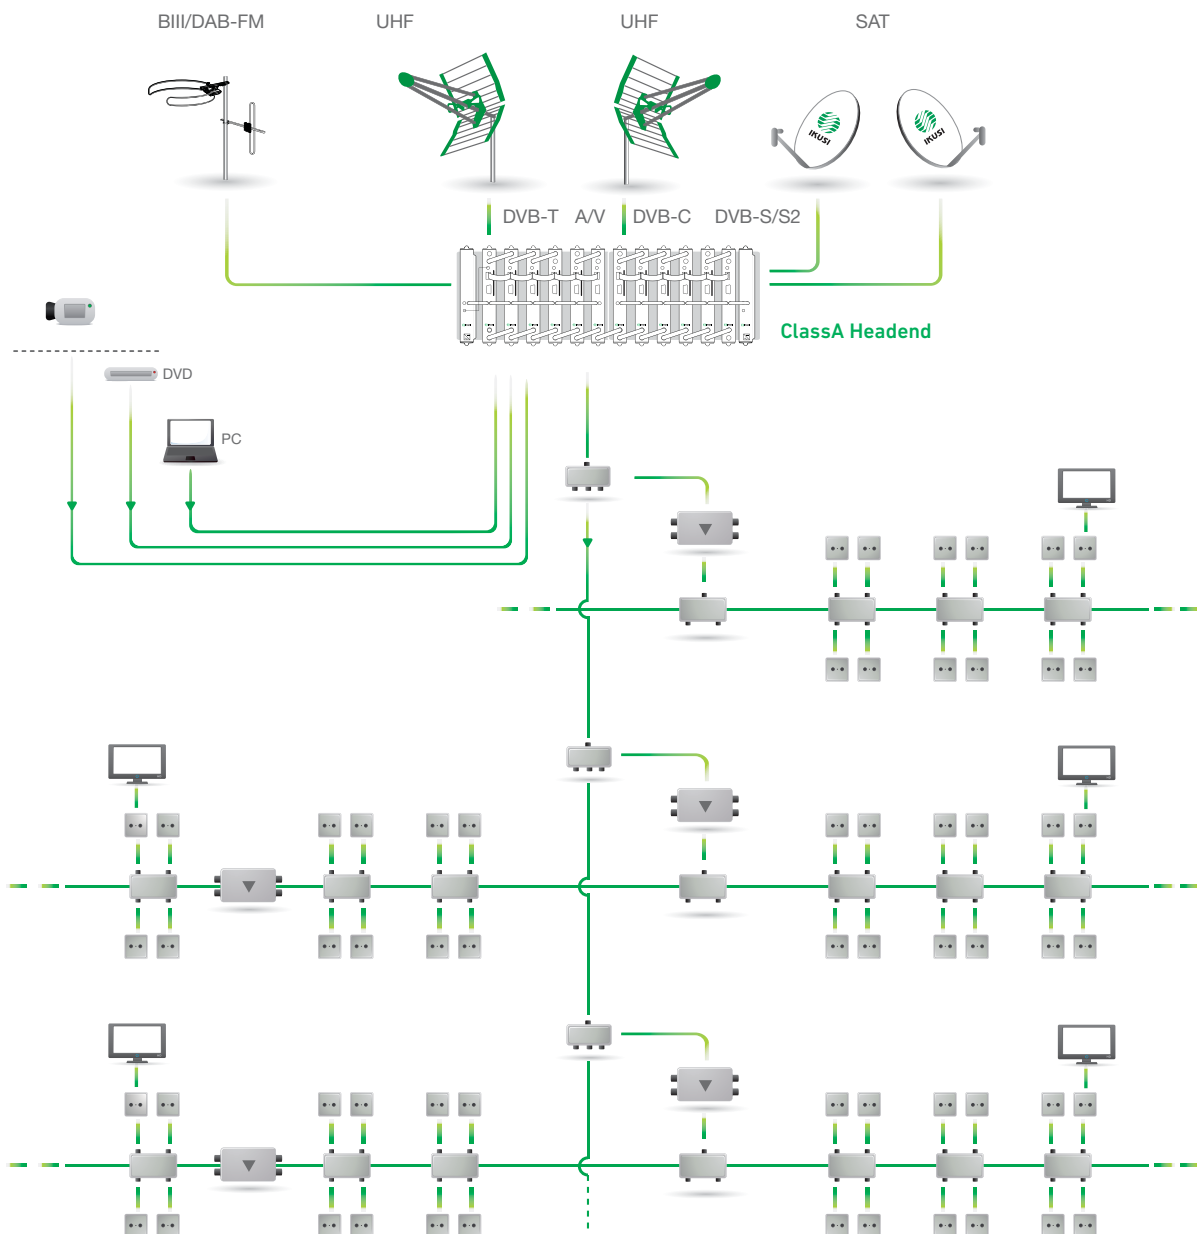

DVB-T output

DVB-S/S2 ▶ DVB-T transmodulator



MTI-900

MTI-800

- **Digital transmodulation (DVB-S/S2 to DVB-T) with Transport Stream Processing.** The DVB-S/S2 channels located in the Sat-IF frequency band (950-2150 MHz) are transformed to DVB-T channels located in the 47-862 MHz band. Range includes two transmodulators: MTI-900 and MTI-800. The MTI-900 has Common Interface (EN 50221) for discretionary de-encrypting of TV programmes.

A MTI headend includes:

- As many MTI transmodulators as COFDM channels to be distributed. At MTI-900 module, one CAM (Conditional Access Module) containing the Operator's Smart Card must fit the front panel slot.
- One HPA that amplifies the sum of the output DVB-T channels from the transmodulators.
- One or more CFP Power Supplies.
- One or more Rack-Frames or wall-fixing Base-Plates. The base-plates can be joined horizontally.
- Usually, housing units for the base-plates.
- If the headend is large, one or more AMX-400 combiners.

The MTI headends provide a DVB-T multichannel signal whose level is appropriate to feed the distribution network. An extension input at the HPA amplifier allows easy coupling of the wideband 47-862 MHz signal provided by another existing headend. You can use your TV DTT (Digital Terrestrial Television) for programs receiving satellite channels treated at the station MTI.

| MODEL | MTI-900 | | MTI-800 | |
|--|------------------------------------|---|---------|--|
| REF. | 4098 | | 4099 | |
| Reception | DVB-S (QPSK) DVB-S2 (QPSK/8PSK) | | | |
| Transport Stream (TS) processing | Yes | | | |
| Common interface slot (EN 50221) | Yes | | NO | |
| Number of encrypted programmes being supported | Variable (depends on the CAM) | | — | |
| DVB-S/S2 Input section | | | | |
| Standard | EN 300 421 | | | |
| Input frequency | MHz | 950 - 2150 | | |
| Input level | dBµV | 44 ... 84 (DVB-S) 39 ... 84 (DVB-S2) | | |
| Input loop-through gain | dB | 0 (±1) | | |
| AFC pull-in range | MHz | ±5 | | |
| Input Symbol rate | MS/s | 2 ... 45 (DVB-S) 10 ... 30 (DVB-S2) | | |
| COFDM Re-modulation section | | | | |
| Data processing | EN 300 744 | | | |
| Output operation modes | 2K .. 4K (DVB-H) .. 8K | | | |
| Constellation | QPSK .. 16QAM .. 64QAM | | | |
| Code rate | 1/2 .. 2/3 .. 3/4 .. 5/6 .. 7/8 | | | |
| Guard interval | 1/4 .. 1/8 .. 1/16 .. 1/32 | | | |
| MER (Modulation Error Ratio) | dB | > 38 (typ.) | | |
| COFDM Output section | | | | |
| Selectable output channel located between: | MHz | 47 - 862 | | |
| Bandwidth | MHz | 5 (DVB-H) .. 6 .. 7 .. 8 | | |
| Adjustable output level | dBµV | 65 to 80 | | |
| Frequency stability | ppm | ≤ ±30 | | |
| Output loop-through loss | dB | 1.1 | | |
| Spurious in band | dBc | < -50 | | |
| Broadband noise (ΔB=5 MHz) | dBc | < -75 | | |
| General | | | | |
| Supply voltage | VDC | +12 | | |
| Consumption | mA | 730 (without CAM) 870 (with CAM) | 730 | |
| Operating temperature | °C | 0 ... +45 | | |
| Input RF connector type | (2x) female F | | | |
| Output RF connector type | (2x) female F | | | |
| DC connector type | banana socket | | | |
| CAM entrance | 1 slot (EN 50221) | | — | |
| Programming interface | RS-232 / DB-9 | | | |
| IKUSUP bus connector | (2x) 4 pin socket | | | |
| Dimensions | mm | 230 x 195 x 32 | | |

DVB-T/DVB-C and IP output A/V ► DVB-T ; DVB-C modulators



MHD-201

MHD-202

- The MHD-201 is a module designed and manufactured completely with in-house technology, that is able to treat different video and audio formats, to create a high-definition output channel in DVB-T/C and in IP which can be active simultaneously.
- The unit has various types of inputs:
Two analogue audio and video channels, through RCA connectors.
One digital audio and video channel in HDMI, through an HDMI connection.
One digital audio and video channel in HD-SDI, through a BNC connector.
- High definition RF output channel in DVB-T/C and in IP which can be active simultaneously.
- This product solution fulfils the needs of video signal distribution in residential facilities, hospitals, hotels and unique buildings and also CCTV integration in existing installations. The MHD-201 has also an USB interface for HD video contents playback from a USB memory automatically.
- The MHD-202 is a module designed in-house and manufactured with our own technology, capable of modulating two HD audio and video sources to make up one or two high definition RF output channels (in accordance with the input bitrate) in DVB-T/C and in IP which can be active simultaneously.
- The unit is fitted with two HDMI digital audio and video inputs through HDMI connectors.
- The output stage is capable of generating two RF channels, one for each HDMI input.
- Moreover, the MHD-202 has a USB interface for automatic playback of SD and HD content from a pendrive.
- This function allows applications such as:
 - use in digital signage,
 - creation of an information channel,
 - integration of any video source in the existing TV network.
- The modulator is programmed by the end user using a local or remote web interface through an RJ-45 connector.
- This modulator is compatible with the application for PC: "IKUSI HEADEND DISCOVERY"

| MODEL | MHD-201 | | MHD-202 | |
|----------------------------|---|--|-----------|--|
| REF. | 3854 | | 3855 | |
| Inputs | (2x) CVBS, HDMI, HD-SDI | | (2x) HDMI | |
| Input level (CVBS) | Vpp | 0,7 - 1,4 | — | |
| Video standard | PAL/SECAM/NTSC/B&W | | — | |
| Audio standard | 1 (Mono and Stereo) | | — | |
| Video compression | MPEG2 MP@ML, H.264/MPEG4 AVC MP L4.1 | | | |
| Audio compression | MPEG1 layer II | | | |
| Video quality | SD, HD (480i, 576i, 480P, 576P, 720p50, 720p, 1080i50, 1080i60, 1080p50, 1080p60) | | | |
| Maximum resolution | 1080p60 | | | |
| DVB-T / DVB-C outputs | | DVB-T in accordance with ETSI EN 300 744 DVB-C in accordance with ETSI EN 300 429 | | |
| Bandwidth | MHz | 6 / 7 / 8 | | |
| Number of carriers | | 2K / 8K | | |
| MER | dB | ≥ 40 | | |
| Central frequency | MHz | 45 - 858 | | |
| Output level | dBµV | ≥ 80 | | |
| Output attenuation | dB | 0,5 | | |
| Level adjustment | dB | -25 | | |
| Frequency stability | ppm | ≤±30 | | |
| Noise figure (ΔB = 8 MHz) | dBc | ≤-65 | | |
| Loophrough frequency | | 45 MHz to 2,5 GHz | | |
| DVB-C output symbol rate | Kbps | 3000 - 8000 | | |
| Constellation | | DVB-T: 16QAM, 64QAM DVB-C: 16QAM, 32QAM, 64QAM, 128QAM, 256QAM | | |
| IP output | | IEEE 802.3 10/100 Base T | | |
| IP encapsulated type | | According to ETSI TS 102 034 v1.31(2007-10) and SMPTE ST 2022-2:2007 | | |
| Outflow IP | | CBR/VBR | | |
| IP Address | | Unicast/Multicast | | |
| Protocols | | UDP/RTP | | |
| IP encapsulated format | | SPTS | | |
| DVB processing | | PAT, PMT, SDT, NIT | | |
| NIT and SDT adaptation | | Yes | | |
| PSI/SI adaptation | | PAT, PMT, SDT, NIT | | |
| TS monitoring | | Yes | | |
| Network configuration | | NID, ONID, TSID, Network name, Provider | | |
| SID configuration | | Yes | | |
| LCN, TDT, TOT processing | | Yes | | |
| Channel name edition (EIT) | | Yes (ex. "camera pool") | | |
| Event description (EIT) | | Yes (ex. "open from 9am to 18pm") | | |
| Supply voltage | VDC | +12 | | |
| Firmware upgrade | | web interface | | |
| Playback from a USB | | Yes | | |
| Consumption | A | 1.3 | 1.9 | |
| Dimensions | mm | 230 x 195 x 32 | | |

DVB-T output Terrestrial/cable TV channel processor



- Double conversion in the 45-862 MHz frequency range. IF SAW filtering.
- Agile Processing module, usable either as channel converters (output channel is different to input channel) or as channel processor (output channel is the same as input channel). Adjacent channel operation at input and output.
- A TPC headend includes:
 - As many TPC processing modules as channels to be converted or processed.
 - One HPA amplifier that amplifies the sum of the combined output TV channels from the processors.
 - One or more CFP power supplies.
 - One or more rack-frames or wall fixing base plates. The base plates can be joined horizontally.
 - Usually, housing units for the base plates.
 - If the headend is voluminous, one or more AMX-400 combiners.

The TPC headends provide a TV multichannel signal whose level is appropriate to feed the distribution network. An extension input at the HPA amplifier allows easy coupling of the wideband 47-862 MHz signal provided by another existing headend.

| MODEL | | TPC-010 |
|---|--------|--|
| REF. | | 3842 |
| Type of application channel | | Digital |
| TV System / Standard | | DVB-T ,, DVB-C ,, B/G, D/K, I, L |
| Frequency band of input TV channel | MHz | 45 - 862 |
| Frequency selection steps | MHz | 0.500 |
| Input level (CAG 40 dB ; manual adjustment for L-system channels) | dBµV | 40 - 80 |
| Selectable tuning offset | kHz | (±) 125 / 250 / 375 / 500 |
| Noise figure | dB | < 9 (input level <70 dBµV) |
| Bandwidth of SAW filtering (at -3 dB) | MHz | 6.875 (for 7 MHz channels) 7.850 (for 8 MHz channels) |
| Selectivity for 7 MHz channels | dB | > 9 (fc ± 3.75 MHz) > 70 (fc ± 4.75 MHz) |
| Selectivity for 8 MHz channels | dB | > 18 (fc ± 4.75 MHz) > 70 (fc ± 5.25 MHz) |
| Image rejection | dB | > 70 |
| Adjustable output level | dBµV | 55 to 70 |
| Output loop-through loss | dB | 1.1 (typ) .. 1.4 (max) |
| Group delay | ns | < ±40 |
| Spurious in band | dBc | < -58 |
| Phase noise of output channel (@ 1kHz) | dBc/Hz | < -92 (processor) < -80 (converter) |
| Broadband noise (ΔB=5 MHz) | dBc | < -75 |
| Supply voltage | VDC | +12 |
| Consumption | mA | 540 |
| Operating temperature | °C | 0 ... +45 |
| Input RF connector type | | (1x) female F |
| Output RF connector type | | (2x) female F |
| DC connector type | | "banana" socket |
| Programming interface | | RS-232 / DB-9 |
| Dimensions | mm | 230 x 195 x 32 |

DVB-T output

DVB-T ► DVB-T transmodulator



- The TGT is a DVB-T to DVB-T Transport Stream Regenerator/Processor.
- The product is designed to correct and rebuild a poor quality COFDM signal back to Quasi Transmission Standard. The product also allows the user to change various parameters of the regenerated COFDM stream at the output.
- A TGT headend includes:
 - As many TGT Regenerators as COFDM channels being received.
 - One or more AMX-400 combiners if the headend being assembled is extensive.
 - One HPA Amplifier to launch the combined output COFDM channels from the regenerators.
 - One or more CFP Power Supplies.
 - One or more Rack Frames or wall mounting Base Plates. The base plates can be joined horizontally.
 - Housing units for the base plates if required.
 - If the headend is large, one or more AMX-400 combiners.

The TGT headends deliver a multichannel COFDM signal with sufficient power to drive a distribution network.

An extension input at the HPA amplifier allows easy coupling of the wideband 47-862 MHz signal provided by other existing headend equipment.

| MODEL | | TGT-100 |
|--|------|---------------------------------|
| REF. | | 4026 |
| Remote mode | | Yes |
| Transport Stream (TS) processing | | Yes |
| Input section (COFDM) | | |
| Standard | | EN 300 744 |
| Input frequency band | MHz | 174 - 230 and 470 - 862 |
| Bandwidth | MHz | 7 .. 8 |
| Mode (automatic detection) | | 2K .. 8K |
| Constellation | | QPSK .. 16QAM .. 64QAM |
| Hierarchy | | High Priority .. Low Priority |
| Input level (contellation: 64QAM/code rate: 2/3) | dBµV | 35 ... 100 |
| Input loop-through gain | dB | 0.5 (±1) |
| Guard interval (automatic detection) | | 1/4 .. 1/8 .. 1/16 .. 1/32 |
| COFDM Re-modulation section | | |
| Data processing | | 2K .. 4K (DVB-H) .. 8K |
| Constellation | | QPSK .. 16QAM .. 64QAM |
| Code rate | | 1/2 .. 2/3 .. 3/4 .. 5/6 .. 7/8 |
| Guard interval (automatic detection) | | 1/4 .. 1/8 .. 1/16 .. 1/32 |
| In-depth interleaving (only on DVB-H) | | Applicable (on 2K and 4K modes) |
| MER | dB | > 38 (typ.) |
| Output section (COFDM) | | |
| Selectable output channel located between: | MHz | 47 - 862 |
| Bandwidth | MHz | 5 (DVB-H) .. 6 .. 7 .. 8 |
| Adjustable output level | dBµV | 65 to 80 |
| Frequency stability | ppm | ±30 |
| Output loop-through loss | dB | 1.1 |
| Spurious in band | dBc | < -50 |
| Broadband noise (ΔB=8MHz) | dBc | < -75 |
| General | | |
| Supply voltage | VDC | +12 |
| Consumption | mA | 670 |
| Operating temperature | °C | 0 ... +45 |
| Input RF connector type | | (2x) female F |
| Output RF connector type | | (2x) female F |
| DC connector type | | "banana" socket |
| Programming interface | | RS-232 / DB-9 |
| IKUSUP bus connector | | (2x) 4 pin socket |
| Dimensions | mm | 230 x 195 x 32 |

AM output DVB-S ► AM transmodulator



- Reception of encrypted Sat-TV programs. Standard DVB-S / MPEG-2 (EN 300 421).
- Receiving Modules with Common Interface (EN 50221). The encrypted TV programmes transmitted on QPSK channels are de-encrypted and presented on conventional VHF/UHF channels (any TV system or Colour system).
- An SRC headend includes:
 - As many SRC Receiving Modules as de-encrypted TV programmes to be distributed. At each module, one CAM (Conditional Access Module) containing the Operator's Smart Card must fit the front panel slot.
 - One HPA Amplifier that amplifies the sum of the receivers' output TV channels. One or more CFP Power Supplies.
 - One or more Rack-Frames or wall-fixing Base-Plates. The base-plates can be joined horizontally.
 - Usually, housing units for the base-plates.
 - If the headend is large, one or more AMX-400 combiners.

The SRC headends provide a TV multichannel signal whose level is appropriate to feed the distribution network. With an SRC installed in the headend, the end user does not require a Set Top Box or any additional devices to view the de-encrypted digital TV programs being distributed. An extension input at the HPA amplifier allows easy coupling of the wideband 47-862 MHz signal provided by another existing headend.

An SRC receiving module with CAM+Operator's smart card inserted, carries out a complete channel processing from the input to the input:

- tunes a DVB-S Sat-IF digital channel in the 950-2150 MHz band,
- selects an encrypted TV programme from the multiplex being received, and
- de-encrypts and presents it on a conventional TV channel that is selectable throughout the 45-862 MHz.

| MODEL | | SRC-111 |
|--|------|--|
| REF. | | 4096 |
| Output TV-channel spectrum | | VSF (Vestigial Side Band) |
| Remote mode | | Yes |
| Output channel TV system | | B / G |
| Audio operation mode | | Mono ⁽¹⁾ |
| Output channel colour system | | PAL , SECAM , NTSC |
| Selectable output channel located between: | MHz | 45 - 862 |
| Input section (QPSK) | | |
| Inpt frequency | MHz | 950 - 2150 |
| Input level | dBµV | 44 ... 84 |
| Input loop-through gain | dB | 0 (±1) |
| AFC pull-in range | MHz | ±5 |
| Input symbol rate | MS/s | 2 ... 45 |
| MPEG-2 decoding | | |
| Video decoding | | Main Profile @ Main level |
| Audio decoding | | Layer II |
| Teletext - subtitles insertion | | Yes |
| Image format conversion | | 16:9 a 4:3 Pan&Scan and 16:9 a 4:3 Letter-box |
| External V/A loop | | |
| Video and L/R audio output levels | Vpp | 1.0 (video) 0 ... 2.0 (audio) |
| Video and L/R audio input levels | Vpp | 0.9 ... 1.1 (video) 0.5 ... 1.0 (audio) |
| V & A re-modulation section | | |
| Adjustable video modulation depth | % | 80 to 90 |
| Adjustable audio peak deviation | kHz | ±10 to ±50 |
| Output section (TV channel) | | |
| Adjustable output level | dBµV | 65 to 80 |
| Output loop-through loss | dB | 1.1 |
| Adjustable carrier level ratio | dB | 12 / 16 |
| Group delay precorrection | | Yes |
| Weighted SNR | dB | > 60 |
| Spurious in band | dBc | < -60 |
| Broadband noise (ΔB=5 MHz) | dBc | < -75 |
| General | | |
| Supply voltage | VDC | +12 |
| Max consumption (CAM included) | mA | 680 |
| Operating temperature | °C | 0 ... +45 |
| Input RF connector type | | (2x) female F |
| Output RF connector type | | (2x) female F |
| DC connector type | | banana socket |
| CAM entrance | | Slot |
| Programming interface | | RS-232 / DB-9 |
| Video/audio loop connector type | | mini-DIN (6-way) |
| IKUSUP bus connector | | (2x) 4-pin socket |
| Dimensions | mm | 230 x 195 x 32 |

AM output DVB-S ▶ AM transmodulator



- Terrestrial TV reception, standard DVB-S / MPEG-2 (EN 300 421).
- Digital-to-Analogue Transmodulation Process (QPSK - AM) that presents the clear TV programmes transmitted in QPSK Sat-TV channels on conventional VHF/UHF channels (VSB vestigial side band; any TV system and Colour system).
- An SRF headend includes:
 - As many SRF receiving modules as free-to-air TV programmes to be distributed.
 - One HPA amplifier that amplifies the sum of the combined output TV channels from the receivers.
 - One or more CFP power supply.
 - One or more rack-frames or wall fixing base plates. The base plates can be joined horizontally.
 - Usually, one housing unit.
 - If the headend is voluminous, one or more AMX-400 combiners.

The SRF headends provide a TV multichannel signal whose level is appropriate to feed the distribution network. With a SRF installed in the headend, the end user does not require a Set Top Box or any additional devices to view the clear digital TV programs being distributed. An extension input at the HPA amplifier allows easy coupling of the wideband 47-862 MHz signal provided by another existing headend.

A SRF receiving module carries out the complete channel processing from the input to the output:

- tunes a QPSK Sat-IF digital channel in the 950-2150 MHz band,
- selects a TV programme from the multiplex received, and
- directs it to a conventional TV channel which is selectable throughout the 45-862 MHz band.

Range includes different models for VSB output channel spectrums; for B/G, D/K, I, L or M/N TV system; and for mono or A2 stereo/dual sounds.

| MODEL | | SRF-011 |
|--|--------------|--|
| REF. | | 4084 |
| Output TV-channel spectrum | | VSB (Vestigial Side Band) |
| Remote mode | | NO |
| Output channel TV system | | B / G / D / K / I / L |
| Output channel audio system | | Mono |
| Output channel colour system | | PAL , SECAM , NTSC |
| Selectable output channel located between: | MHz | 45 - 862 |
| Input section (DVB-S) | | |
| Input frequency band | MHz | 950 - 2150 |
| Input level | dB μ V | 44 ... 84 |
| Input loop-through gain | dB | 0 (\pm 1) |
| AFC pull-in range | MHz | \pm 5 |
| Input symbol rate | MS/s | 2 ... 45 |
| MPEG-2 decoding section | | |
| Video decoding | | Main Profile @ Main Level |
| Audio decoding | | Layer II |
| Teletex - Subtitles insertion | | Yes |
| Image Format Conversion | | 16:9 to 4:3 Pan&Scan and 16:9 to 4:3 Letter-box |
| V/A re-modulation section | | |
| Adjustable video modulation depth | % | 80 to 90 |
| Adjustable audio peak deviation | kHz | \pm 10 to \pm 50 |
| Output section (TV channel) | | |
| Adjustable output level | dB μ V | 65 to 80 |
| Output loop-through loss | dB | 1.1 |
| Adjustable carrier level ratio | dB | 12 / 16 (Mono ; A2: Audio1) 20 (A2: Audio2) |
| Weighted SNR | dB | > 60 |
| Spurious in band | dBc | < -58 |
| Broadband noise (Δ B=5 MHz) | dBc | < -75 |
| General | | |
| Supply voltage | VDC | +12 |
| Consumption | mA | 540 |
| Operating temperature | $^{\circ}$ C | 0 ... +45 |
| Input RF connector type | | (2x) female F |
| Output RF connector type | | (2x) female F |
| DC connector type | | banana socket |
| Programming interface | | RS-232 / DB-9 |
| Dimensions | mm | 230 x 195 x 32 |

AM output

A/V ▶ AM Twin modulators



MCP-801



MCP-811

- Vestigial side band twin modulators.
- The twin ones integrate two modulators in one module.
- IF modulation and SAW filtering for maximum harmonic reduction and true VSB response. Adjacent channel operation.
- Frequency agility. Any selectable TV channel within the 45-862 MHz band. PLL frequency synthesized.
- Built-in test pattern generator.
- In twin modulators, the two generated TV channels are combined internally to make up one bi-channel output signal.

| MODEL | | MCP-801 | MCP-811 |
|--|-------------|---|---------|
| REF. | | 3849 | 3851 |
| TV system | | B/G/D/K/I/L | B / G |
| Audio system | | Mono | |
| Input | | (2x) Video .. (2x) Audio | |
| Selectable output channel located between: | MHz | TV Bi-channel each one of the two channels is selectable between: 45 - 862 | |
| Adjustable output level | dBuV | 68 to 78 | |
| Intercarrier frequency | Audio 1 MHz | 5.5 | |
| Adjustable carrier level ratio | dB | 12 / 16 | |
| Video input level | Vpp | 0.7 ... 1.4 | |
| Video input impedance | Ω | 75 | |
| Adjustable video modulation depth | % | 80 to 90 | |
| Audio input level | Vpp | 0.5 ... 4.0 | |
| Audio input impedance | Ω | > 600 | |
| Adjustable audio peak deviation | kHz | ±40 to ±50 | |
| Audio pre-emphasis | μs | 50 | |
| Weighted SNR | dB | > 59 | |
| Differential gain | % | < 3 | |
| Differentian phase | ° | < 3 | |
| K-factor (2T pulse) | % | < 3 | < 2.5 |
| Spurious in band | dBc | < -57 | |
| Broadband noise (ΔB=5 MHz) | dBc | < -73 | |
| Output loop-through loss | dB | 0.7 (typ) .. 1.2 (max) | |
| Supply voltage | VDC | +12 | |
| Consumption | mA | 460 | |
| Video connector type | | (2x) female RCA | |
| Audio connector type | | (4x) female RCA | |
| Output RF connector type | | (2x) female F | |
| DC connector type | | banana socket | |
| Programming interface | | RS-232 / DB-9 | |
| Dimensions | mm | 230 x 195 x 32 | |

IF-IF converter

Processes 3 frequencies DVB-S/S2



SPC-030

| MODEL | | SPC-030 |
|--|--------------|--|
| REF. | | 3844 |
| Number of SAT-IF channels converted | | 3 |
| Input mode | | Configurable: a) Loop-through b) Two independent inputs: port up : 2-channel input port down : 1-channel input |
| Input section | | |
| Input frequency | MHz | 950 - 2150 |
| Input level | dB μ V | -60 ... -20 |
| Input symbol rate | dB | 6 ... 45 |
| Max level difference between input signals | | 25 |
| Noise figure | | < 10 |
| Input loop-through gain | | 0 (\pm 2) |
| Output section | | |
| Output frequency band | MHz | 950 - 2150 |
| Output response flatness | MHz | < 3 |
| Adjustable output level | dB μ V | -38 to -23 |
| Phase noise | ppm | DVB-S2 compatible |
| Output loop-through loss | dB | 1 (typ.) .. 1.8 (max) |
| Spurious in band | dBc | < -35 |
| General | | |
| Supply voltage | VDC | +12 |
| Consumption | mA | 210 |
| Operating temperature | $^{\circ}$ C | 0 ... +45 |
| Input RF connector type | | (2x) female F |
| Output RF connector type | | (2x) female F |
| DC connector | | banana socket |
| Programming interface | | RS-232 / DB-9 |
| Dimensions | mm | 230 x 195 x 32 |

- Frequency conversion of Sat-IF channels coming from different satellites or polarizations in order to establish a new frequency plan where all the converted channels are transmitted on a single cable.
- Use with digital channels.
- Triple Converter. Conversion of three channels.
- Input mode configurable:
 - a) Loop-through, which facilitates interconnection of several modules to convert many channels transported by a down-lead cable.
 - b) Two independent inputs, for converting one channel transported by a down-lead cable and two channels transported by another.

DVB-C output DVB-S/S2 ► DVB-C transmodulator



- **Digital Transmodulation (DVB-S/S2 to DVB-C).**

The DVB-S/S2 channels located in the Sat-IF frequency band (950-2150 MHz) are transformed to DVB-C channels (16 to 256 symbols) located in the 45-862 MHz band.

- A MDI headend includes:
 - As many MDI Transmodulators as QAM channels to be distributed.
 - One HPA Amplifier that amplifies the sum of the combined output QAM channels from the transmodulators.
 - One or more CFP Power Supplies.
 - One or more Rack-Frames or wall-fixing Base-Plates. The base-plates can be joined horizontally.
 - Usually, housing units for the base-plates.
 - If the headend is large, one or more AMX-400 combiners.

The MDI headend provide a QAM multichannel signal whose level is appropriate to feed the distribution network. An extension input at the HPA amplifier allows easy coupling of the wideband 47-862 MHz signal provided by another existing headend. The user requires a DVB-C Receiver to convert the QAM signals into the appropriate signals that can be accepted by a conventional TV set, and to control access to encrypted TV programmes.

| MODEL | | MDI-910 |
|--|------|--|
| REF. | | 4020 |
| Reception | | DVB-S2 DVB-S |
| Transport Stream processing | | Yes |
| Common Interface (EN 50221) | | Yes |
| Input section (DVB-S/S2) | | |
| Standard | | EN 302 307 |
| Input frequency band | MHz | 950 - 2150 |
| Input level | dBµV | 44 ... 84 (DVB-S) 39... 84 (DVB-S2) |
| Input loop-through gain | dB | 0 (±1) |
| AFC pull-in range | MHz | ±5 |
| Input symbol rate | MS/s | 10 ... 30 (DVB-S2) 2 ... 45 (DVB-S) |
| Re-modulation section (DVB-C) | | |
| Data processing | | EN 300 744 |
| Selectable modulation scheme | | 16QAM ,, 32QAM ,, 64QAM ,, 128QAM ,, 256QAM |
| MER (Modulation Error Ratio) | dB | > 40 (typ.) |
| Output symbol ratio | MS/s | 1 ... 8 |
| Selectable Roll-Off factor | % | 12 ,, 13 ,, 15 |
| Output section (DVB-C) | | |
| Selectable output channel located between: | MHz | 47 - 862 |
| Bandwidth | MHz | 5 (DVB-H) ,, 6 ,, 7 ,, 8 |
| Adjustable output level | dBµV | 65 to 80 |
| Output loop-through loss | dB | 1.1 |
| Spurious in band | dBc | < -55 |
| Broadband noise (ΔB=5 MHz) | dBc | < -75 |
| General | | |
| Supply voltage | VDC | +12 |
| Consumption | mA | 710 (without CAM) 850 (with CAM) |
| Operating temperature | °C | 0 ... +45 |
| DC connector type | | banana socket |
| CAM entrance | | slot |
| Programming Interface | | RS-232 / DB-9 |
| IKUSUP bus connector | | (2x) 4-pin socket |
| Dimensions | mm | 230 x 195 x 32 |

DVB-C output

DVB-T ► DVB-C transmodulator



| MODEL | | TDI-900 |
|---|------|---|
| REF. | | 4021 |
| Remote mode | | Yes |
| Transport Stream (TS) processing | | Yes |
| Input section (DVB-T) | | |
| Standard | | EN 300 744 |
| Input frequency | MHz | 174 - 230 and 470 - 862 |
| Bandwidth | MHz | 7 .. 8 |
| Mode (automatic detection) | | 2K .. 8K |
| Constellation (automatic detection) | | QPSK .. 16QAM .. 64QAM |
| Hierarchy | | High Priority .. Low Priority |
| Input level | dBµV | 35 ... 100 |
| Input loop-through gain | dB | 0.5 (±1) |
| Guard interval (automatic detection) | | 1/4 .. 1/8 .. 1/16 .. 1/32 |
| Re-modulation section (DVB-C) | | |
| Data processing | | EN 300 429 |
| Selectable Modulation Scheme of output signal | | 16QAM .. 32QAM .. 64QAM .. 128QAM .. 256QAM |
| MER (Modulation Error Ratio) | dB | > 40 (typ.) |
| Output symbol rate | MS/s | 1 ... 8 |
| Selectable Roll-Off factor | % | 12 .. 13 .. 15 |
| RF output section (DVB-C) | | |
| Selectable output channel located between: | MHz | 47 - 862 |
| Adjustable output level | dBµV | 65 to 80 |
| Output loop-through loss | dB | 1.1 |
| Spurious in band | dBc | < -55 |
| Broadband noise (ΔB=5 MHz) | dBc | < -75 |
| General | | |
| Supply voltage | VDC | +12 |
| Consumption | mA | 650 |
| Operating temperature | °C | 0 ... +45 |
| Input RF connector type | | (2x) female F |
| Output RF connector type | | (2x) female F |
| DC connector type | | banana socket |
| Programming Interface | | RS-232 / DB-9 |
| IKUSUP bus connector | | (2x) 4-pin socket |
| Dimensions | mm | 230 x 195 x 32 |

• **Digital Transmodulation (DVB-T to DVB-C) with Transport Stream Processing.**
The DVB-T channels located in the 174-230 MHz or 470-862 MHz bands are transformed to DVB-C channels (16 to 256 symbols) located in the 47-862 MHz band. NIT table can be adapted to the new network created.

- A TDI headend includes:
 - As many TDI Transmodulators as QAM channels to be distributed.
 - One HPA Amplifier that amplifies the sum of the combined output QAM channels from the transmodulators.
 - One or more CFP Power Supplies.
 - One or more Rack-Frames or wall-fixing Base-Plates. The base-plates can be joined horizontally.
 - Usually, housing units for the base-plates.
 - If the headend is large, one or more AMX-400 combiners.


The TDI headends provide a QAM multichannel signal whose level is appropriate to feed the distribution network. An extension input at the HPA amplifier allows easy coupling of the wideband 47-862 MHz signal provided by another existing headend. The user requires a DVB-C Receiver to convert the QAM signals into the appropriate signals that can be accepted by a conventional TV set, and to control access to encrypted TV programmes.

ClassA modules with IKUNET communications bus that allow all the modules to be adjusted and controlled as a headend.



- It allows channels to be added/modified without having to retune the television sets
- Security of contents
- Universal input tuners: DVB-T/T2, DVB-S/S2, DVB-C
- MPEG4 to MPEG2 transcoding
- Easy-to-adjust headend using a Wizard application
- More channels in less space

Remote configuration through web interface

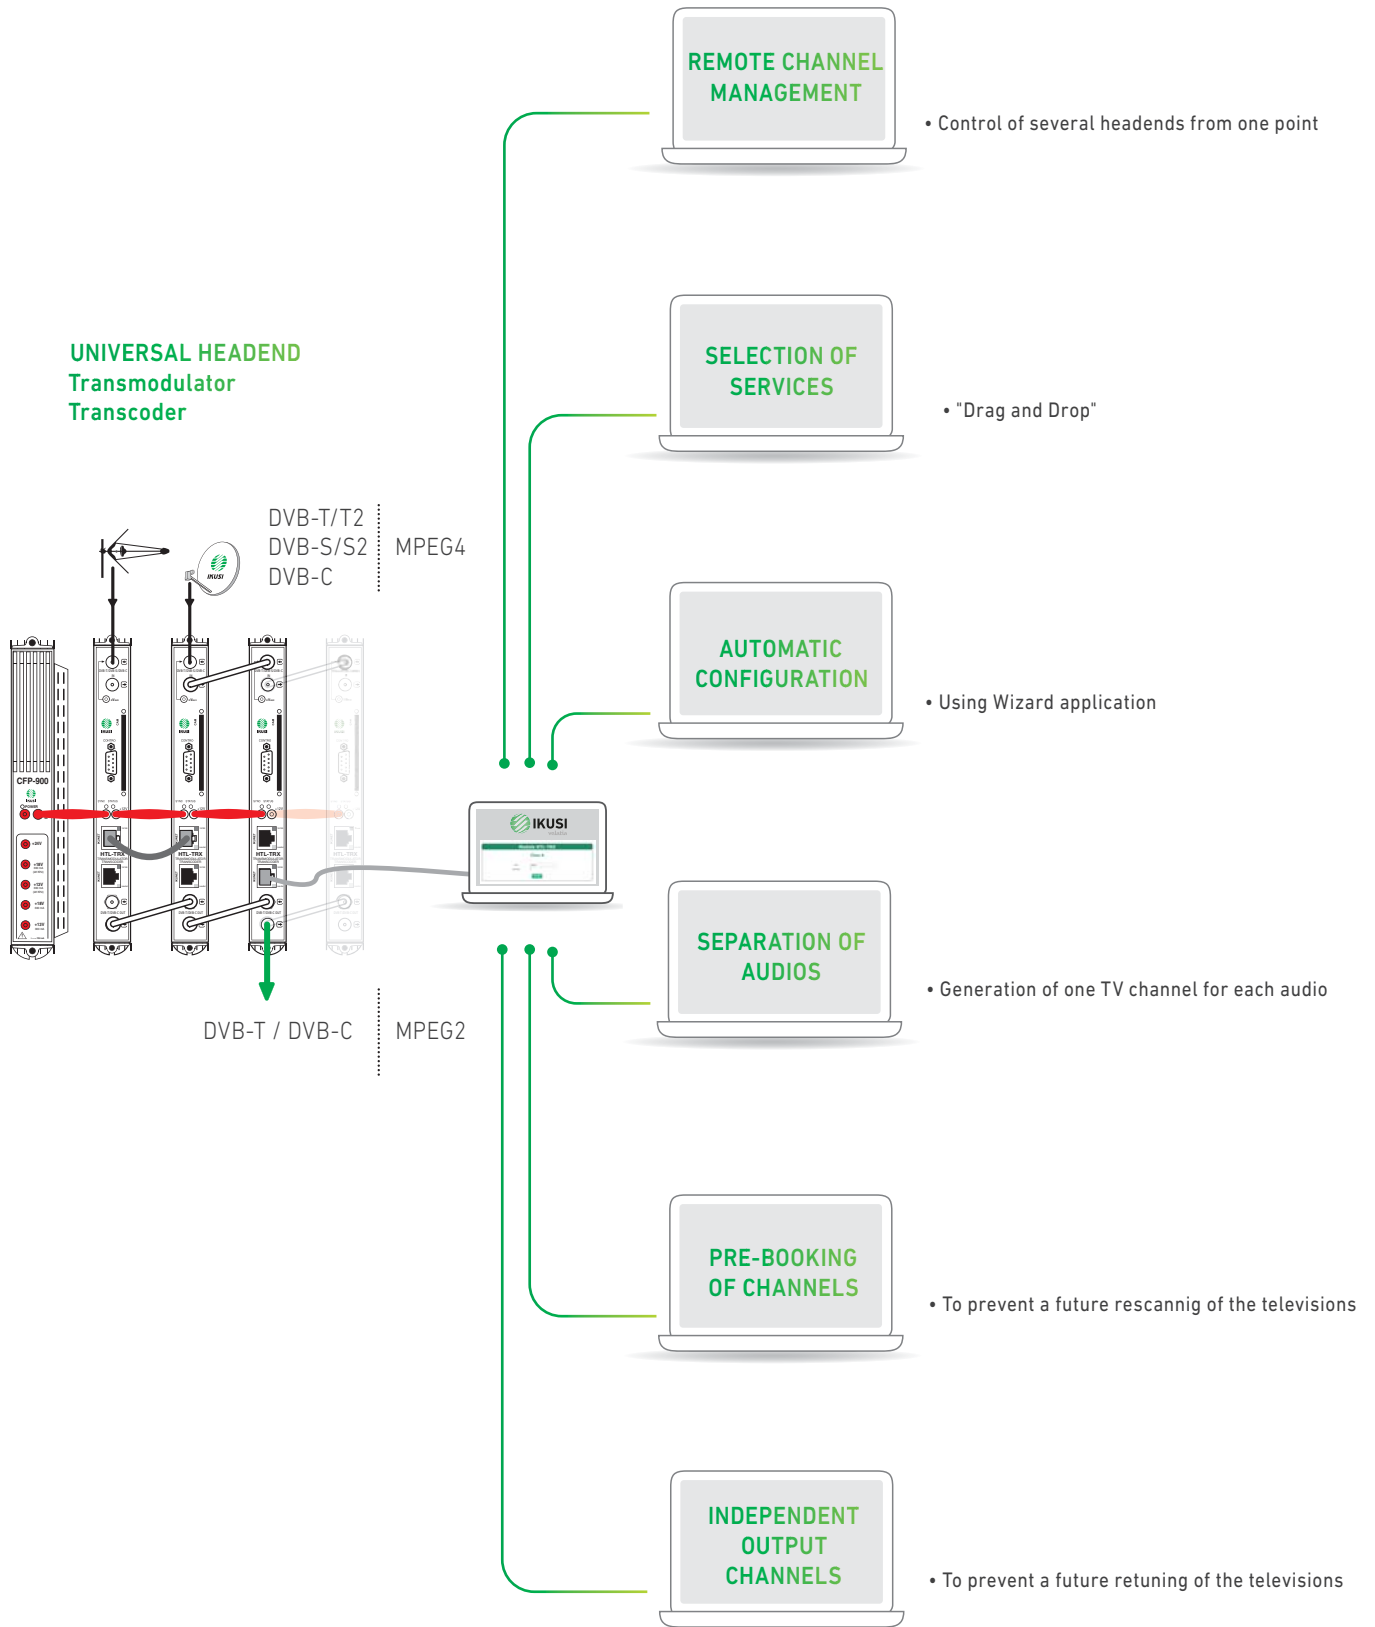

DVB-T and DVB-C output

Double transmodulator DVB-T/T2 ; DVB-S/S2 ; DVB-C ▶ DVB-T and DVB-C
MPEG4 ▶ MPEG2 transcoder



- **Transcoding of MPEG4 to MPEG2 input services.**
Versatile transmodulation of DVB-T/T2, DVB-S/S2 and DVB-C channels to DVB-T/DVB-C channels.
- The HTL-TRX module can receive 2 DVB-T/T2 or DVB-S/S2 or DVB-C muxes and combine them on 2 DVB-T or DVB-C output channels. It handles HD and SD services both on MPEG4 H.264 and on MPEG-2, allowing HD contents to be received on SD televisions.
- One module acts as the “master” to ensure the configuration (remote or local through PC) is carried out at the complete headend level, through the IKUNET bus and not module by module.
- It has a Common Interface (EN 50221) for discretionary decryption of programmes in accordance with the inserted CAM module.
- With Ikusi’s Transcoding solution, the old TV SD equipment does not need to be changed and the latest content can still be enjoyed. The Ikusi headend offers the chance of deciding when and how to up-date the television sets.
- It allows a future increase in channels to be foreseen in order for the televisions to have them already on their lists, avoiding the need for retuning.
- It allows a video service to be sent with several different languages without taking up more space than that corresponding to an RF channel. The television shows “a programme” for each language, avoiding the need for users to have to choose their “language” on the television remote control.
- It is compatible with the PC application: “IKUSI HEADEND DISCOVERY” (this can be downloaded from <http://areacliente.ikusi.tv>).
- It allows grids of channels to be created and managed remotely, ensuring that the grid is completely customisable without having to intervene in-situ.
- It allows multiple headends to be managed from a single point for efficient maintenance.
- The two COFDM channels can be distributed onto any part of the band.
- The Wizard installation assistant allows us to carry out a step-by-step headend configuration that is quick and easy. It is executed by turning slave into Master or entering from the general menu.
- Total control of the multiswitch. Fitted with DiSEqC

| MODEL | | HTL-TRX | |
|--|--------------------------|---|-------------------------------|
| REF. | | 3861 | |
| Inputs | | 2 (or loop through) | |
| Standards | | EN 300 744 DVB-T EN 302 755 DVB-T2 EN 300 421 DVB-S EN 302 307 DVB-S2 EN 300 744 DVB-C | |
| Reception | | DVB-T/T2 ; DVB-S/S2 ; DVB-C | |
| Frequency range | MHz | DVB-T: 47 - 862 DVB-S: 950 - 2150 DVB-C: 47 - 862 | |
| No. tuned programs | | -If transcoder activated, treatment capacity is limited to 4 channels and up to 8 audio streams. -If transcoder deactivated, treatment capacity is limited only by output bitrate. Typically up to 31 Mbps for DVB-T and up to 55 Mbps for DVB-C. -Transcoder does not treat subtitles HD to subtitle SD. | |
| Max n° of decrypted programmes | | Variable (depending on CAM) | |
| Input level | dBµV | 40 - 92 | |
| Input loop gain | dB | 0 (±1) | |
| Symbol rate | DVB-S DVB-S2 DVB-C | MS/s | 2 ... 45 2 ... 45 7 max |
| TS Processing | | | |
| PSI/SI adaptation | | Generating and inserting tables PAT, PMT, CAT, SDT, NIT, TOT and BAT | |
| NIT (Network Information Table) adaptation | | Yes (generated automatically) | |
| SDT (Service Description Table) adaptation | | Yes (configurable name input) | |
| Processing LCN, TDT, TOT | | Yes | |
| Transcoding | | | |
| Supported usecases | | 1080i mpeg4 > 576i mpeg2 576i mpeg4 > 576i mpeg2 | |
| Audio | | AC3 > mpeg I layer II AC3Plus > mpeg I layer II | |
| Outputs | | DVB-T in accordance with ETSI EN 300 744 DVB-C in accordance with ETSI EN 300 429 | |
| No. of outputs | | 2 DVB-T / DVB-C | |
| Output frequency | MHz | DVB-T: 47-862 ; DVB-C: 47-862 | |
| MER | dB | > 40 | |
| Output level | dBµV | 80 | |
| Adjustable output level | dB | -15 | |
| DVB-T modulation formats | | QPSK ; 16QAM ; 64QAM | |
| DVB-T code ratio | | 1/2 , 2/3 , 3/4 , 5/6 , 7/8 | |
| DVB-T guard interval | | 1/4 , 1/8 , 1/16 , 1/32 | |
| Bandwidth | MHz | 6 / 7 / 8 | |
| Loop step attenuation | dB | 1.1 | |
| DVB-C symbol rate | | 7.2 max | |
| Configuration | | PC. Web, Ikusi Headend Discovery, Wizard assistant | |
| Supply voltage | VDC | +12 | |
| Consumption | A | 2 | |
| Firmware upgrade | | Web interface | |
| Operating temperature | | 0 ... +45 | |
| CAM | | 1 slot (EN 50221) | |
| Bus IKUNET connector | | 2x RJ-45 | |
| Dimensions | | mm 230 x 195 x 32 | |

DVB-T and DVB-C output

Double transmodulator DVB-T/T2 ; DVB-S/S2 ; DVB-C ▶ DVB-T and DVB-C



- Versatile transmodulation of DVB-T/T2, DVB-S/S2 and DVB-C channels to DVB-T/DVB-C channels.
- The HTL-STC module can receive 2 DVB-T/T2, DVB-S/S2 or DVB-C muxes and combine them on 2 DVB-T or DVB-C output channels.
- One module acts as the "master" to ensure the configuration (remote or local through PC) is carried out at the complete headend level, through the IKUNET bus and not module by module.
- The Wizard installation assistant allows us to carry out a step-by-step headend configuration that is quick and easy.
- It has a Common Interface (EN 50221) for discretionary decryption of programmes in accordance with the inserted CAM module.
- It allows a future increase in services to be foreseen in order for the televisions to have them already on their lists, avoiding the need for retuning.
- It allows a video service to be sent with several different languages without taking up more space than that corresponding to an RF channel. The television shows "a programme" for each language, avoiding the need for users to have to choose their "language" on the television remote control.
- It is compatible with the PC application: "IKUSI HEADEND DISCOVERY" This instrument provides installers with a tool that allows them to detect the headend's modules without having to modify the PC's network configuration. (This can be downloaded from www.ikusi.tv).
- It allows grids of channels to be created and managed remotely, ensuring that the grid is completely customisable without having to intervene in-situ.
- The two DVB-T/C output channels can be distributed onto any part of the band.
- Total control of the multiswitch. Fitted with DiSeqC

| MODEL | | HTL-STC | |
|--|--|--|---|
| REF. | | 3860 | |
| Inputs | | 2 (or loop through) | |
| Standards | | EN 300 744 DVB-T EN 302 755 DVB-T2 EN 300 421 DVB-S EN 302 307 DVB-S2 EN 300 744 DVB-C | |
| Reception | | DVB-T /T2 ; DVB-S/S2 ; DVB-C | |
| Frequency range | | MHz | DVB-T: 47 - 862 DVB-S: 950 - 2150 DVB-C: 47 - 862 |
| Max n° of decrypted programmes | | Variable (depending on CAM) | |
| Input level | | dBµV | 40 - 92 |
| Input loop gain | | dB | 0 (±1) |
| Symbol rate | | DVB-S DVB-S2 DVB-C | MS/s 2 ... 45 2 ... 45 7 max |
| TS processing | | | |
| PSI/SI adaptation | | Generating and inserting tables PAT, PMT, CAT, SDT, NIT, TOT and BAT | |
| NIT (Network Information Table) adaptation | | Yes (generated automatically) | |
| SDT (Service Description Table) adaptation | | Yes (configurable name input) | |
| Processing LCN, TDT, TOT | | Yes | |
| Outputs | | DVB-T in accordance with ETSI EN 300 744 DVB-C in accordance with ETSI EN 300 429 | |
| No. of outputs | | 2 DVB-T / DVB-C | |
| Output frequency | | MHz | DVB-T: 47 - 862 DVB-C: 47 - 862 |
| MER | | dB | > 40 |
| Output level | | dBµV | 80 |
| Adjustable output level | | dB | -15 |
| DVB-T modulation formats | | QPSK ; 16QAM ; 64QAM | |
| DVB-T code ratio | | 1/2 , 2/3 , 3/4 , 5/6 , 7/8 | |
| DVB-T guard interval | | 1/4 , 1/8 , 1/16 , 1/32 | |
| Bandwidth | | MHz | 6 / 7 / 8 |
| Loop step attenuation | | dB | 1.1 |
| DVB-C symbol rate | | MS/s | 7.2 max |
| General | | | |
| Remote control | | Yes | |
| Configuration | | PC. Web, Ikusi Headend Discovery Wizard assistant | |
| Supply voltage | | VDC | +12 |
| Consumption | | A | 2 |
| Firmware upgrade | | Web interface | |
| Operating temperature | | °C | 0 ... +45 |
| CAM | | 1 slot (EN 50221) | |
| Bus IKUNET connector | | 2x RJ-45 | |
| Dimensions | | mm | 230 x 195 x 32 |

DVB-T and DVB-C output

DVB-T/T2 ▶ DVB-T and DVB-C twin transmodulator

MPEG4 ▶ MPEG2 transcoder



- Conversion solution for DVB-T/T2 MPEG4 services to DVB-T/DVB-C MPEG2. This includes the transmodulator function of DVB-T2 channels to DVB-T/DVB-C channels
- The terrestrial HTL-TT2 module can receive 2 DVB-T/T2 muxes and combine them on 2 DVB-T/DVB-C output channels. It handles HD and SD services both on MPEG4 H.264 and on MPEG-2, allowing HD content to be received on SD televisions.
- One module acts as the "master" to ensure the configuration (remote or local through PC) is carried out at the complete headend level, through the IKUNET bus and not module by module.
- With Ikusi's Transcoding solution, the old TV SD equipment does not need to be changed and the latest content can still be enjoyed. The Ikusi headend offers the chance of deciding when and how to up-date the television sets.

| MODEL | | HTL-TT2 |
|--|------|---|
| REF. | | 3859 |
| Inputs | | 1 (dual tuner) |
| Standard | | EN 300 744 DVB-T ; EN 302 755 DVB-T2 |
| Reception | | DVB-T / DVB-T2 |
| Frequency band | MHz | 47 - 862 |
| No. tuned programs | | -If transcoder activated, treatment capacity is limited to 4 channels and up to 8 audio streams. -If transcoder deactivated, treatment capacity is limited only by output bitrate. Typically up to 31 Mbps for DVB-T and up to 55 Mbps for DVB-C. -Transcoder does not treat subtitles HD to subtitle SD. |
| Input level | dBµV | 40 - 92 |
| Input loop gain | dB | 0 (±1) |
| TS Processing | | |
| PSI/SI adaptation | | Generating and inserting tables PAT, PMT, CAT, SDT, NIT, TOT and BAT |
| NIT (Network Information Table) adaptation | | Yes (generated automatically) |
| SDT (Service Description Table) adaptation | | Yes (configurable name input) |
| Processing LCN, TDT, TOT | | Yes |
| Transcoding | | |
| Supported usecases | | 1080i mpeg4 > 576i mpeg2 576i mpeg4 > 576i mpeg2 |
| Audio | | AC3 > mpeg I layer II AC3Plus > mpeg I layer II |
| Outputs | | DVB-T in accordance with ETSI EN 300 744 DVB-C in accordance with ETSI EN 300 429 |
| No. of outputs | | 2 channels DVB-T / DVB-C |
| Frequency band | MHz | DVB-T: 47 - 862 DVB-C: 47 - 862 |
| Operation modes | | 2K ; 8K |
| MER | dB | > 40 |
| Output level | dBµV | 80 |
| Adjustable output level | dB | -15 |
| DVB-T modulation formats | | QPSK ; 16QAM ; 64QAM |
| DVB-T code ratio | | 1/2 , 2/3 , 3/4 , 5/6 , 7/8 |
| DVB-T guard interval | | 1/4 , 1/8 , 1/16 , 1/32 |
| Bandwidth | MHz | 6 / 7 / 8 |
| Loop step attenuation | dB | 1.1 |
| DVB-C symbol rate | MS/s | 7.2 max |
| Frequency stability | ppm | ≤ ±30 |
| General | | |
| Remote control | | Yes |
| Configuration | | PC. Web, Ikusi Headend Discovery Wizard assistant |
| Supply voltage | VDC | +12 |
| Consumption | A | 2 |
| Firmware upgrade | | web interface |
| Operating temperature | °C | 0 ... +45 |
| IKUNET bus connector | | 2x RJ-45 |
| Dimensions | mm | 230 x 195 x 32 |

Power supply



- The CFP-900 power supply has been designed to supply enough power to most ClassA headend configurations.

Its high output current capacity (9A) means it must be used with a high current plug bridge, supplied with all IKUSI ClassA devices and vital in installations that demand more than 5A (see picture).

- The CFP-900 power supply also has all the necessary auxiliary outputs to supply external elements like preamplifiers and LNBs.

Other differentiating characteristics are its high efficiency and the fact that it implements a power factor corrector to optimize mains consumption.

| MODEL | | CFP-900 |
|---|-----|---|
| REF. | | 4492 |
| Regulation type | | switch mode |
| Mains supply voltage (50/60 Hz) | VAC | 100- 240 |
| Outputs | | +12V (9A) ClassA modules +24V (60mA) for mast preamplifiers +18V (300mA) for LNB +18V / 22kHz (300mA) for LNB +13V (300mA) for LNB +13V / 22kHz (300mA) for LNB |
| Max total current for +24, +18 and +13V | mA | 700 |
| Efficiency | % | > 85 |
| Operating temperature | °C | -10 ... +55 |
| Mains lead | | Yes |
| Dimensions | mm | 230 x 195 x 48 |

Multiplexor



- Application in large ClassA headends where the modules (processors, receivers, transmodulators, modulators, regenerators) are mounted in several deck-arranged rack-frames or baseplates. The AMX-400 is a 4-input combiner that has been designed to combine up to 24 channels (6 channels per input).
- The system is expandable, so that it is possible to combine up to 96 channels by using 4 AMX-400 and one final passive combiner (or another AMX at IMD decrease's expense).
- The sum of the combined signals is connected to the HPA launch amplifier.

| MODEL | | AMX-400 |
|---|-----|----------------|
| REF. | | 4433 |
| No. of inputs | MHz | 4 |
| Frequency range | dB | 45 -862 |
| Response flatness | dB | ±1.5 |
| Gain | dB | 7 |
| IMD for 4x6 channels, 72 dBµV input level | dB | -75 |
| Output variable attenuator | dB | 0 - 10 |
| Input and output return loss | dB | ≥ 10 |
| Output test | dB | -20 ±1 |
| Supply voltage | VDC | +12 |
| Consumption | mA | 470 |
| RF and test connectors | | Female F |
| DC connectors | | banana socket |
| Dimensions | mm | 230 x 195 x 32 |

Power amplifier



- Amplification of the combined multichannel signal in a ClassA assembly.
- Variable attenuation is shared on two interstage sections, featuring delayed behaviour on the first one. Maintenance of a low noise figure.
- Extension input allows coupling of the wideband signal provided by another existing headend.
- Each module is packed with a DC plug bridge, 53 mm length, for connection of +12 VD voltage.

| MODEL | | HPA-125 | |
|---|-----------|--------------------|----------|
| REF. | | 4427 | |
| Technology | | Push-pull | |
| Bandwidth | MHz | 47 - 862 | |
| Gain | dB | 45 | |
| Interstage variable attenuator | dB | 0 - 20 | |
| Noise figure | dB | ≤ 6 | |
| Output level (IMD3 -60dB, DIN 45004B) | dB | ≥ 125 ¹ | |
| Output level (IMD2 -60dB, EN 50083-3) | dBμV | ≥ 120 | |
| Output level (CTB -60 dB, EN 42 channels) | dBμV | ≥ 111 | |
| Output level (CSO -60 dB, EN 42 channels) | dBμV | ≥ 115 | |
| Input test | dBμV | -20 ±1.5 | |
| Output test | dB | -30 ±1 | |
| Extension input | Bandwidth | MHz | 47 - 862 |
| | Gain | dB | 6 |
| Supply voltage | VDC | +12 | |
| Consumption | mA | 830 | |
| RF and Test connectors | | female F | |
| DC connector type | | banana socket | |
| Dimensions | mm | 230 x 195 x 32 | |

Sat-IF combiner/amplifier



- Application in ClassA headends to drive Sat-IF distribution lines. One HPA-920 per polarity or IF signal being distributed.
- 1 satellite IF input port, with adjustable gain and 0 / 7 dB switchable slope to compensate for cable losses ; 1 terrestrial TV coupling port ; 1 combined TV+IF output port ; 1 output test port.
- "Banana" socket to connect the power for the attached LNB.

| MODEL | | HPA-920 |
|--|------|------------------------------|
| REF. | | 4437 |
| Sat-IF band | MHz | 950 - 2150 |
| Response flatness | dB | ±1 |
| Nominal gain | dB | 40 |
| Continuous gain adjustment | dB | 0 - 18 |
| Slope switchable | dB | 0 / 7 |
| Output level (-35 dB IMD3, EN 50083-3) | dBμV | ≥ 120 |
| Input/output return loss | dB | ≥ 10 |
| Noise figure | dB | < 7 |
| TV band | MHz | 5 - 862 |
| Output test (TV+IF) | dB | TV : -30 ±1 .. IF : -30 ±1.5 |
| Supply voltage | VDC | +12 |
| Consumption | mA | 250 |
| Dimensions | mm | 230 x 195 x 32 |

Programming unit



| | |
|-------|---------|
| MODEL | SPI-300 |
| REF. | 4070 |

- For programming the ClassA modules. Cable connection to the DB-9 front panel socket.
- 20x4 character alphanumeric display. Numerical and function keys.
- Microprocessor controlled. User friendly software (selectable language: english, spanish, french). Built-in diagnostic and error identification. Module firmware update. Firmware of the SPI-300 can also be updated through a PC.
- Capacity of 500 preset memory allocations for repetitive ClassA module configurations.
- No battery required. Powered through the interface lead (max consumption: 150 mA). DC jack to connect a +15 VDC voltage from an auxiliary power supply when updating the internal firmware through a PC.
- Dimensions: 160x75x40 mm.

ClassA accessories



SMR-601

PMR-601

OMR-601



BAS-700

COF-700

| MODEL | REF. | DESCRIPTION |
|---------|------|---|
| SMR-601 | 4280 | Rack-frame for ClassA assemblies, 6U high. Easy integration in standard 19" racks. Capacity: 7 modules. |
| PMR-601 | 4281 | Fixing-plate to fasten a ClassA module to the SMR-600 rack-frame. |
| OMR-601 | 4282 | 6U - 12E (260x60 mm) blank panel to fill the unoccupied places on the SMR-601 rack-frame. |

| MODEL | REF. | DESCRIPTION |
|---------|------|--|
| BAS-900 | 4411 | Base plate. Capacity: 9 modules. Dimensions: 563x257x24 mm. |
| BAS-700 | 4403 | Base plate. Capacity: 7 modules. Dimensions: 441x257x24 mm. |
| COF-700 | 4402 | Housing for 1 BAS-700. Dimensions: 430x341x258 mm. Indoor mounting. Metallic. Lock/key closing system. |
| BUS-013 | 4430 | Pack containing 11 (10x short + 1x long) jumpers for IKUSUP communication bus between ClassA modules. |


It receives contents from 4 DVB-T/T2, DVB-S/S2 or DVB-C transponders/muxes and broadcasts them in 4 DVB-T, DVB-C or IP output channels.



- Quad universal tuner
- Output 4 DVB-T or DVB-C selectable channels
- Remote management enabled
- It allows a future increase in services
- It allows a video service to be sent with several different languages without taking up more space
- It allows channel lineups to be created and managed remotely
- Power supplied through the backplane, without bridges
- European Product

 Headend that allows to use four independent inputs (to be used with a multiswitch) or to use in "1 Input + Loop through" mode (for Unicable or terrestrial/cable antenna installations).

Exemple d'application

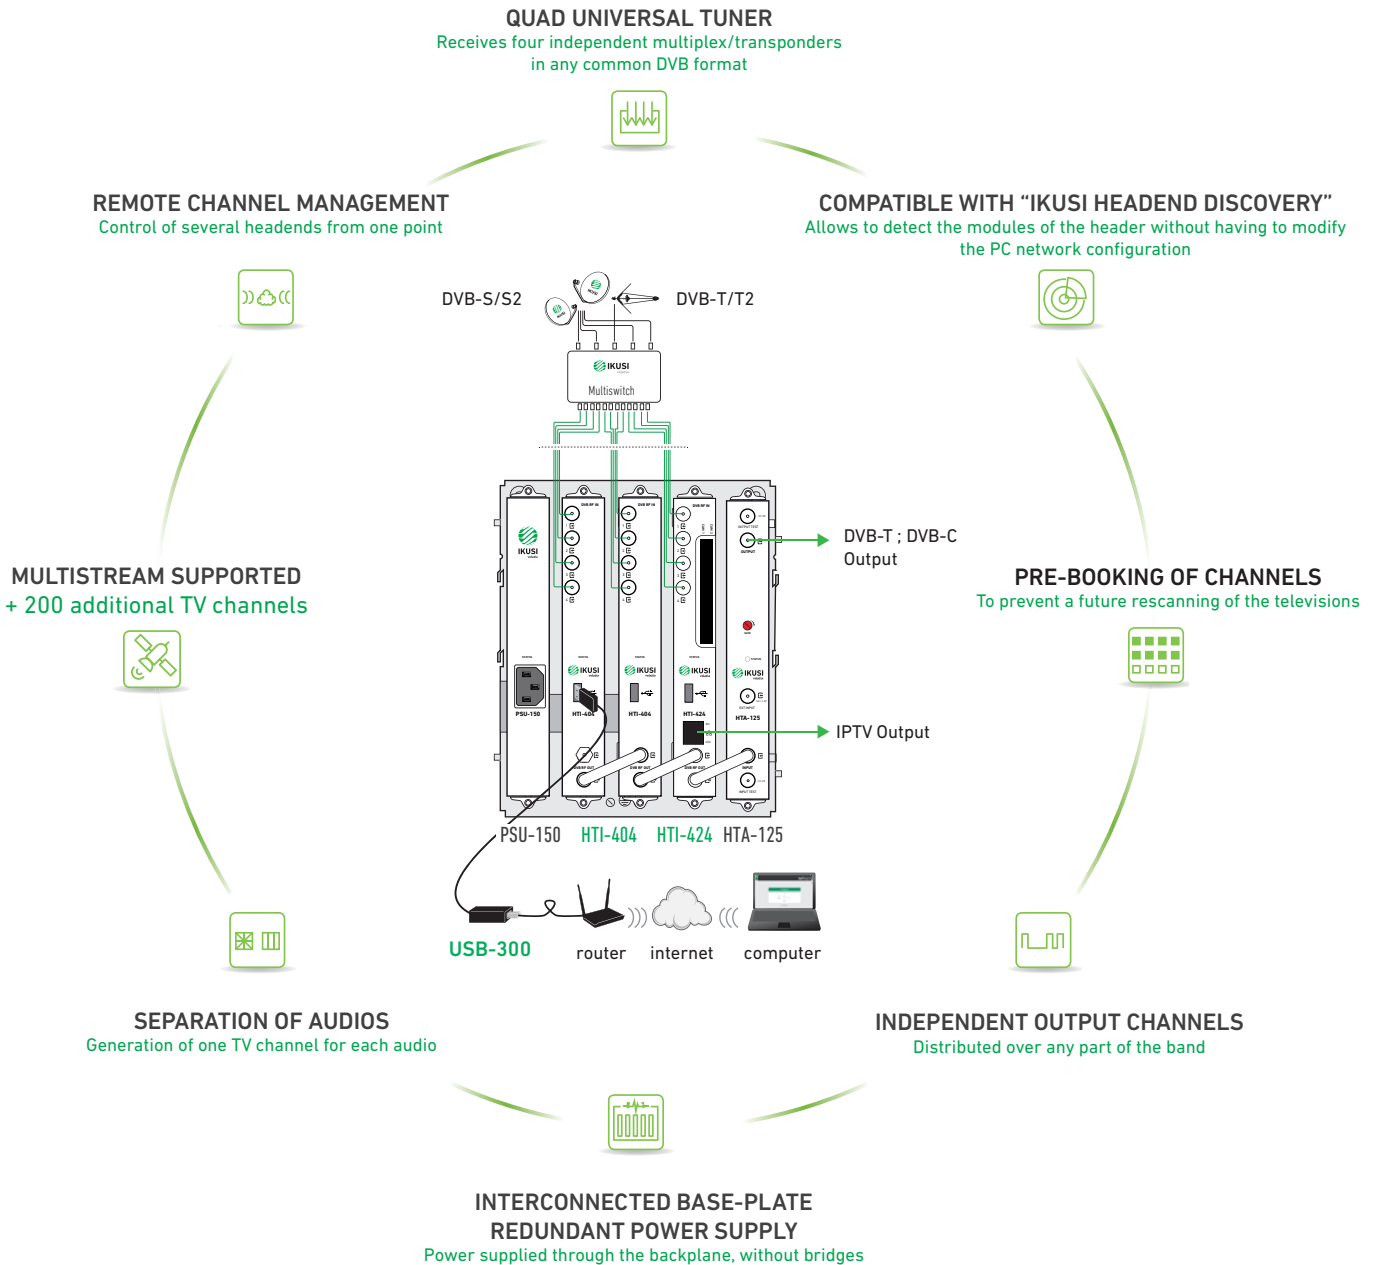

NEW PRODUCT

HTI-424 Quad universal tuner DVB-T/T2/S/S2/C ▶ DVB-T/C or IPTV

DVB-T and DVB-C Output

DVB-T/T2/S/S2/C ▶ DVB-T/C Quad transmodulator



- Versatile transmodulation of DVB-T/T2, DVB-S/S2 and DVB-C channels to DVB-T/DVB-C channels.
- The HTI-404 module can receive 4 DVB-T/T2, DVB-S/S2 or DVB-C muxes and broadcasts them in 4 DVB-T or DVB-C output channels.
- One module acts as the “master” to ensure the configuration (remote or local through PC) is carried out at the complete headend level, through the IKUNET bus and not module by module.
- It allows a future increase in services to be foreseen in order for the televisions to have them already on their lists, avoiding the need for retuning.
- It allows a video service to be sent with several different languages without taking up more space than that corresponding to an RF channel. The television shows “a programme” for each language, avoiding the need for users to have to choose their “language” on the television remote control.
- It is compatible with the PC application: “IKUSI HEADEND DISCOVERY” This instrument provides installers with a tool that allows them to detect the headend’s modules without having to modify the PC’s network configuration.
(This can be downloaded from www.ikusitv.com).
- It allows channel lineups to be created and managed remotely, ensuring that the lineup is completely customisable without having to work in-situ.
- The four DVB-T/C output channels can be distributed onto any part of the band.
- Total control of the multiswitch. Fitted with DiSEqC.

| MODEL | | HTI-404 |
|-------------------------------|------|---|
| REF. | | 3864 |
| Inputs | | 4 |
| Input frequency range | MHz | DVB-T/T2: 47 - 862 DVB-S/S2: 950 - 2150 DVB-C: 47 - 862 |
| Input level | dBµV | 40 - 92 |
| Symbol rate | MS/s | DVB-S: 1...45 DVB-S2: 1... 45 DVB-C: 1... 6.952 |
| Maximum input current | | 100mA in 2,3 and 4 connectors. 250mA in 1 connector |
| Fitted with DiSEqC (v. 1.1) | | No limit on number of polarities |
| TS Processing | | |
| PSI/SI adaptation | | Generating and inserting tables PAT, PMT, CAT, SDT, BAT, NIT, TDT, TOT, EIT |
| NIT adaptation | | Yes (automatically generated) |
| SDT adaptation | | Yes (configurable input name) |
| LCN, TDT, TOT management | | Yes |
| Cloned services | | Yes, from any input to any output |
| Outputs | | |
| Number of outputs | | 4 channels DVB-T / DVB-C (47 - 862 MHz) |
| MER | dB | > 40 |
| Output level | dBµV | 85 |
| Maximum output bit rate DVB-T | Mbps | 31.7 |
| Operation modes DVB-T | | 2K / 8K |
| Output bandwidth DVB-T | MHz | 6 / 7 / 8 |
| Modulation formats DVB-C | | 16 QAM / 32 QAM / 64 QAM / 128 QAM / 256 QAM |
| Maximum output bit rate DVB-C | Mbps | 53 |
| Adjustable output level | dB | -15 |
| Symbol rate DVB-C | MS/s | 3 ... 7.2 |
| Output loop-through loss | dB | 1.1 |
| General | | |
| Configuration | | PC. Interface web Ikusi Headend Discovery (v1.8.5) |
| Management interface | | USB 2.0 Host frontal |
| Supply voltage | VDC | +24 |
| Operating temperature | °C | 0... +45 |
| Consumption | A | 0.67 |
| Dimensions | mm | 230 x 195 x 32 |

DVB-T / DVB-C / IPTV Output

DVB-T/T2/S/S2/C ▶ DVB-T/C, IPTV Transmodulator



New

- Versatile transmodulation of DVB-T/T2, DVB-S/S2 and DVB-C channels to DVB-T/DVB-C channels.
- The HTI-424 module can receive 4 DVB-T/T2, DVB-S/S2 or DVB-C muxes and broadcasts them in 4 DVB-T or DVB-C or on IPTV output channels.
- One module acts as the "master" to ensure the configuration (remote or local through PC) is carried out at the complete headend level, through the IKUNET bus and not module by module.
- It allows a future increase in services to be foreseen in order for the televisions to have them already on their lists, avoiding the need for retuning.
- It has two Common Interface slots (EN 50221) for discretionary decryption of programmes in accordance with the inserted CAM module.
- It allows a video service to be sent with several different languages without taking up more space than that corresponding to an RF channel. The television shows "a programme" for each language, avoiding the need for users to have to choose their "language" on the television remote control.
- It is compatible with the PC application: "IKUSI HEADEND DISCOVERY" This instrument provides installers with a tool that allows them to detect the headend's modules without having to modify the PC's network configuration.
(This can be downloaded from www.ikusi.tv).
- It allows channel lineups to be created and managed remotely, ensuring that the lineup is completely customisable without having to work in-situ.
- The four DVB-T/C output channels can be distributed onto any part of the band.
- Total control of the multiswitch. Fitted with DiSEqC.
- USB-300 to Ethernet adapter for local or remote configuration. Also, it can be done through the Ethernet port.

| MODEL | | HTI-424 |
|----------------------------------|------|---|
| REF. | | 3863 |
| Inputs | | 4 (or 1+loop through) |
| Input frequency range | MHz | DVB-T/T2 : 47-862 DVB-S/S2 : 950 - 2150 DVB-C : 47-862 |
| Input level | dBµV | 40 - 92 |
| Symbol rate | MS/s | DVB-S: 1...45 DVB-S2: 1... 45 DVB-C: 1... 6.952 |
| Maximum input current | | 100mA in 2 and 4 connectors. 250mA in 1 and 3 connectors |
| Fitted with DiSEqC (v. 1.1) | | No limit on number of polarities |
| TS Processing | | |
| PSI/SI adaptation | | Generating and inserting tables PAT, PMT, CAT, SDT, BAT, NIT, TDT, TOT, EIT |
| NIT adaptation | | Yes (automatically generated) |
| SDT adaptation | | Yes (configurable input name) |
| LCN, TDT, TOT management | | Yes |
| Cloned services | | Yes, from any input to any output |
| Number of Common Interface slots | | 2 |
| RF Output | | |
| Number of outputs | | 4 channels DVB-T / DVB-C (47 - 862 MHz) |
| MER | dB | > 40 |
| Output level | dBµV | 85 |
| Maximum output bit rate DVB-T | Mbps | 31.7 |
| Operation modes DVB-T | | 2K / 8K |
| Output bandwidth DVB-T | MHz | 6 / 7 / 8 |
| Modulation formats DVB-C | | 16 QAM / 32 QAM / 64 QAM / 128 QAM / 256 QAM |
| Maximum output bit rate DVB-C | Mbps | 53 |
| Adjustable output level | dB | -15 |
| Symbol rate DVB-C | MS/s | 3 ... 7.2 |
| Output loop-through loss | dB | 1.1 |
| IPTV Output | | |
| Number of SPTS outputs | | 64 |
| Number of MPTS outputs | | 4 |
| Transmission protocols | | SPTS : UDP and RTP MPTS : UDP |
| SAP protocol | | Yes |
| Interface type | | RJ-45 Gigabit Ethernet |
| Output maximum bit rate | | 850 Mbps |
| General | | |
| Configuration | | PC. Interface web Ikusi Headend Discovery (v1.8.5) |
| Management interface | | USB 2.0 Host frontal |
| Supply voltage | VDC | +24 |
| Operating temperature | °C | 0... +45 |
| Consumption | A | 1 |
| Dimensions | mm | 230 x 195 x 32 |
| Weight | kg | 1.165 |
| Protection index | IP | IP20 |

Power supply



COR-150

- The PSU-150 power supply has the capacity to deliver power to the most demanding HTI headend configuration.
- The current distribution is done through the BACK-500 base plate, without plug bridges.
- The power supply can be installed in any position of the BACK-500 base plate, except in the slot reserved to the master device (second slot)
- Moreover, its design allows to use the power supply in installations with 2 power supplies, working in redundant way.

| MODEL | | PSU-150 |
|---------------------------------|-----|------------------------------------|
| REF. | | 3865 |
| Regulation type | | switched-mode |
| Mains supply voltage (50/60 Hz) | VAC | 100 - 240 |
| Output voltage | V | +24 |
| Max current | A | 6.5 |
| Efficiency | % | > 89 |
| Operating temperature | °C | -10 ... +45 |
| Mains lead | | Class I IEC 320/C13 (not included) |
| Dimensions | mm | 230 x 190 x 33 |

| MODEL | | COR-150 |
|------------|--|------------------------|
| REF. | | 4404 |
| Mains lead | | SCHUKO elbow connector |

Power amplifier



- Amplification of the signal generated by a headend of HTI modules. Additionally, the HTA-125 has an extension input that facilitates coupling of the signal provided by another existing headend.

| MODEL | | HTA-125 | |
|---------------------------------------|-----------|----------------|----------|
| REF. | | 3868 | |
| Bandwidth | MHz | 47 - 862 | |
| Gain | dB | 45 | |
| Interstage variable attenuator | dB | 0 - 20 | |
| Noise figure | dB | ≤ 6 | |
| Output level (IMD3 -60dB, DIN 45004B) | dB | ≥ 125 | |
| Output level (IMD2 -60dB, EN 50083-3) | dBμV | ≥ 120 | |
| Input test | dBμV | -20 ±1.5 | |
| Output test | dB | -30 ±1 | |
| Extension input | Bandwidth | MHz | 47 - 862 |
| | Gain | dB | 6 |
| Supply voltage | VDC | +24 | |
| Consumption | mA | 450 | |
| Operating temperature | °C | -10... +55 | |
| RF and Test connectors | | Female F | |
| Dimensions | mm | 230 x 195 x 32 | |

Base-plate for HTI Headend





Base-plate BACK-500


| | |
|-------|----------|
| MODEL | BACK-500 |
| REF. | 3866 |

- The BACK-500 base-plate allows to fix mechanically the HTI product range modules, to distribute the supply lines and to communicate the different modules that are inserted in the headend.
- The base-plate is formed by two parts:
 1. Backplane
 2. USB bridge
- The backplane is in charge of fixing the modules, distributing the power supply and carrying the communication lines towards the USB bridge.
- The USB bridge is in charge of connection all the modules that are inserted in the base-plate with the master module.
- Interconnected base-plate, does not need alimentation bridges between modules.
- The base-plate can be fixed to the wall or in a rack frame by means SR-HTI of fixing accessories (joining 2 base-plates).

Fitting modules in the base-plate

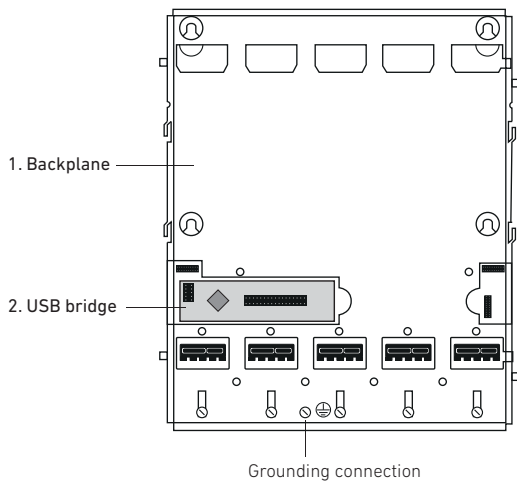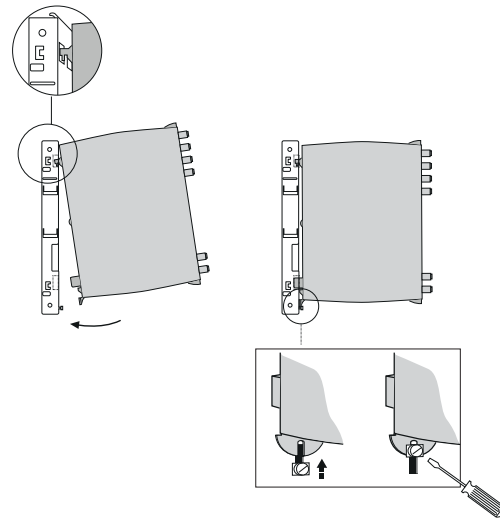

Horizontal joining of two BACK-500 base-plates

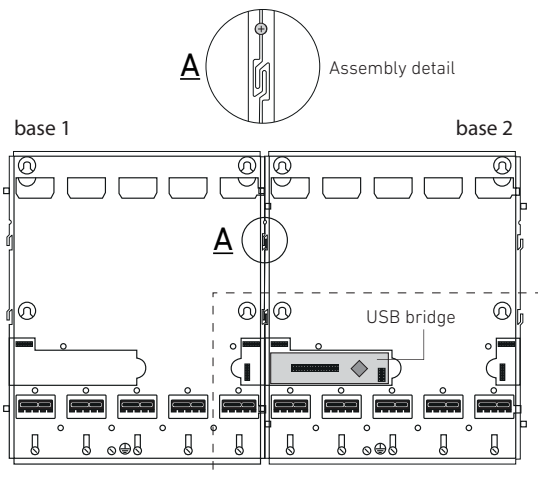


| | |
|-------|---------|
| MODEL | UAH-001 |
| REF. | 3870 |

Bridge for electrical connection between two bases BACK-500



UAH-001 Bridge



USB-Ethernet adapter for local or remote control



| MODEL | USB-300 | |
|-----------------------------|---|---|
| REF. | 4284 | |
| Connectivity | | |
| Device Interfaces | RJ-45 Ethernet Port (10/100/1000 Mbps) | USB Type A Connector |
| LEDs | Speed (orange) | Link/ACT (green) |
| Standards | USB Specification Version 3.0 USB Specification Version 2.0 USB Specification Version 1.1 USB Specification Version 1.0 OHCI (Open Host Controller Interface) | EHCI (Enhanced Host Controller Interface) IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T, TX, and T4 compatible Supports suspended mode and remote wakeup Supports full and half duplex in gigabit Ethernet mode |
| General | | |
| Minimum System Requirements | Operating system: Microsoft Windows 8/7/ Vista/XP SP3 | Mac OS 10.6 to 10.8 Linux kernel 2.6.14x or above |
| Power Management | Advanced Power Management reduces power usage during idle or light traffic periods | |
| Physical | | |
| Power | Input: Bus-powered 500 mA, 5 V DC | Consumption: 150 mA, 3.3 V DC |
| Temperature | Operating: 0 to 45 °C (32 to 113 °F) | Storage: -20 to 70 °C (-4 to 158 °F) |
| Humidity | Operating: 10% to 90% non-condensing | Storage: 5% to 90% non-condensing |
| Dimensions | 74.4 x 21 x 16 mm (2.93 x 0.83 x .063 inches) | |
| Weight | 46.4 grams (1.64 oz) | |
| Certifications | CE | FCC |


Support to install the headend in a 19" rack



| MODEL | SR-HTI |
|--------------------|------------------|
| REF. | 3867 |
| Number of supports | 2 units |
| Handles | 2 plastic units |
| Material | Galvanized sheet |
| Dimensions | 26,5 x 20 cm |

Special Accessories


| MODEL | REF. | DESCRIPTION |
|---------|------|---|
| ADA-HTI | 4285 | Special bridges, to install ClassA modules in the HTI base-plate (BACK-500) |




Two solution types with HTI-424 transmodulators. Coaxial and IPTV outputs.

Application examples

COAXIAL OUTPUT

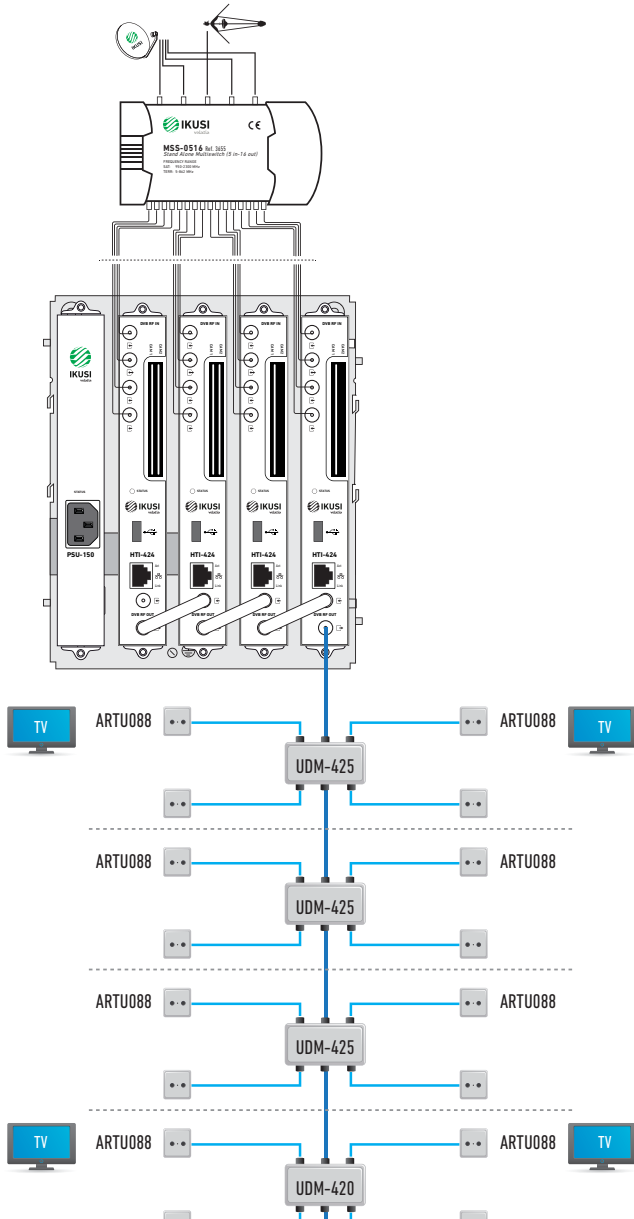

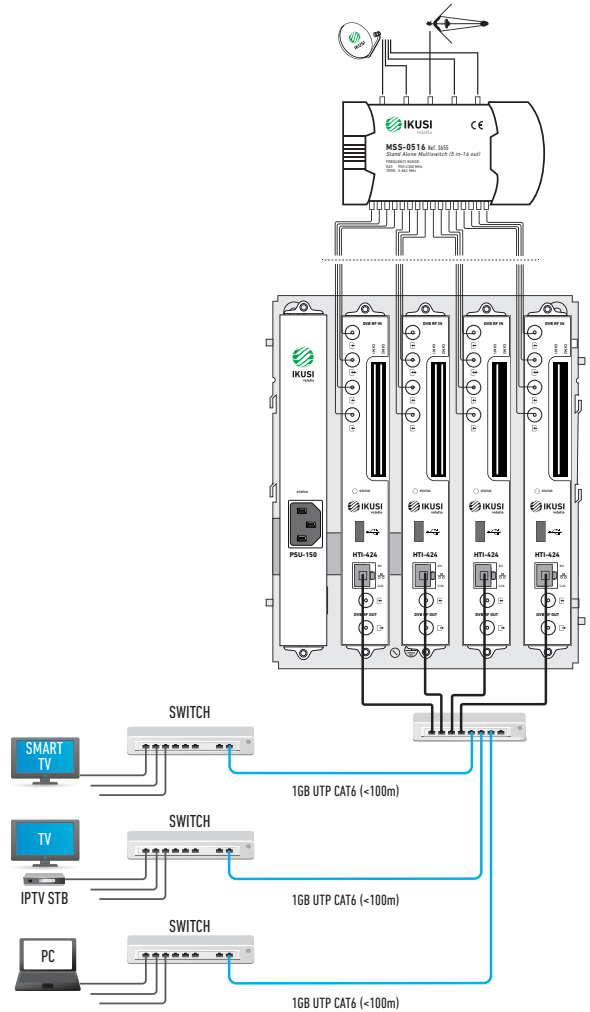

IPTV OUTPUT



The first Smart Headend for television



Ikusi Flow Headend

- **L**icense Free
 - **I**nternal satellite and terrestrial multiswitch included. Easy remote operation, no cabling needed
 - **E**asy set up and commissioning, fastest in the market
 - **P**rogramming and control through LAN or WiFi
 - **H**igh density output. More than 50 multiplexes in one rack
 - **A**dd new services without re-scanning TV sets
 - **D**ual CI modules for descrambling. IP pool technology
 - **I**nternal 2x1Gb IPTV output ports. No additional hardware is needed
 - **D**emultiplexing MPTS to SPTS
- 
- 
- Requests
Your demo
now!
- **H**igh density input. Up to 40 transponders in one rack
 - **A**dvanced audio languages management
 - **I**nternal DRM scrambling. All solutions in one!
 - **N**oiseless fan. Auto speed regulation and fully hot-swappable
 - **S**tream processing included to save bandwidth through services filtering
 - **O**ptional redundancy for all modules
 - **I**P Device Manager Software, compatible with Samsung/LG/Philips TVs directly. Others through STB
 - **H**ot-swap for IN/OUT/SEC modules. The whole configuration is transferred automatically to the new module



FLOW IN2 (Ref. 4318) and **FLOW IN4** (Ref. 4319)

Input module. Frontend.

- . Double tuner. Universal Input module DVB S/S2/T/T2/C.
- . Auto Scan: Discovers all the services in the cables.
- . HOT SWAP without reconfiguring manually.



FLOW SEC (Ref. 4311)

Security management module.

- . Decrypting function (CAS) and re-encrypting function (DRM).
- . 2 x CI slots per module.
- . Manages streams coming from any input and going to any output ("uncoupled" input, CAM and output).
- . CAM restoration in case of decryption failure.
- . Supports up to 15 SPTS per CAM (up to 30 SPTS per module).



FLOW ENC (Ref. 4315)

Encoding module.

- . Encodes 4 x HDMI input signals.
- . H.264 MPEG-4 or MPEG-2 video compression.
- . Full HD quality.
- . Up to 40 x HDMI inputs in 4RU space.



FLOW OUT (Ref. 4313)

Output module. Backend.

- . Quad Universal and Multistandard output module DVB-T & DVB-C.
- . Four carriers in 8K.
- . Up to 8 SPTS per carrier = up to 32 SPTS per module.
- . Output level: 78 to 108 dbuV.



FLOW HUB (Ref. 4314)

Control unit of the platform.

- . Complete internal management .
- . Connected headend: Ikusi Flow wifi and LAN access. Local and remote management.
- . Guided installation through a wizard.
- . 2 Gigabit Ethernet ports for IP Multicast services.
- . Spare modules support for redundancy.



FLOW PSU (Ref. 4308)

Power supply for the platform.

- . More efficiency: Half-Bridge topology.
- . Thermal protection (to protect against external cooling failures).
- . Power factor corrector.



FLOW BASE (Ref. 4312)

Chassis of the platform.

- . "Self-assembly" chassis.
- . 19" rack and wall mounting with the same chassis.
- . Installation without tools or accessories.
- . Real 4 RU (including wires passing).



FLOW RPSU REDUNDANT (Ref. 4320)

Redundant power supply.

- . Ensuring uninterrupted power in the event of failure of one of the two available power supplies.
- . The damaged power supply can be changed without disconnecting the headend from the power.
- . Integrates two identical power supplies in a 1RU (rack unit) chassis.



FLOW COVER (Ref. 4316)

Ventilation cover for the platform.

- . Magnetic attachment system with triple function: securing the cover to the chassis, electrical connection and fans speed auto-management.
- . 5 fans per cover.
- . New noiseless fans generation based on magnetic technology, without rubbing or friction.



FLOW STB (Ref. 1050)

Set-Top-Box to be integrated with FLOW DEVICE MGR.

- . High Quality Sound and Image.
- . Quick Data Processing.
- . Functions on Demand.
- . Programmable remote control.



FLOW IRD Extender (Ref. 1051)

FLOW STB AC3+ IP (Ref. 4329)

FUNCTIONALITY


DEVICE MANAGER



Device Manager is the new Application integrated into Ikusi FLOW that offers management of the contents and of the devices on the IPTV network in a centralised way, allowing:

- Different lists to be made, offering the possibility of sending groups of content to devices either individually or in groups. It allows the contents available to be controlled on each of the televisions.
- The content that is to be reproduced on each viewing device (or multi-screen spaces) to be selected individually in a remote manner, allowing what is being reproduced at each viewing point to be managed and controlled.
- Televisions by the main manufacturers can be turned on, turned off and the sound controlled as on or muted. The list of available services can be allocated to groups or individual Televisions and channels can be remotely changed. The state of the Television can be viewed remotely as well as seeing what channel is playing.

Ikusi Device Manager is compatible with the main television brands:

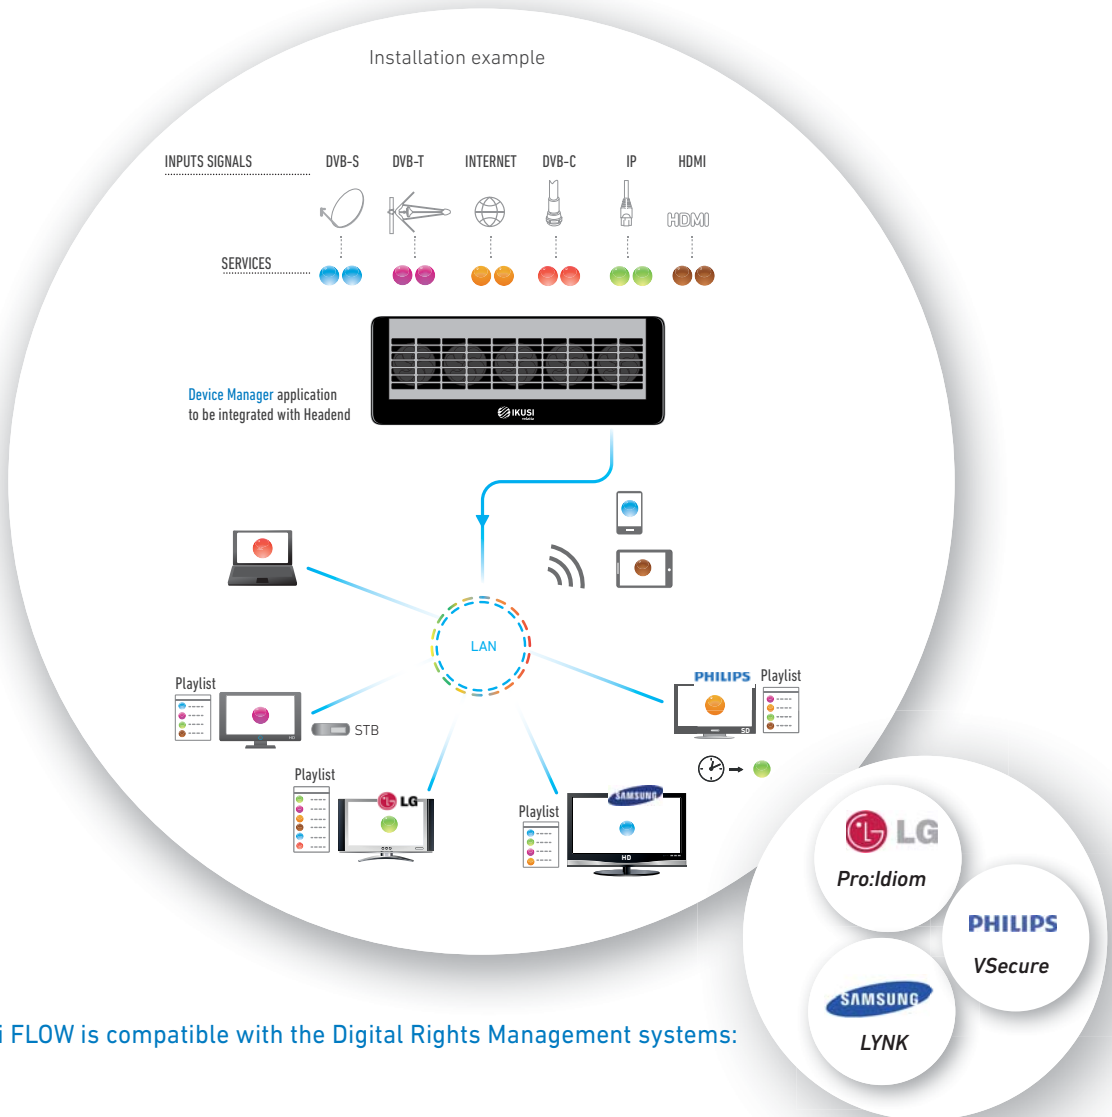

Ikusi FLOW is compatible with the Digital Rights Management systems:

| | | |
|------|------------------------------|--|
| 4336 | FLOW-DRM-LG-PROIDIOM-SEC | License SEC Pro:Idiom |
| 4339 | FLOW-DRM-LG-PROIDIOM-ENC | License ENC Pro:Idiom |
| 4338 | FLOW-DRM-LG-PROIDIOM-HUB-MAN | License HUB Pro:Idiom Manufacturer |
| 4340 | FLOW-DRM-LG-PROIDIOM-HUB-SP | License HUB Pro:Idiom Service Provider |
| 4335 | FLOW-DRM-SAMSUNG-LYNK-HUB | License LYNK |
| 4337 | FLOW-DRM-PHILIPS-VSECURE-HUB | License VSecure |

| | | |
|------|----------|---------------------------|
| 4330 | FLOW WE1 | 1 year warranty extension |
| 4331 | FLOW WE2 | 2 year warranty extension |
| 4332 | FLOW WE3 | 3 year warranty extension |


High definition stand-alone modulator




- HDMI input HD multimedia interface
- CVBS inputs and stereo audio
- HD-SDI input Digital video interface
- DVB-T / DVB-C / IP outputs
- Video playback through USB port
- Remote control via web

☐ A solution that allows audio and video, HDMI or HD-SDI signals to be inserted in DTTV distributions and an output signal in DVB-T / DVB-C and IP to be obtained.

Installation example

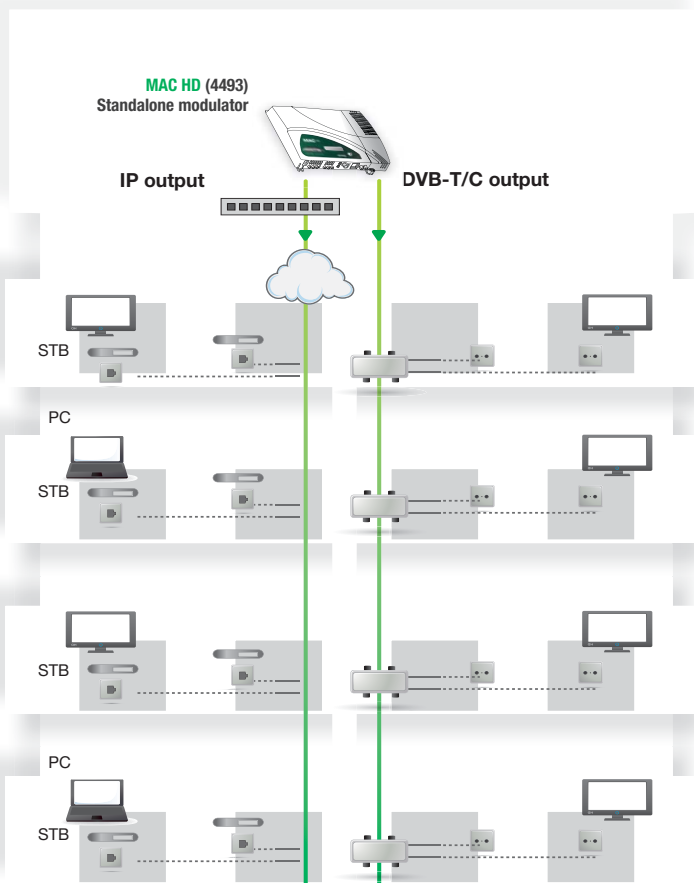

Digital signage application. Allows any business to economically and straightforwardly generate its own advertising and information channel without any equipment other than the MAC HD modulator itself.

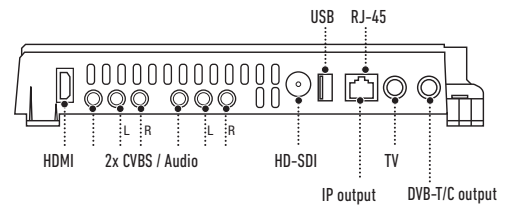

Possible combinations:

- SD CVBS/Audio + SD CVBS/Audio
 - SD HDMI + SD CVBS/Audio
 - SD SDI + SD CVBS/Audio
 - SD + USB
- } 2 simultaneous SD channels
} 1 channel SD + USB
- HD HDMI
 - HD SDI
 - HD + USB
- } 1 channel HD
} 1 channel HD + USB

High definition stand-alone modulator. DVB-T, DVB-C, IP output



- Audio/Video ► DVB-T ; DVB-C and IP
- Two analogue video and audio channels through 6 RCA jacks
- Digital audio and video channel in HDMI format through HDMI connector
- Digital audio and video channel in HD-SDI format through BNC connector
- Web interface configuration by application IKUSI HEADEND DISCOVER

| MODEL | | MAC-HD |
|------------------------------|-------|--|
| REF. | | 4493 |
| Video input | | 4 (2x) CVBS, HDMI, HD-SDI |
| Video standard | | PAL/SECAM/NTSC/B&W |
| Input level CVBS | Vpp | 0.7 - 1.4 |
| Audio inputs | | 1 (mono and stereo) |
| Audio input level (analogue) | | 0.5 - 2.5 |
| Video compression | | MPEG2 MP@ML, H.264/MPEG4 AVC MP L4.1 |
| Audio compression | | MPEG1 layer II |
| Maximum resolution | | 1080p60 |
| DVB-T / DVB-C output | | DVB-T in accordance with ETSI EN 300 744 DVB-C in accordance with ETSI EN 300 429 |
| Bandwidths | MHz | 6 / 7 / 8 |
| Number of carriers | | 2K / 8K |
| MER | dB | ≥ 40 |
| Frequency range | MHz | 45 - 858 |
| Output level | dBuV | ≥ 80 |
| Output attenuation | dB | 0.5 |
| Lever adjustment | dB | -25 |
| Frequency stability | ppm | ±30 |
| Spurious in band | dBc | ≤ -60 |
| Noise figure (ΔB = 8 MHz) | dBc | ≤ -65 |
| Loophrough frequency | | 45 MHz at 2.5 GHz |
| DVB-C symbol rate | Kbps | 3000 - 8000 |
| Constellation | | DVB-T: 16QAM, 64QAM DVB-C: 16QAM, 32QAM, 64QAM, 128QAM, 256QAM |
| IP output | | IEEE 802.3 10/100 Base T |
| IP encapsulated type | | According to ETSI TS 102 034 v1.31(2007-10) and SMPTE ST 2022-2:2007 |
| Outflow IP | | CBR / VBR |
| IP address | | Unicast / Multicast |
| Protocols | | UDP / RTP |
| IP encapsulated format | | SPTS |
| DVB processing | | PAT, PMT, SDT, TOT, TOT |
| NIT and SDT adaptation | | Yes |
| PSI/SI adaptation | | Generation and insertion of PAT, PMT, SDT, NIT tables |
| SID configuration | | Yes |
| Channel name edition (EIT) | | Yes (ex. "camera pool") |
| EIT edition | | Yes (ex. "open 9h from 18h") |
| Firmware upgrade | | Yes, web or USB interface |
| Mains voltage | VAC | 230 - 240 |
| Consumption | W | 19 |
| Dimensions / weight | mm/kg | 300 x 250 x 40 / 2.5 |

The MAC HD model is a standalone modulator unit which can handle different audio and video formats to make up a high-definition DVB-T/C and IP channel which can be active simultaneously.

The unit has three output types:


- DVB-T ; DVB-C and IP.

This product aims to meet video signal distribution requirements in residential facilities, hotels and landmark buildings, along with video surveillance installations with COFDM/QAM and IP digital TV modulation. The MAC HD also has a USB interface to add new functions thanks to the evolving computer software, such as video playback from a USB memory stick for digital signage and other possible future additions.





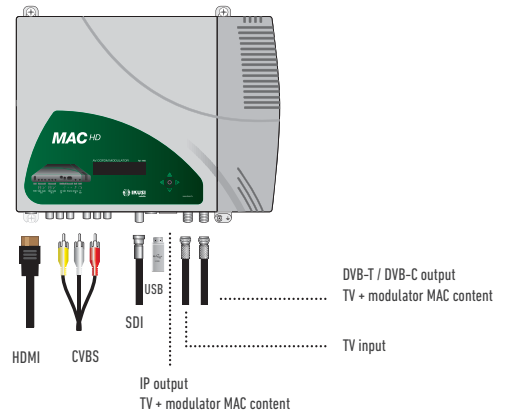


The end user can program the modulator in different ways:

- LCD and joystick placed on the front of the unit.
- Web interface configuration by application IKUSI HEADEND DISCOVERY. (Programming with IP output is only possible with this mode).

Removable power supply



Some of the supported video sources

- Blu-Ray channel 
- DVD channel 
- Satellite channel (IRD) 
- Video surveillance channel 
- Studio channel 
- Information channel 
- Advertising channel USB 

AV-DVB-T stand-alone modulator



- Audio/Video ▶ DVB-T
- Maximum compression quality MPEG-2 & H.264/MPEG-4 AVC
- S-VIDEO and component VIDEO input connector (Y Pb Pr, RGB) for optimum image quality.
- Video playback through USB port.
- LCN support and DVB processing.

| MODEL | | MAC-HOME |
|------------------------------------|---------|--|
| REF. | | 4488 |
| Input | | CVBS, S-VIDEO, Y Pb Pr, RGB, USB |
| Video input level (CVBS) | Vpp | 0.7 ... 1.4 |
| Video standard | | PAL/NTSC/SECAM/B&W |
| Audio input | | 1x mono/stereo |
| Audio input level (analogue) | Vpp | 0.5 ... 2.5 |
| Video compression | | MPEG2 MP@ML, H.264/MPEG-4 AVC MP L4.1 |
| Video resolution | | 720x576, 25 fps (PAL), 720x480, 30 fps (NTSC) |
| Video bitrate | Mbits/s | 3 - 10 |
| Audio | | MPEG1 Layer II |
| Audio bitrate | Kbits/s | 96, 128, 160, 192, 224, 256, 320, 384 |
| DVB Processing | | |
| Insertion of tables | | PAT, PMT, SDT, NIT |
| Configuration | | Channel Name, SID, LCN, NID, Network Name, Provider Name, TSID, ONID, NIT MODE, LCN Private Descriptor |
| DVB-T output | | |
| DVB-T according to ETSI EN 300 744 | | |
| Bandwidth | MHz | 6 / 7 / 8 |
| Number of carriers | | 2k (UK) / 8k (FR) |
| MER | dB | ≥ 35 |
| Central frequency | MHz | 474 - 858 |
| Output level | dBμV | ≥ 80 |
| Output attenuation | dB | ≤ 1.5 |
| Ajuste de nivel | dB | -25 |
| Frequency stability | ppm | ≤ ±30 |
| Noise figure (ΔB=8MHz) | dBc | ≤ -45 |
| Loophthrough | | 45 MHz to 2.5 GHz |
| Mains voltage | VAC | 230 - 240 |
| Consumption | W | 8.1 |
| Dimensions (without connec.) | mm | 210 x 114 x 32 |
| Video input connectors | | 1 RCA (CVBS) ; 1 MINI DIN (S-VIDEO) , Y Pb Pr, RGB ; 1 USB |
| Audio input connectors | | 2 RCA (L and R) |
| Firmware interface | | Included |

USB PLAYER function. Create your own advertising and information channel using only your Mac Home.

The Mac-Home modulator now has a new function to create and play back videos created by users with the software supplied with the product.


Users can create files containing images, videos and music in a simple and intuitive way, and play them on a television network such as a Service Channel (in communities of residents) or those designed for Digital Signage in countless applications, including advertising and information (hotels, restaurants, shopping centres, supermarkets, exhibition rooms, conferences, museums etc.).

After downloading and installing the "conversor-mac-installer.exe" application on their PC, users create a composition of images with audio that can be played back through the modulator's USB port.

Video and image files in the following formats are supported:

- Image: jpg, png, bmp, gif
- Video: wmv, mpg, mp4, ts, avi
- Audio: mp3

Removable power supply

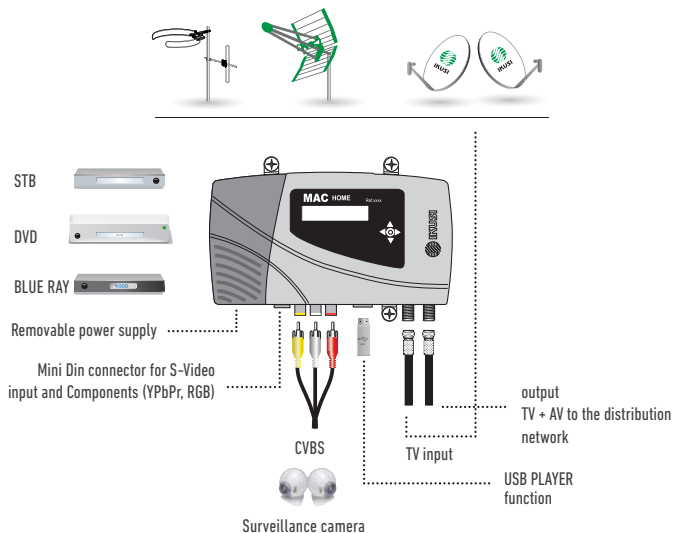

... for communities of residents an information channel on their television



... for restaurants information about daily menus, special deals, etc



... for hotels meeting rooms, exhibitions, messages, etc



... for Public Spaces advertising, user information, news, etc



... for shopping centres new collections, special deals, etc




High definition stand-alone modulator. DVB-T output



- Audio/Video ► DVB-T
- A digital video and audio channel in HDMI format, HDMI connector.
- An analogical CVBS audio and video channel, RCA connectors.
- MPEG4/H.264 coding in HD.
- Cascade installation.

- Possibility of changing the LCN.
- Local configuration with LCD screen.
- Household modulator that allows audio and video signals to be inserted into TV distributions.
- The input source can be: a Blu-ray player, satellite receiver, closed circuit surveillance camera, DVD, etc.

| MODEL | | MAW-300 |
|-------------------------|--|--|
| REF. | | 3030 |
| Video input | | CVBS, HDMI |
| HDMI compression | | |
| Video standard | | PAL/NTSC/SECAM/B&W |
| Audio input | | 1 (mono and stereo) |
| Codificación video | | H.264/MPEG4 MP@L 3.0/3.1/4.0 |
| Video resolution | | input: 480i60, 576i50, 720p60, 1080i50, 1080i60, 1080p60 output: 480p30, 576p25, 720p60, 1080p25, 1080p30 |
| Aspect ratio | | 16:9, 4:3 |
| Video bit rate | | Mbps 1000 - 18000 |
| Audio sample rate | | kHz 48 |
| Audio bit rate | | kbps 64, 96, 128, 192, 256, 320 |
| DVB-T modulation | | |
| Standard | | DVB-T |
| Bandwidth | | MHz 6, 7, 8 |
| Constellation | | QPSK, 16QAM, 64QAM |
| Guard interval | | 1/32, 1/16, 1/8, 1/4 |
| Code rate | | 1/2, 2/3, 3/4, 5/6, 7/8 |
| Transmission mode | | 2K, 8K |
| MER | | dB ≥32 |
| RF frequency | | MHz 139 - 862 |
| RF output level | | dBµV 94 - 104 (0.1 dB step) |
| General | | |
| Management | | Local LCD + control buttons |
| LCN insertion | | Yes |
| Upgrade | | USB |
| Power supply | | VDC 12 |
| Operating temperature | | °C 0 - 45 |
| Dimensions | | mm 183 x 110 x 50 |
| Weight | | kg 1 |

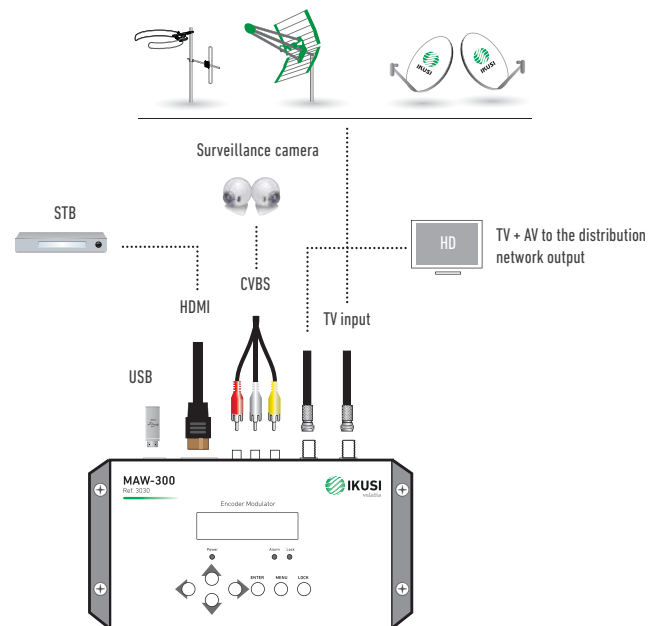



4xAV ▶ DVB-T stand-alone modulator



- Audio/Video ▶ DVB-T
- 4 CVBS and stereo audio input connectors.
- Excellent modulation quality MER: 38dB.
- LCN support (Logical Channel Number).
- AV1 to AV4 are also serially digitalised, coded in MPEG2 and modulated in COFDM. The COFDM base band signal is modulated on an RF carrier that can be adjusted at the output to the VHF and UHF bands.
- RF COFDM DVB-T output.

- Editable channel name and information to be shown on the TV set.
- Modulated channel and USB player channel can be transmitted simultaneously.
- Processing and insertion of PSI/SI tables.
- Remote control and firmware updates via web/Ethernet.
- User interface with LCD display and control button for basic configuration.
- All settings are automatically memorised.
- Reprogrammable as many times as required.
- Firmware updated via Ethernet connection with web browser.
- Replaceable power supply.

| MODEL | | MAC-401 |
|---------------------------------|---------|--|
| REF. | | 4485 |
| Input | | 4x CVBS |
| Video input level (CBVS) | Vpp | 0.7 ... 1.4 |
| Video coding | | PAL/NTSC/SECAM |
| Audio input | | 4x mono/stereo |
| Audio input level | Vpp | 0.5 ... 4.0 |
| Compression video | | MPEG2 MP@ML |
| Video resolution | | 720x576, 25 fps (PAL), 720x480, 30 fps (NTSC) |
| Video Bit Rate | Mbits/s | 3 - 10 |
| Audio | | MPEG1 Layer II |
| Audio Bit Rate | Kbits/s | 96, 128, 160, 192, 224, 256, 320, 384 |
| Insertion of tables | | PAT, PMT, SDT, NIT |
| Configuration | | Channel Name, SID, LCN, NID, Network Name, Provider Name, TSID, ONID, NIT MODE, LCN Private Descriptor |
| Output | | DVB-T according to ETSI EN 300 744 |
| Bandwidth | MHz | 6/7/8 |
| Carriers | | 2K (UK) / 8K (FR) |
| MER | dB | 38 (typ.) |
| Central frequency | | 51 - 858 |
| Output level | dBμV | ≥ 80 |
| Output attenuation | dB | 1 |
| Level adjustment | | -15 |
| Frequency stability | ppm | ≤ ±30 |
| Noise figure (ΔB=8MHz) | dBc | ≤ -70 |
| Loophrough | | Yes |
| Power supply | VAC | 230 - 240 |
| Consumption | | 0.45 A / 30 W |
| Dimensions (without connectors) | | 300 x 250 x 44 |
| Weight | kg | 2.5 |
| LAN connector | | RJ-45 |
| Remote control | | Ethernet 10BaseT 10/100 Mbits/seg |
| Local interface | | LCD + Joystick |
| Remote interfaz / Update | | Web / Ethernet |

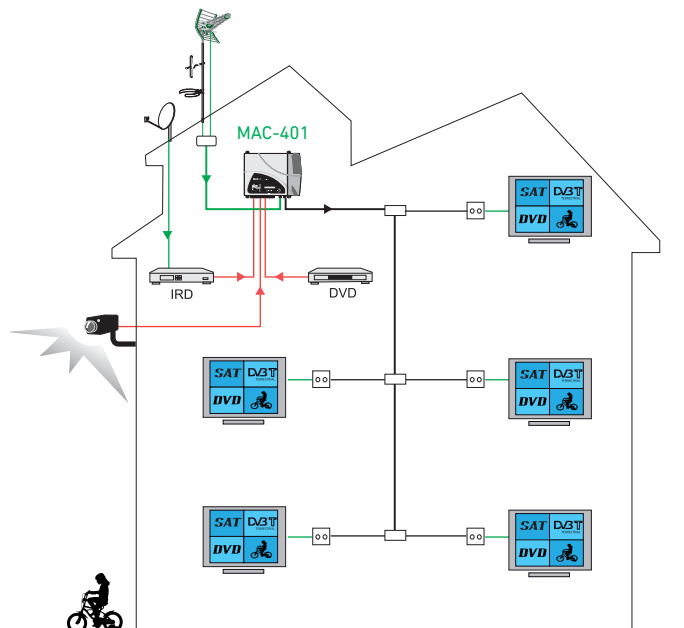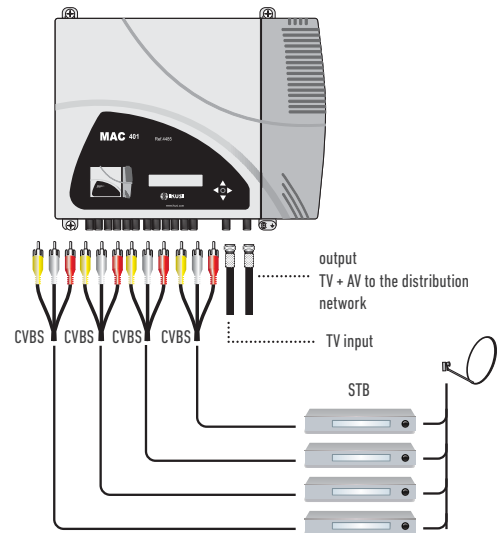

Home DSB TV stand-alone modulator




- The MAW-201 modulator generates double sideband, mono sound TV channels of the systems B/G/D/K/I/L/M/N/Australia.
- Appropriate use with TV satellite receivers, VCR's and video cameras.
- Possible connection of stereo sound sources. L and R signals are summed by the modulator itself.
- Panel potentiometers for audio modulation and RF output level settings.
- Indoor mounting.

| MODEL | | MAW-201 |
|----------------------|---|--|
| REF. | | 3031 |
| Video input | Frequency range Level / Impedance | 20 Hz - 6 MHz 1 ±0.1 V / 75 Ω |
| Audio input | Frequency range Level adjustment Level / Impedance / Deviation * | 20 Hz - 15 Hz 0 ... 7 dB 2x 775 mV RMS / 10 kΩ / 50 kHz* |
| RF output | Level (typical) / impedance Level adjustment Frequency range (programmable) | 85 dBμV / 75 Ω 0 ... -20 dB 45 - 84 MHz ; 170 - 300 MHz ; 470 - 862 MHz |
| Selectable TV system | | B/G/D/K/H/I/L/M/N/AUS-TRALIA |
| Number of outputs | | (1F) RF + (3 RCA) video/audio R-L |
| Number of inputs | | (1F) RF |

| | |
|--|---------------------------------------|
| Sound subcarrier frequency (programmable) | 4.5 MHz ; 5.5 MHz ; 6.0 MHz ; 6.5 MHz |
| Fine tuning range of video carrier frequency (programm.) | ± 2.25 MHz max. by 0.25 MHz step |
| Combining through loss | 2.5 dB |
| Frequency range of RF combining | 45 - 862 MHz |
| Video frequency response | ± 1 dB |
| A/V ratio (programmable) | 12/16 dB |
| Amplitude modulation depth, typical | 81 % |
| Signal/noise ratio, weighted | ≥ 55 dB |
| Supply voltage limit values, power consumption | 198-250 V~ 50/60 Hz 3 W |
| Operating temperature range | -10 °C ... +50 °C |
| Dimensions/Weight (packed) | 133 x 73 x 39 mm / 0.36 kg |

* Available to set standard deviation ± 50 kHz of sound carrier when input level 340 mV/775 mV in both audio inputs.

Installation example

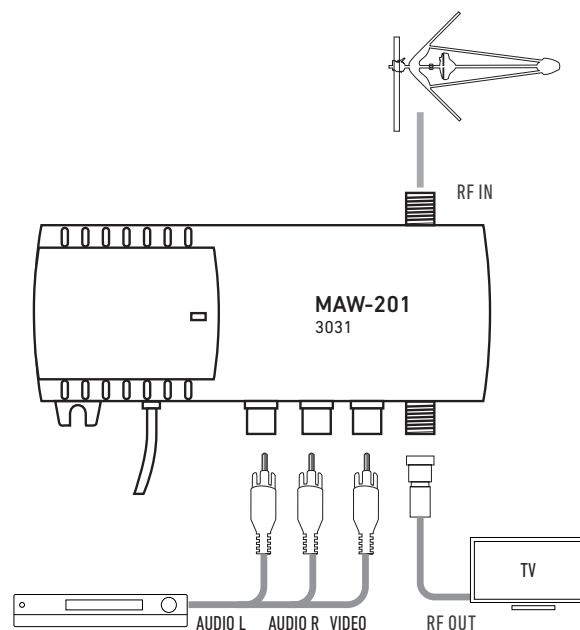

Multi-input encoders

MAC Series



MAC-HD



MAC-401



MAC-HOME

■ MAC-HD

- Two analogue video and audio channels through 6 RCA jacks.
- Digital audio and video channel in HDMI format through HDMI connector.
- Digital audio and video channel in HD-SDI format through BNC connector.
- Three types of output: DVB-T ; DVB-C and IP.


■ MAC-HOME

- Maximum compression quality MPEG-2 & H.264/MPEG-4 AVC.
- Video playback through USB port.
- Output types: CVBS, S-VIDEO, Y Pb Pr, RGB, USB.
- Input: DVB-T.

■ MAC-401

- 4 CVBS and stereo audio input connectors.
- Excellent modulation quality MER: 38dB.
- LCN support
- Firmware updated via Ethernet connection with web browser.
- RF COFDM DVB-T output.

Complete range of multiswitch equipment for stand-alone or cascadable installations including, terrestrial and satellite signals.

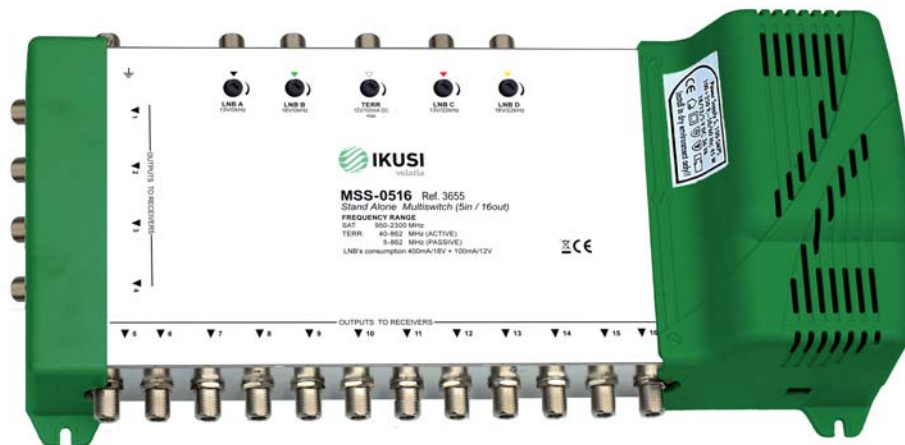


- Stand alone and cascadables Multiswitches
- Shielded multiswitches with integrated power supply
- Distributions up to 32 users
- They support DiseqC2.0 commands
- European Product

☐ A solution for distributing the signals from 1 to 4 satellites for up to 32 users.


Installation example

STANDALONE


1 satellite and 20 users




2 satellites and 20 users



4 satellites and 20 users

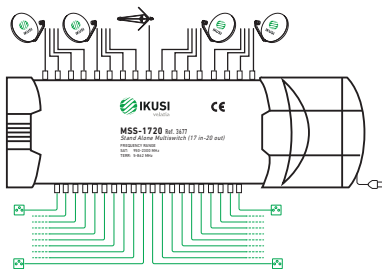


2 satellites and 32 users

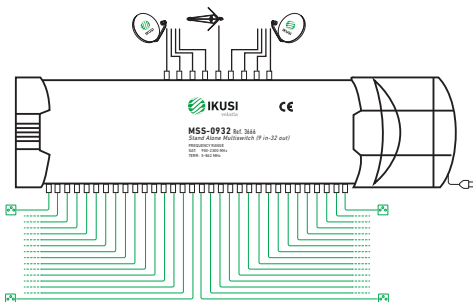


CASCADABLE

2 satellite and 50 users

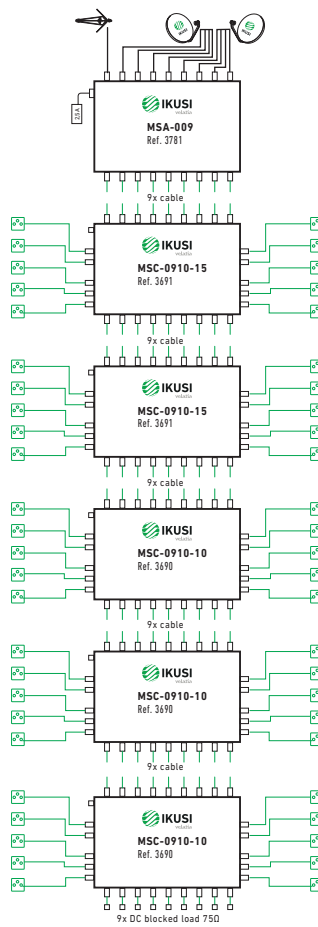

CASCADABLE

4 satellite and 120 users

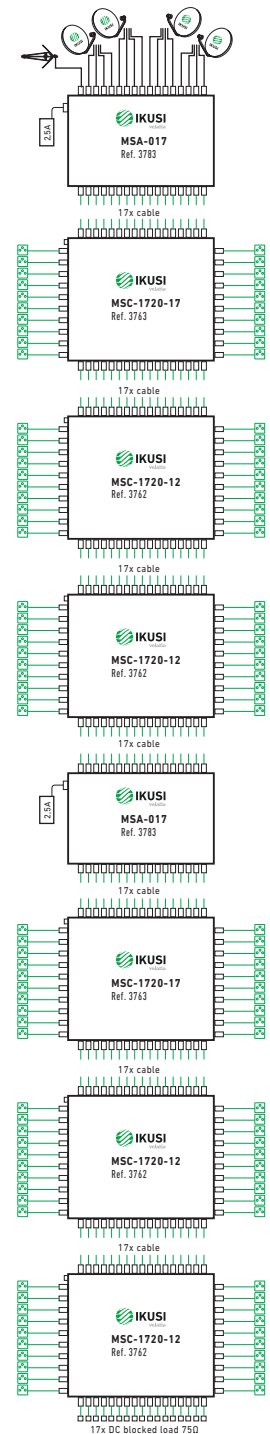

5 inputs. MSS series



All models with integrated power supply except MSS-0532 with external power supply

| MODEL | | MSS-0504 | MSS-0508 | MSS-0512 | MSS-0516 | MSS-0520 | MSS-0524 | MSS-0528 | MSS-0532 |
|--|--------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|---------------------------|
| REF. | | 3652 | 3653 | 3654 | 3655 | 3656 | 3657 | 3658 | 3659 |
| Number of inputs | | 5 (4 SAT inputs+1 TERR input) | | | | | | | |
| Number of outputs (users) | | 4 | 8 | 12 | 16 | 20 | 24 | 28 | 32 |
| Frequency range SAT | | MHz | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2150 |
| Frequency range | TERR active | MHz | 40 - 862 | 40 - 862 | 40 - 862 | 40 - 862 | 40 - 862 | 40 - 862 | 40 - 862 |
| | TERR passive | MHz | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 |
| Insertion loss SAT | | dB | 3 | 4 | 0 | 0 | 2 | 2 | 950 MHz= 8 ; 2150 MHz= +5 |
| Insertion loss | TERR active | dB | 2 | 3 | -7 | -6 | 10 | 10 | 5 |
| | TERR passive | dB | 19 | 20 | 21 | 22 | 23 | 24 | 27 |
| Isolation between V/H polarizations | | dB | 20 | 20 | 20 | 20 | 20 | 20 | - |
| Isolation between L/H bands | | dB | 25 | 25 | 25 | 25 | 25 | 25 | - |
| Maximum input level SAT | | dBμV | 90 | 90 | 90 | 90 | 90 | 90 | 85 |
| Max input level | TERR active | dBμV | 93 | 93 | 85 | 85 | 90 | 90 | 90 |
| | TERR passive | dBμV | 100 | 100 | 100 | 100 | 100 | 100 | 110 |
| Maximum output level SAT | | dBμV | 87 | 86 | 90 | 90 | 88 | 88 | 85 |
| Max output level | TERR active | dBμV | 91 | 90 | 92 | 91 | 80 | 80 | 85 |
| | TERR passive | dBμV | 81 | 80 | 79 | 78 | 77 | 76 | 83 |
| Current consumption from each receiver | | mA | 40 | 40 | 40 | 40 | 40 | 40 | 55 |
| Power supply consumption | TERR active | W | 6 | 6 | 9 | 9 | 5 | 5 | 9 |
| | TERR passive | W | 4 | 4 | 5 | 5 | 3.5 | 3.5 | 7 |
| Input voltage | | Vac | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 |
| Operating temperature | | °C | -30 ... +70 | -30 ... +70 | -30 ... +70 | -30 ... +70 | -30 ... +70 | -30 ... +70 | -25 ... +50 |
| Dimensions | | cm | 26.5 x 15.2 x 8.7 | 27.5 x 15.2 x 8.7 | 34.7 x 15.2 x 8.7 | 35.4 x 15.2 x 8.7 | 47.0 x 15.2 x 8.7 | 47.0 x 15.2 x 8.7 | 35.5 x 35 x 5 |

9 inputs. MSS series



All models with integrated power supply except MSS-0932 with external power supply

| MODEL | | MSS-0904 | MSS-0908 | MSS-0912 | MSS-0916 | MSS-0920 | MSS-0926 | MSS-0932 | |
|--|--------------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|---------------------------|--|
| REF. | | 3660 | 3661 | 3662 | 3663 | 3664 | 3665 | 3666 | |
| Number of inputs | | 9 (8 SAT inputs+1 TERR input) | | | | | | | |
| Number of outputs (users) | | 4 | 8 | 12 | 16 | 20 | 26 | 32 | |
| Frequency range SAT | | MHz | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2150 | |
| Frequency range | TERR active | MHz | 40 - 862 | 40 - 862 | 40 - 862 | 40 - 862 | 40 - 862 | 40 - 862 | |
| | TERR passive | MHz | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | |
| Insertion loss SAT | | dB | 0 | 0 | 0 | 0 | 4 | 950 MHz= 8 ; 2150 MHz= +5 | |
| Insertion loss | TERR active | dB | -3 | 0 | 3 | 5 | 7 | 8 | |
| | TERR passive | dB | 12 | 16 | 18 | 21 | 24 | 25 | |
| Isolation between V/H polarizations | | dB | 20 | 20 | 20 | 20 | 20 | 25 | |
| Isolation between L/H bands | | dB | 25 | 25 | 25 | 25 | 25 | 30 | |
| Maximum input level SAT | | dBμV | 90 | 90 | 90 | 90 | 90 | 85 | |
| Max input level | TERR active | dBμV | 90 | 90 | 90 | 90 | 90 | 90 | |
| | TERR passive | dBμV | 100 | 100 | 100 | 100 | 100 | 110 | |
| Maximum output level SAT | | dBμV | 90 | 90 | 90 | 90 | 86 | 85 | |
| Max output level | TERR active | dBμV | 93 | 90 | 87 | 85 | 83 | 82 | |
| | TERR passive | dBμV | 88 | 84 | 82 | 79 | 76 | 75 | |
| Current consumption from each receiver | | mA | 50 | 50 | 50 | 50 | 50 | 70 | |
| Power supply consumption | TERR active | W | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 13 | |
| | TERR passive | W | 3 | 3 | 3 | 3 | 3 | 11 | |
| Input voltage | | Vac | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 | |
| Operating temperature | | °C | -30 ... +70 | -30 ... +70 | -30 ... +70 | -30 ... +70 | -30 ... +70 | -25 ... +50 | |
| Dimensions | | cm | 34.7 x 15.2 x 8.7 | 34.7 x 15.2 x 8.7 | 34.7 x 15.2 x 8.7 | 35.4 x 15.2 x 8.7 | 47.0 x 15.2 x 8.7 | 35.5 x 35 x 5 | |

13 inputs. MSS series



All models with integrated power supply except MSS-1332 with external power supply

| MODEL | | MSS-1304 | MSS-1308 | MSS-1312 | MSS-1316 | MSS-1320 | MSS-1326 | MSS-1332 |
|--|-----------------------------|---------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|--------------------------------|
| REF. | | 3667 | 3668 | 3669 | 3670 | 3671 | 3672 | 3673 |
| Number of inputs | | 13 (12 SAT inputs+1 TERR input) | | | | | | |
| Number of outputs (users) | | 4 | 8 | 12 | 16 | 20 | 26 | 32 |
| Frequency range SAT | | MHz | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2150 |
| Frequency range | TERR active TERR passive | MHz | 40 - 862 5 - 862 | 40 - 862 5 - 862 | 40 - 862 5 - 862 | 40 - 862 5 - 862 | 40 - 862 5 - 862 | 40 - 862 5 - 862 |
| Insertion loss SAT | | dB | 0 | 0 | 0 | 0 | 4 | 5 950 MHz= 8 ; 2150 MHz= +5 |
| Insertion loss | TERR active TERR passive | dB | 0 12 | 2 16 | 5 19 | 7 21 | 9 24 | 10 25 27 |
| Isolation between V/H polarizations | | dB | 20 | 20 | 20 | 20 | 20 | 20 |
| Isolation between L/H bands | | dB | 25 | 25 | 25 | 25 | 25 | 25 |
| Maximum input level SAT | | dBμV | 90 | 90 | 90 | 90 | 90 | 85 |
| Max input level | TERR active TERR passive | dBμV | 90 100 | 90 100 | 90 100 | 90 100 | 90 100 | 90 110 |
| Maximum output level SAT | | dBμV | 90 | 90 | 90 | 90 | 86 | 85 |
| Max output level | TERR active TERR passive | dBμV | 90 88 | 88 84 | 85 81 | 83 79 | 81 76 | 80 75 83 |
| Current consumption from each receiver | | mA | 75 | 75 | 75 | 75 | 75 | 75 |
| Power supply consumption | TERR active TERR passive | W | 6.5 4.5 | 6.5 4.5 | 6.5 4.5 | 6.5 4.5 | 6.5 4.5 | 17 15 |
| Input voltage | | Vac | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 |
| Operating temperature | | °C | -30 ... +70 | -30 ... +70 | -30 ... +70 | -30 ... +70 | -30 ... +70 | -25 ... +50 |
| Dimensions | | cm | 47.0 x 15.2 x 8.7 | 47.0 x 15.2 x 8.7 | 47.0 x 15.2 x 8.7 | 47.0 x 15.2 x 8.7 | 47.0 x 15.2 x 8.7 | 35.5 x 35 x 5 |

17 inputs. MSS series



All models with integrated power supply except MSS-1732 with external power supply

| MODEL | | MSS-1708 | MSS-1712 | MSS-1716 | MSS-1720 | MSS-1726 | MSS-1732 |
|--|-----------------------------|---------------------------------|---------------------|---------------------|---------------------|---------------------|--------------------------------|
| REF. | | 3674 | 3675 | 3676 | 3677 | 3678 | 3679 |
| Number of inputs | | 17 (16 SAT inputs+1 TERR input) | | | | | |
| Number of outputs (users) | | 8 | 12 | 16 | 20 | 26 | 32 |
| Frequency range SAT | | MHz | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2150 |
| Frequency range | TERR active TERR passive | MHz | 40 - 862 5 - 862 | 40 - 862 5 - 862 | 40 - 862 5 - 862 | 40 - 862 5 - 862 | 40 - 862 5 - 862 |
| Insertion loss SAT | | dB | 0 | 0 | 0 | 4 | 5 950 MHz= 8 ; 2150 MHz= +5 |
| Insertion loss | TERR active TERR passive | dB | 2 16 | 5 19 | 7 21 | 9 24 | 10 25 27 |
| Isolation between V/H polarizations | | dB | 20 | 20 | 20 | 20 | 20 |
| Isolation between L/H bands | | dB | 25 | 25 | 25 | 25 | 25 |
| Maximum input level SAT | | dBμV | 90 | 90 | 90 | 90 | 85 |
| Max input level | TERR active TERR passive | dBμV | 90 100 | 90 100 | 90 100 | 90 100 | 90 110 |
| Maximum output level SAT | | dBμV | 90 | 90 | 90 | 86 | 85 |
| Max output level | TERR active TERR passive | dBμV | 90 84 | 85 81 | 83 79 | 81 76 | 80 75 83 |
| Current consumption from each receiver | | mA | 75 | 75 | 75 | 75 | 100 |
| Power supply consumption | TERR active TERR passive | W | 6.5 4.5 | 6.5 4.5 | 6.5 4.5 | 6.5 4.5 | 21 19 |
| Input voltage | | Vac | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 | 90 - 265 |
| Operating temperature | | °C | -30 ... +70 | -30 ... +70 | -30 ... +70 | -30 ... +70 | -25 ... +50 |
| Dimensions | | cm | 47.0 x 15.2 x 8.7 | 47.0 x 15.2 x 8.7 | 47.0 x 15.2 x 8.7 | 47.0 x 15.2 x 8.7 | 35.5 x 35 x 5 |

5 inputs. MSC series




| MODEL | | MSC-0504-05 | MSC-0504-10 | MSC-0508-05 | MSC-0508-10 | MSC-0512-05 | MSC-0512-10 | MSC-0516-05 | MSC-0516-10 |
|--|------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| REF. | | 3680 | 3681 | 3682 | 3683 | 3684 | 3685 | 3686 | 3687 |
| Number of inputs | | 5 (4 SAT inputs+1 TERR input) | | | | | | | |
| Number of outputs | | 5 | | | | | | | |
| Number of user outputs | | 4 | 4 | 8 | 8 | 12 | 12 | 16 | 16 |
| Frequency range SAT | MHz | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 | 950 - 2300 |
| Frequency range TERR | MHz | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 |
| Insertion loss SAT trunk | dB | 2 | 2 | 2 | 2 | 4 | 2 | 2 | 2 |
| Insertion loss TERR trunk | dB | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| Insertion loss SAT user | dB | 5 | 10 | 5 | 10 | 5 | 10 | 5 | 10 |
| Insertion loss TERR tap | dB | 18 | 21 | 21 | 24 | 24 | 27 | 25 | 28 |
| Isolation between V/H polarizations at user output | dB | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 |
| Isolation between bands L/H at user output | dB | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 |
| Isolation between trunk lines | dB | 30 | 30 | 30 | 30 | 25 | 25 | 25 | 25 |
| Maximum input level SAT | dBμV | 90 | 90 | 90 | 90 | 90 | 90 | 90 | 90 |
| Maximum input level TERR | dBμV | 110 | 110 | 110 | 110 | 110 | 110 | 110 | 110 |
| Maximum user output level SAT | dBμV | 85 | 85 | 85 | 80 | 85 | 80 | 85 | 80 |
| Maximum user output level TERR | dBμV | 92 | 89 | 89 | 86 | 86 | 83 | 85 | 82 |
| Current consumption from receiver (18V) | mA | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 |
| Operating temperature | °C | -26 ... +60 | -26 ... +60 | -26 ... +60 | -26 ... +60 | -26 ... +60 | -26 ... +60 | -26 ... +60 | -26 ... +60 |
| Dimensions (w x d x h) | cm | 12.7 x 10.4 x 4.1 | 12.7 x 10.4 x 4.1 | 13.5 x 10.4 x 4.1 | 13.5 x 10.4 x 4.1 | 13.5 x 10.4 x 4.1 | 13.5 x 10.4 x 4.1 | 13.5 x 10.4 x 4.1 | 13.5 x 10.4 x 4.1 |

9 inputs. MSC series



| MODEL | | MSC-0906-10 | MSC-0906-15 | MSC-0910-10 | MSC-0910-15 | MSC-0916-12 | MSC-0916-17 | MSC-0920-12 | MSC-0920-17 |
|--|------|-------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| REF. | | 3688 | 3689 | 3690 | 3691 | 3692 | 3693 | 3694 | 3695 |
| Number of inputs | | 9 (8 SAT inputs+1 TERR input) | | | | | | | |
| Number of outputs | | 9 | | | | | | | |
| Number of user outputs | | 6 | 6 | 10 | 10 | 16 | 16 | 20 | 20 |
| Frequency range SAT | MHz | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 |
| Frequency range TERR | MHz | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 |
| Insertion loss SAT trunk | dB | 2 | 2 | 2.5 | 2.5 | 3 | 3 | 3.5 | 3.5 |
| Insertion loss TERR trunk | dB | 3 | 3 | 4 | 4 | 7 | 7 | 8 | 8 |
| Insertion loss SAT user | dB | 10 | 15 | 10 | 15 | 12 | 17 | 12 | 17 |
| Insertion loss TERR tap | dB | 18 | 18 | 22 | 22 | 26 | 26 | 28 | 28 |
| Isolation between V/H polarizations at user output | dB | 22 | 22 | 22 | 22 | 20 | 20 | 20 | 20 |
| Isolation between bands L/H at user output | dB | 22 | 22 | 22 | 22 | 22 | 22 | 22 | 22 |
| Isolation between trunk lines | dB | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 |
| Maximum input level SAT | dBμV | 105 | 105 | 105 | 105 | 105 | 105 | 105 | 105 |
| Maximum input level TERR | dBμV | 105 | 105 | 105 | 105 | 105 | 105 | 105 | 105 |
| Maximum user output level SAT | dBμV | 95 | 90 | 95 | 90 | 93 | 88 | 93 | 88 |
| Maximum user output level TERR | dBμV | 87 | 87 | 83 | 83 | 79 | 79 | 77 | 77 |
| Current consumption from receiver (18V) | mA | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 |
| Operating temperature | °C | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 |
| Dimensions (w x d x h) | cm | 18.6 x 14.6 x 5.1 | 18.6 x 14.6 x 5.1 | 18.6 x 14.6 x 5.1 | 18.6 x 14.6 x 5.1 | 18.6 x 24.5 x 5.1 | 18.6 x 24.5 x 5.1 | 18.6 x 24.5 x 5.1 | 18.6 x 24.5 x 5.1 |

13 inputs. MSC series



| MODEL | | MSC-1306-10 | MSC-1306-15 | MSC-1310-10 | MSC-1310-15 | MSC-1316-12 | MSC-1316-17 | MSC-1320-12 | MSC-1320-17 |
|--|------|---------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| REF. | | 3696 | 3697 | 3698 | 3699 | 3752 | 3753 | 3754 | 3755 |
| Number of inputs | | 13 (12 SAT inputs+1 TERR input) | | | | | | | |
| Number of outputs | | 13 | | | | | | | |
| Number of user outputs | | 6 | 6 | 10 | 10 | 16 | 16 | 20 | 20 |
| Frequency range SAT | MHz | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 |
| Frequency range TERR | MHz | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 |
| Insertion loss SAT trunk | dB | 2 | 2 | 2.5 | 2.5 | 3 | 3 | 3.5 | 3.5 |
| Insertion loss TERR trunk | dB | 3 | 3 | 4 | 4 | 7 | 7 | 8 | 8 |
| Insertion loss SAT user | dB | 10 | 15 | 10 | 15 | 12 | 17 | 12 | 17 |
| Insertion loss TERR tap | dB | 18 | 18 | 22 | 22 | 26 | 26 | 28 | 28 |
| Isolation between V/H polarizations at user output | dB | 22 | 22 | 22 | 22 | 20 | 20 | 20 | 20 |
| Isolation between bands L/H at user output | dB | 22 | 22 | 22 | 22 | 22 | 22 | 22 | 22 |
| Isolation between trunk lines | dB | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 |
| Maximum input level SAT | dBμV | 105 | 105 | 105 | 105 | 105 | 105 | 105 | 105 |
| Maximum input level TERR | dBμV | 105 | 105 | 105 | 105 | 105 | 105 | 105 | 105 |
| Maximum user output level SAT | dBμV | 95 | 90 | 95 | 90 | 93 | 88 | 93 | 88 |
| Maximum user output level TERR | dBμV | 87 | 87 | 83 | 83 | 79 | 79 | 77 | 77 |
| Current consumption from receiver (18V) | mA | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| Operating temperature | °C | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 |
| Dimensions (w x d x h) | cm | 18.6 x 14.6 x 5.1 | 18.6 x 14.6 x 5.1 | 18.6 x 14.6 x 5.1 | 18.6 x 14.6 x 5.1 | 18.6 x 24.5 x 5.1 | 18.6 x 24.5 x 5.1 | 18.6 x 24.5 x 5.1 | 18.6 x 24.5 x 5.1 |

17 inputs. MSC series



| MODEL | | MSC-1706-10 | MSC-1706-15 | MSC-1710-10 | MSC-1710-15 | MSC-1716-12 | MSC-1716-17 | MSC-1720-12 | MSC-1720-17 |
|--|------|---------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| REF. | | 3756 | 3757 | 3758 | 3759 | 3760 | 3761 | 3762 | 3763 |
| Number of inputs | | 17 (16 SAT inputs+1 TERR input) | | | | | | | |
| Number of outputs | | 17 | | | | | | | |
| Number of user outputs | | 6 | 6 | 10 | 10 | 16 | 16 | 20 | 20 |
| Frequency range SAT | MHz | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 |
| Frequency range TERR | MHz | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 | 5 - 862 |
| Insertion loss SAT trunk | dB | 2 | 2 | 2.5 | 2.5 | 3 | 3 | 3.5 | 3.5 |
| Insertion loss TERR trunk | dB | 3 | 3 | 4 | 4 | 7 | 7 | 8 | 8 |
| Insertion loss SAT user | dB | 10 | 15 | 10 | 15 | 12 | 17 | 12 | 17 |
| Insertion loss TERR tap | dB | 18 | 18 | 22 | 22 | 26 | 26 | 28 | 28 |
| Isolation between V/H polarizations at user output | dB | 22 | 22 | 22 | 22 | 20 | 20 | 20 | 20 |
| Isolation between bands L/H at user output | dB | 22 | 22 | 22 | 22 | 22 | 22 | 22 | 22 |
| Isolation between trunk lines | dB | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 |
| Maximum input level SAT | dBμV | 105 | 105 | 105 | 105 | 105 | 105 | 105 | 105 |
| Maximum input level TERR | dBμV | 105 | 105 | 105 | 105 | 105 | 105 | 105 | 105 |
| Maximum user output level SAT | dBμV | 95 | 90 | 95 | 90 | 93 | 88 | 93 | 88 |
| Maximum user output level TERR | dBμV | 87 | 87 | 83 | 83 | 79 | 79 | 77 | 77 |
| Current consumption from receiver (18V) | mA | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| Operating temperature | °C | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 | -25 ... +60 |
| Dimensions (w x d x h) | cm | 18.6 x 14.6 x 5.1 | 18.6 x 14.6 x 5.1 | 18.6 x 14.6 x 5.1 | 18.6 x 14.6 x 5.1 | 18.6 x 24.5 x 5.1 | 18.6 x 24.5 x 5.1 | 18.6 x 24.5 x 5.1 | 18.6 x 24.5 x 5.1 |

Amplifiers MSA series



MSA-005



MSA-009



MSA-013



MSA-017

| MODEL | | MSA-005 | MSA-009 | MSA-013 | MSA-017 |
|-------------------------------|------------|-------------------------------|-------------------------------|---------------------------------|---------------------------------|
| REF. | | 3780 | 3781 | 3782 | 3783 |
| Number of inputs | | 5 (4 SAT inputs+1 TERR input) | 9 (8 SAT inputs+1 TERR input) | 13 (12 SAT inputs+1 TERR input) | 17 (16 SAT inputs+1 TERR input) |
| Number of outputs | | 5 | 9 | 13 | 17 |
| Frequency range SAT | MHz | 950 - 2150 | 950 - 2150 | 950 - 2150 | 950 - 2150 |
| Frequency range TERR | MHz | 40 - 862 | 40 - 862 | 40 - 862 | 40 - 862 |
| Gain SAT | dB | 10 - 15 | 25 | 25 | 25 |
| Gain TERR | dB | 10 - 15 | 22 | 22 | 22 |
| Isolation between trunk lines | dB | 25 | 25 | 25 | 25 |
| Maximum input level SAT | dB μ V | 103 - 98 | 90 | 90 | 90 |
| Maximum input level TERR | dB μ V | 99 - 94 | 85 | 85 | 85 |
| Maximum output level SAT | dB μ V | 113 | 115 | 115 | 115 |
| Maximum output level TERR | dB μ V | 109 | 107 | 107 | 107 |
| Current consumption | mA | 350 | 700 | 1100 | 1350 |
| DC supply voltage | Vdc | 9 - 20 | 12 | 12 | 12 |
| Operating temperature | °C | -30 ... +70 | -25 ... +50 | -25 ... +50 | -25 ... +50 |
| Dimensions (w x d x h) | cm | 12,7 x 10,4 x 4,1 | 18,6 x 14,6 x 5,5 | 18,6 x 14,6 x 5,5 | 18,6 x 14,6 x 5,5 |

Power supply not included in MSA-005 model

Power supply



| MODEL | | PSA-012 |
|------------------------|-----|--------------------|
| REF. | | 3784 |
| Input voltage | | 90-265 AC 50/60 Hz |
| Output voltage | Vdc | 12 |
| Maximal output current | A | 2 |
| Efficiency | % | 75 |
| Operating temperature | °C | -30 ... +50 |
| Dimensions | mm | 16 x 6,4 x 5 |

Splitters UDA series



UDA-505



UDA-500

| MODEL | UDA-505 | | UDA-500 | |
|---|-------------------------------|-------------------|-------------------------------|--|
| REF. | 3786 | | 3787 | |
| Number of inputs | 5 (4 SAT inputs+1 TERR input) | | 5 (4 SAT inputs+1 TERR input) | |
| Number of outputs | 10 | | 10 | |
| Frequency range SAT | MHz | 950 - 2300 | 950 - 2300 | |
| Frequency range TERR | MHz | 5 - 862 | 48 - 862 | |
| Insertion loss SAT | dB | 5 | -1 | |
| Insertion loss TERR | dB | 4 | -7 | |
| Isolation between trunks | dB | 35 | 35 | |
| Isolation between outputs of each SAT splitter | dB | 13 | 13 | |
| Isolation between outputs of each TERR splitter | dB | 7 | 13 | |
| Maximum input level SAT | dBμV | - | 94 | |
| Maximum input level TERR | dBμV | - | 92 | |
| Maximum output level SAT (trunk or split) | dBμV | - | 96 | |
| Maximum output level TERR (trunk or split) | dBμV | - | 100 | |
| Total current level SAT (tap) | mA | - | 115 | |
| Operating temperature | °C | -30 ... +70 | -30 ... +70 | |
| Dimensions (w x d x h) | cm | 13.5 x 10.4 x 4.1 | 13.5 x 10.4 x 4.1 | |

Power supply not included

F connectors



BCF-060



FMM-100

| MODEL | REF. | DESCRIPTION |
|---------|------|--|
| BCF-060 | 2379 | 60V AC/DC block type male-female F connector |
| FMM-100 | 3211 | Quick F connector male-female |

Indoor tap-offs. UDM series



1 output

| MODEL | | UDM-110 | UDM-115 | UDM-120 | UDM-125 | |
|-----------------------|---------------|---------|---------|---------|---------|-------|
| REF. | | 2052 | 2053 | 2054 | 2055 | |
| Outputs | | 1 | | | | |
| Tap loss (± 0.7 dB) | | dB | 10 | 15 | 20 | 25 |
| Through loss | 5-862 MHz | dB | ≤ 1.1 | ≤ 1.0 | ≤ 0.9 | ≤ 0.5 |
| | 950-2150 MHz | dB | ≤ 1.2 | ≤ 1.7 | ≤ 1.4 | ≤ 1.5 |
| | 2150-2400 MHz | dB | ≤ 2.8 | ≤ 2.8 | ≤ 2.7 | ≤ 2.7 |
| Directional isolation | 5-300 MHz | dB | ≥ 29 | ≥ 28 | ≥ 31 | ≥ 38 |
| | 301-862 MHz | dB | ≥ 29 | ≥ 27 | ≥ 28 | ≥ 35 |
| | 950-2400 MHz | dB | ≥ 19 | ≥ 23 | ≥ 19 | ≥ 24 |

2 outputs

| MODEL | | UDM-210 | UDM-215 | UDM-220 | UDM-225 | |
|-----------------------|---------------|---------|---------|---------|---------|-------|
| REF. | | 2056 | 2057 | 2058 | 2059 | |
| Outputs | | 2 | | | | |
| Tap loss (± 0.7 dB) | | dB | 10 | 15 | 20 | 25 |
| Through loss | 5-862 MHz | dB | ≤ 2.3 | ≤ 1.6 | ≤ 1.1 | ≤ 1.1 |
| | 950-2150 MHz | dB | ≤ 3.5 | ≤ 2.5 | ≤ 2.2 | ≤ 2.3 |
| | 2150-2400 MHz | dB | ≤ 4 | ≤ 3.5 | ≤ 3.3 | ≤ 3.3 |
| Directional isolation | 5-300 MHz | dB | ≥ 26 | ≥ 29 | ≥ 31 | ≥ 35 |
| | 301-862 MHz | dB | ≥ 26 | ≥ 27 | ≥ 29 | ≥ 32 |
| | 950-2400 MHz | dB | ≥ 20 | ≥ 22 | ≥ 26 | ≥ 28 |
| Tap-to-tap isolation | 5-300 MHz | dB | ≥ 38 | ≥ 39 | ≥ 46 | ≥ 50 |
| | 301-862 MHz | dB | ≥ 35 | ≥ 37 | ≥ 42 | ≥ 45 |
| | 950-2400 MHz | dB | ≥ 28 | ≥ 37 | ≥ 39 | ≥ 35 |

4 outputs

| MODEL | | UDM-410 | UDM-415 | UDM-420 | UDM-425 | |
|-----------------------|---------------|---------|---------|---------|---------|-------|
| REF. | | 2060 | 2061 | 2062 | 2063 | |
| Outputs | | 4 | | | | |
| Tap loss (± 1dB) | | dB | 10 | 15 | 20 | 25 |
| Through loss | 5-862 MHz | dB | ≤ 4.0 | ≤ 1.9 | ≤ 0.9 | ≤ 0.6 |
| | 950-2150 MHz | dB | ≤ 4.8 | ≤ 3.5 | ≤ 2.8 | ≤ 2.8 |
| | 2150-2400 MHz | dB | ≤ 5.3 | ≤ 4.2 | ≤ 3.9 | ≤ 3.4 |
| Directional isolation | 5-300 MHz | dB | ≥ 35 | ≥ 30 | ≥ 37 | ≥ 37 |
| | 301-862 MHz | dB | ≥ 33 | ≥ 30 | ≥ 33 | ≥ 37 |
| | 950-2400 MHz | dB | ≥ 29 | ≥ 23 | ≥ 25 | ≥ 27 |
| Tap-to-tap isolation | 5-300 MHz | dB | ≥ 29 | ≥ 30 | ≥ 29 | ≥ 30 |
| | 301-862 MHz | dB | ≥ 26 | ≥ 28 | ≥ 26 | ≥ 26 |
| | 950-2400 MHz | dB | ≥ 24 | ≥ 28 | ≥ 24 | ≥ 26 |

6 outputs

| MODEL | | UDM-615 | UDM-620 | UDM-625 | |
|-----------------------|---------------|---------|---------|---------|-------|
| REF. | | 2064 | 2065 | 2066 | |
| Outputs | | 6 | | | |
| Tap loss (± 1dB) | | dB | 15 | 20 | 25 |
| Through loss | 5-862 MHz | dB | ≤ 4.8 | ≤ 4.8 | ≤ 3.2 |
| | 950-2150 MHz | dB | ≤ 5.7 | ≤ 4.8 | ≤ 3.8 |
| | 2150-2400 MHz | dB | ≤ 7 | ≤ 5 | ≤ 4.3 |
| Directional isolation | 5-300 MHz | dB | ≥ 30 | ≥ 37 | ≥ 37 |
| | 301-862 MHz | dB | ≥ 30 | ≥ 33 | ≥ 37 |
| | 950-2400 MHz | dB | ≥ 23 | ≥ 25 | ≥ 27 |
| Tap-to-tap isolation | 5-300 MHz | dB | ≥ 30 | ≥ 29 | ≥ 30 |
| | 301-862 MHz | dB | ≥ 28 | ≥ 26 | ≥ 26 |
| | 950-2400 MHz | dB | ≥ 28 | ≥ 24 | ≥ 26 |

8 outputs

| MODEL | | UDM-815 | UDM-820 | UDM-825 | |
|-----------------------|---------------|---------|---------|---------|-------|
| REF. | | 2067 | 2068 | 2069 | |
| Outputs | | 8 | | | |
| Tap loss (± 1dB) | | dB | 16 | 20 | 25 |
| Through loss | 5-862 MHz | dB | ≤ 4.3 | ≤ 2.4 | ≤ 2.2 |
| | 950-2150 MHz | dB | ≤ 5.8 | ≤ 5 | ≤ 3.3 |
| | 2150-2400 MHz | dB | ≤ 6 | ≤ 5.5 | ≤ 4.6 |
| Directional isolation | 5-300 MHz | dB | ≥ 30 | ≥ 30 | ≥ 33 |
| | 301-862 MHz | dB | ≥ 30 | ≥ 30 | ≥ 36 |
| | 950-2400 MHz | dB | ≥ 27 | ≥ 23 | ≥ 28 |
| Tap-to-tap isolation | 5-300 MHz | dB | ≥ 34 | ≥ 30 | ≥ 30 |
| | 301-862 MHz | dB | ≥ 32 | ≥ 28 | ≥ 28 |
| | 950-2400 MHz | dB | ≥ 25 | ≥ 28 | ≥ 28 |

Indoor splitters. UDF series

TV-IF combiner




| MODEL | | UDF-205 | UDF-307 | UDF-408 | UDF-612 | UDF-813 | |
|------------------|---------------|---------|---------|---------|---------|---------|--------|
| REF. | | 2075 | 2076 | 2077 | 2078 | 2079 | |
| No. of ways | | 2 | 3 | 4 | 6 | 8 | |
| Insertion loss | 5-862 MHz | dB | ≤ 3.6 | ≤ 6.8 | ≤ 8.1 | ≤ 11.8 | ≤ 11.9 |
| | 950-1550 MHz | | ≤ 4.1 | ≤ 8.5 | ≤ 9.1 | ≤ 13.5 | ≤ 14.1 |
| | 1551-2150 MHz | | ≤ 4.5 | ≤ 9.7 | ≤ 10.4 | ≤ 15.1 | ≤ 15.8 |
| | 2151-2400 MHz | | ≤ 6 | ≤ 10.1 | ≤ 11 | ≤ 15.1 | ≤ 17 |
| Output isolation | 5-300 MHz | dB | ≥ 35 | ≥ 25 | ≥ 24 | ≥ 28 | ≥ 26 |
| | 301-862 MHz | | ≥ 34 | ≥ 25 | ≥ 22 | ≥ 25 | ≥ 28 |
| | 950-2400 MHz | | ≥ 20 | ≥ 21 | ≥ 22 | ≥ 25 | ≥ 28 |

| MODEL | | DMS-300 |
|----------------------------|----|---|
| REF. | | 3372 |
| RF inputs | | 3 TV (5-862 MHz) ; IF-1 (950-2150 MHz) ; IF-2 (950-2150 MHz) |
| RF outputs | | 2 TV + IF-1 TV + IF-2 |
| Insertion loss | dB | TV: ≤ 4 ,, IF-1/IF-2: ≤ 2 |
| Input isolation | dB | ≥ 25 |
| Power passing to IF inputs | | Yes (18V/500 mA max) |
| Dimensions | mm | 122 x 45 x 20 |

CATV indoor tap-offs DFC series


CATV indoor splitters DFC series



| MODEL | | DFC-410 | DFC-415 | DFC-420 | DFC-425 | |
|---------------------------|--------------|---------|---------|---------|---------|-------|
| REF. | | 2086 | 2087 | 2088 | 2089 | |
| Outputs | | 4 | | | | |
| Frequency range | | MHz | 5-1000 | | | |
| Tap loss (± 1.5 dB) | | dB | 10 | 16 | 20 | 24 |
| Through loss | 5-30 MHz | dB | ≤ 3.5 | ≤ 1.8 | ≤ 1.0 | ≤ 1.0 |
| | 30-470 MHz | | ≤ 3.6 | ≤ 1.8 | ≤ 1.1 | ≤ 0.8 |
| | 470-1000 MHz | | ≤ 4.5 | ≤ 2.5 | ≤ 1.5 | ≤ 1.2 |
| Directional isolation | 5-30 MHz | dB | ≥ 28 | ≥ 30 | ≥ 30 | ≥ 30 |
| | 30-470 MHz | | ≥ 27 | ≥ 28 | ≥ 28 | ≥ 28 |
| | 470-1000 MHz | | ≥ 25 | ≥ 25 | ≥ 25 | ≥ 25 |
| Isolation between outputs | 5-30 MHz | dB | ≥ 30 | ≥ 36 | ≥ 40 | ≥ 45 |
| | 30-470 MHz | | ≥ 28 | ≥ 32 | ≥ 33 | ≥ 33 |
| | 470-1000 MHz | | ≥ 25 | ≥ 27 | ≥ 27 | ≥ 30 |
| Return loss | 5-30 MHz | dB | ≥ 21 | ≥ 22 | ≥ 22 | ≥ 22 |
| | 30-470 MHz | | ≥ 20 | ≥ 20 | ≥ 20 | ≥ 20 |
| | 470-1000 MHz | | ≥ 17 | ≥ 17 | ≥ 17 | ≥ 17 |

| MODEL | | DFC-201 | |
|------------------|--------------|---------|--------|
| REF. | | 2081 | |
| Outputs | | 2 | |
| Frequency range | | MHz | 5-1000 |
| Insertion loss | 5-30 MHz | dB | ≤ 3.5 |
| | 30-470 MHz | | ≤ 3.6 |
| | 470-1000 MHz | | ≤ 4 |
| Output isolation | 5-30 MHz | dB | ≥ 30 |
| | 30-470 MHz | | ≥ 30 |
| | 470-1000 MHz | | ≥ 28 |
| Return loss | 5-30 MHz | dB | ≥ 21 |
| | 30-470 MHz | | ≥ 21 |
| | 470-1000 MHz | | ≥ 20 |

Outlets ARTU series Nuevo

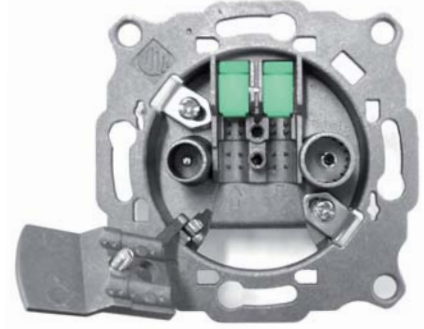

- Filtered outlet sockets for individual or cascade assembly.
- Fast clamping of the cable thanks to the swivel flange.
- Easy connection using the system to insert live product.

- Minimum current losses.
- Current flow through the C2 connector, SAT output.
- Compatible with the main wall-covering plates on the market.

MATV installation

| MODEL | | ARTU008 | | ARTU081 | |
|--------------------|-----|--------------------------|------------|-----------|--|
| REF. | | 2574 | | 2576 | |
| Installation | | End | | | |
| Type | | Bridget | | Resistive | |
| Connector | | C1 | IEC male | | |
| | | C2 | IEC female | | |
| Frequency range | MHz | C1 | 5 - 862 | 5 - 1000 | |
| | | C2 | | | |
| Transfer loss | dB | TV | < 1.5 | < 3 | |
| | | RD | < 1.5 | < 10 | |
| Isolation C1-C2 | dB | TV | - | < 15 | |
| | | RD | - | < 15 | |
| Return losses | dB | TV | - | > 10 | |
| | | RD | - | > 10 | |
| Fixing hooks | | Yes | | | |
| Pieces / Packaging | ud | 10 / 100 | | | |
| Packed weight | kg | 0.872 / 9.5 | | | |
| Packing dimensions | mm | 170x70x130 / 780x160x180 | | | |

SMATV installation

| MODEL | | ARTU088 | | ARTU068 | |
|--------------------|------|--------------------------|------------|---------|--|
| REF. | | 2570 | | 2571 | |
| Installation | | Single | | | |
| Type | | Filtered | | | |
| Connector | | C1 | IEC male | | |
| | | C2 | IEC female | | |
| Frequency range | MHz | C1 | 5 - 862 | 5 - 694 | |
| | | C2 | 950 - 2400 | | |
| Transfer loss | dB | TV+RD | < 1 | | |
| | | SAT | < 1.5 | | |
| Isolation C1-C2 | dB | TV+RD | > 25 | | |
| | | SAT | > 25 | | |
| Selectivity | dB | TV+RD | > 15 | > 20 | |
| | | SAT | > 15 | > 20 | |
| Return losses | dB | TV+RD | > 10 | | |
| | | SAT | > 6 | | |
| DC transit C2 | Vdc | 24 | | | |
| | mA | 500 | | | |
| | Tono | 22 kHz / DiSEqC | | | |
| Fixing hooks | | Yes | No | | |
| Pieces / Packaging | ud | 10 / 100 | | | |
| Packed weight | kg | 0.872 / 9.5 | | | |
| Packing dimensions | mm | 170x70x130 / 780x160x180 | | | |






SMATV installation

| MODEL | | PSE-300 | |
|----------------------------|-----|--|--------------------------|
| REF. | | 5360 | |
| Type | | End | |
| Connectors | | C1 | IEC male |
| | | C2 | IEC female |
| | | C3 | F |
| Frequency range | MHz | C1 | TV: 5 - 68 and 125 - 862 |
| | | C2 | RD: 88 - 108 |
| | | C3 | SAT: 950 - 2300 |
| Insertion loss | dB | TV | ≤ 2 |
| | | RD | ≤ 2 |
| | | SAT | ≤ 3 |
| TV-RD and TV-SAT isolation | dB | > 18 | |
| SAT-RD isolation | dB | > 18 | |
| DC transit (C3) | dB | Yes | |
| Coverplate + Frame | | Yes | |
| Units / Packaging | ud | 1 / 58 | |
| Packed weight | kg | 1 ud: 0.169 / 58 uds: 9.8 | |
| Packing dimensions | mm | 1 ud: 48 x 80 x 80 / 58 uds: 400 x 295 x 245 | |

PSE-300



Ejemplos de aplicación para bases de toma ARTU

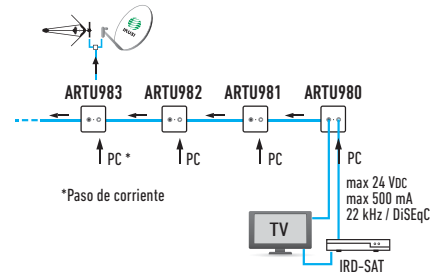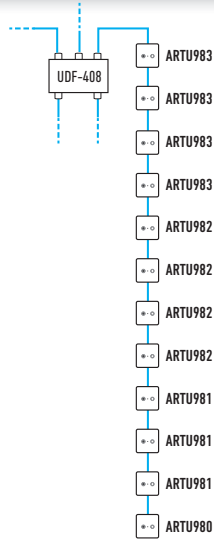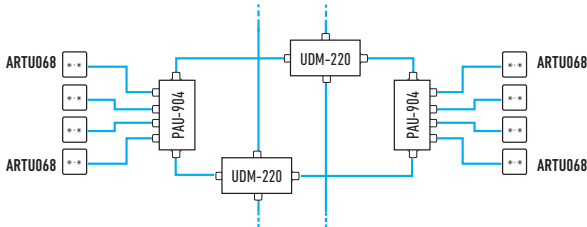

SMATV installation

| MODEL | | ARTU980 | ARTU981 | ARTU982 | ARTU983 | |
|--------------------|------|--------------------------|----------------------|--------------|--------------|-------|
| REF. | | 2578 | 2579 | 2580 | 2575 | |
| Installation | | End | Intermediate | Intermediate | Intermediate | |
| Type | | Inductive | | | | |
| Connector | | C1 | IEC male | | | |
| | | C2 | IEC female | | | |
| Frequency range | MHz | C1 | 5 - 862 / 950 - 2400 | | | |
| | | C2 | | | | |
| Transfer loss | dB | TV | < 4,5 in C1 | < 9 | < 13 | < 20 |
| | | SAT | < 6 in C2 | < 10 | < 14 | < 24 |
| Through loss | dB | TV | - | < 2 | < 1.2 | < 0.5 |
| | | SAT | - | < 3 | < 2 | < 1,2 |
| Isolation C1-C2 | dB | TV | > 16 | > 25 | > 25 | > 25 |
| | | SAT | | | | |
| Selectivity | dB | TV | - | | | |
| | | SAT | | | | |
| Return losses | dB | TV | > 10 | | | |
| | | SAT | > 6 | | | |
| DC transit C2 | Vdc | 24 | | | | |
| | mA | 500 | | | | |
| | Tono | 22 kHz / DiSEqC | | | | |
| Fixing hooks | | Yes | | | | |
| Pieces / Packaging | ud | 10 / 100 | | | | |
| Packed weight | kg | 0.872 / 9.5 | | | | |
| Packing dimensions | mm | 170x70x130 / 780x160x180 | | | | |

CATV Installation

| MODEL | | ARTU111 | |
|--------------------|-----|--------------------------|---------------------|
| REF. | | 2573 | |
| Installation | | Single | |
| Type | | Filtered | |
| Connector | | C1 | IEC male |
| | | C2 | IEC female |
| Frequency range | MHz | C1 | 5 - 68 / 118 - 1000 |
| | | C2 | 88 - 108 |
| Transfer loss | dB | TV | < 0.5 |
| | | RD | < 3 |
| Isolation C1-C2 | dB | TV | > 10 |
| | | RD | |
| Selectivity | dB | TV | > 15 |
| | | RD | |
| Return losses | dB | TV | > 15 |
| | | RD | |
| Fixing hooks | | Yes | |
| Pieces / Packaging | ud | 10 / 100 | |
| Packed weight | kg | 0.872 / 9.5 | |
| Packing dimensions | mm | 170x70x130 / 780x160x180 | |

Coverplates

| MODEL | | PBT-980 | PBT-990 | PBT-480 |
|--------------------|------|---------------------------|-------------|--------------------|
| REF. | | 2488 | 2489 | 2490 |
| Description | | TV-SAT - TV-SAT | TV+RD - SAT | TV - RD |
| For outlet | Ref. | 2578 ; 2579 ; 2580 ; 2575 | 2570 ; 2571 | 2574 ; 2576 ; 2573 |
| Pieces / Packaging | ud | 10 | | |
| Packed weight | kg | 0.172 | | |
| Packing dimensions | mm | 104 x 85 x 80 | | |

Accessories

| MODEL | ABT-210 |
|-------|---------|
| REF. | 1460 |


Mounting of the outlets without embedding the body in the wall




Cables coaxiales Nuevo

• Cables con mayor % de MALLA mejorando el apantallamiento y la conectorización.

• Cables con el VIVO más grueso mejorando la propagación eléctrica de la señal y dándoles mayor robustez.

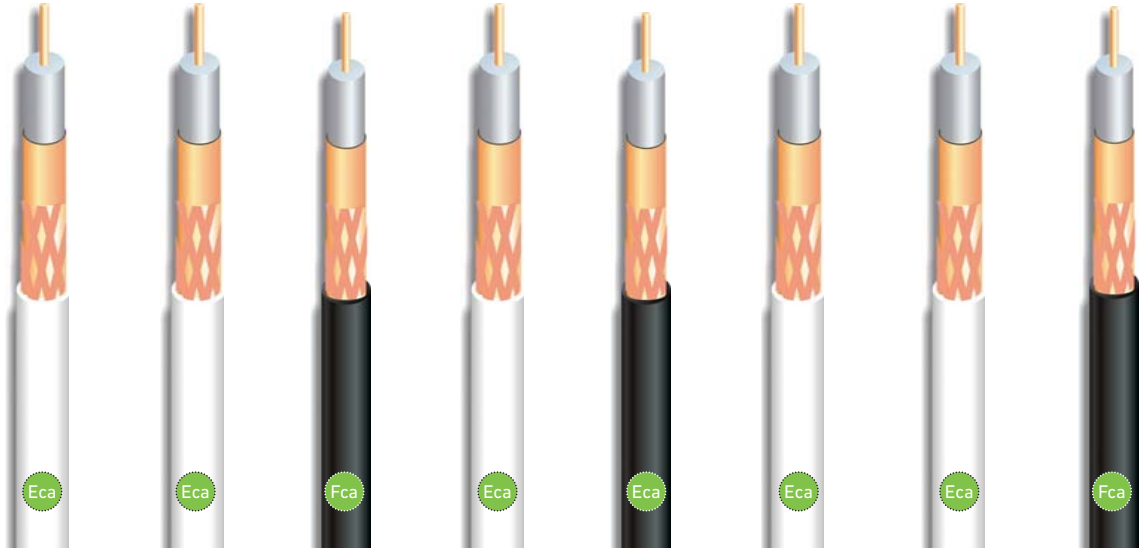

| MODEL | CUC-440 | CUC-442 | CUC-444 | CUC-340 | CUC-347 | CUA-340 | CUA-342 | CUA-344 |
|--------------------------|------------------------|------------------------|-----------------------|------------------------|-----------------------|------------------------|------------------------|-----------------------|
| REF. | 2566 | 2565 | 2564 | 2563 | 2559 | 2557 | 2556 | 2555 |
| Standard | EN 50117-2-4 | EN 50117-2-4 | EN 50117-2-5 | EN 50117-2-4 | EN 50117-2-4 | EN 50117-2-4 | EN 50117-2-4 | EN 50117-2-4 |
| RG | RG6 | RG6 | RG6 | RG6 | RG6 | RG6 | RG6 | RG6 |
| Indoor / Outdoor | Indoor | Indoor | Outdoor | Indoor | Indoor | Indoor | Indoor | Outdoor |
| CPR Euroclass | Eca | Eca | Fca | Eca | Eca | Eca | Eca | Fca |
| Screening Class | Class A | Class A | Class A | Class B | Class B | Class B | Class B | Class B |
| Inner conductor Diameter | Cu 1.13 | Cu 1.13 | Cu 1.13 | Cu 1.02 | Cu 1.02 | Cu 1.02 | Cu 1.02 | Cu 1.02 |
| Dielectric Diameter | mm PE 4.8 | mm PE 4.8 | mm PE 4.8 | mm PE 4.8 | mm PE 4.8 | mm PE 4.8 | mm PE 4.8 | mm PE 4.8 |
| Foil Braid | Cu Cu | Cu Cu | Cu Cu | Cu Cu | Cu Cu | Cu CCA (85%) | Cu CCA (85%) | Cu CCA (85%) |
| Number of wires | 128 | 128 | 128 | 96 | 96 | 128 | 128 | 128 |
| Outer sheath Diameter | mm PVC white 6.8 | mm PVC white 6.8 | mm PE black 6.8 | mm PVC white 6.8 | mm PVCblack 6.8 | mm PVC white 6.8 | mm PVC white 6.8 | mm PE Black 6.8 |
| Attenuation/100m | | | | | | | | |
| 5 MHz | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| 50 MHz | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 |
| 200 MHz | 8.5 | 8.5 | 8.5 | 8.5 | 8.5 | 8.5 | 8.5 | 8.5 |
| 300 MHz | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 | 10.5 |
| 470 MHz | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 |
| 862 MHz | 17.4 | 17.4 | 17.4 | 17.4 | 17.4 | 17.4 | 17.4 | 17.4 |
| 1000 MHz | 19.6 | 19.6 | 19.6 | 19.6 | 19.6 | 19.6 | 19.6 | 19.6 |
| 1750 MHz | 26.1 | 26.1 | 26.1 | 26.1 | 26.1 | 26.1 | 26.1 | 26.1 |
| 2150 MHz | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 |
| Dimensions (cm) | 55.5x28x27.5 | 28x28x28 | 55.5x28x27.5 | 55.5x28x27.5 | 55.5x28x27.5 | 55.5x28x27.5 | 28x28x28 | 55.5x28x27.5 |
| Packed weight (kg) | 22 | 14.5 | 18 | 21 | 21 | 20 | 13.5 | 16.5 |
| Supply in reel | 4x100m | 1x250m | 4x100m | 4x100m | 4x100m | 4x100m | 1x250m | 4x100m |



Legend

| | | | |
|-----|-----------------|--------|---|
| Cu | Copper | PE | Polyethylene |
| Al | Aluminum | PET | Polyester |
| CCS | Copper steel | PVC UV | Polyvinyl chloride against ultraviolet rays |
| CCA | Copper aluminum | | |

Cables coaxiales Nuevo



| CCH-175 | CUL-440 | CUL-443 | CSL-555 | CSL-444 | CSL-449 | CSL-134 | CCT-125 | 17VATCAPH1 | CSL-443 |
|-----------------------------------|------------------|------------------|----------------------|---------------------|---------------------|---------------------|--------------------|--------------------|------------------|
| 2506 | 2495 | 2494 | 2553 | 2552 | 2554 | 2551 | 2514 | 2493 | 2550 |
| EN50117-2-4 | EN 50117-2-4 | EN 50117-2-4 | EN 50117-2-1 | EN 50117-2-1 | EN 50117-2-1 | EN 50117-2-1 | EN50117-2-5 | EN50117-2-4 | EN 50117-2-4 |
| RG6 | RG6 | RG6 | RG11 | RG6 | RG6 | RG59 | RG11 | RG6 | RG6 |
| Indoor | Indoor | Indoor / Outdoor | Indoor / Outdoor | Indoor / Outdoor | Indoor / Outdoor | Outdoor | Indoor | Indoor | Indoor |
| Eca | Eca | Eca | Eca | Eca | Eca | Eca | Fca | Eca | Eca |
| Class B | Class B | Class B | Class A | Class A | Class A | Class A | Class B | Class B | Class B |
| Cu 1.13 | Cu 1.13 | Cu 1.13 | CCS 1.63 | CCS 1.13 | CCS 1.13 | CCS 0.8 | Cu 1.6 | CCS 1.13 | CCS 1.13 |
| PE 4.8 | PE 4.8 | PE 4.8 | PE 7.2 | PE 4.8 | PE 4.8 | PE 3.7 | PE 7.1 | PE 4.8 | PE 4.8 |
| Cu Cu | Al Al | Al Al | Al / Pet / Al Al | Al / Pet / Al Al | Al / Pet / Al Al | Al / Pet / Al Al | Al Al | Al Al | Al Al |
| 48 | 96 | 96 | 112 | 112 | 112 | 112 | 96 | 80 | 80 |
| Poliyolefin black LSZH* 6.8 | PVC white 6.9 | PVC white 6.9 | PVC UV black 10.1 | PVC UV white 6.9 | PVC UV black 6.9 | PVC UV white 6.0 | PE black 10 | PVC white 6.8 | PVC white 6.8 |
| 1.7 | 1.5 | 1.5 | 1.3 | 1.9 | 1.9 | 2.8 | 1.0 | 1.9 | 1.9 |
| 4.5 | 5.0 | 5.0 | 3.5 | 5.5 | 5.5 | 6.5 | 3.1 | 5.5 | 5.5 |
| 8.4 | 9.0 | 9.0 | 6.0 | 9.5 | 9.5 | 12.0 | 6.2 | 9.5 | 9.5 |
| 10.3 | 10.9 | 10.9 | 7.5 | 11.0 | 11.0 | 14.5 | 7.3 | 11.0 | 11.0 |
| 12.8 | 14.0 | 14.0 | 9.5 | 14.0 | 14.0 | 18.5 | 9.2 | 14.0 | 14.0 |
| 17.0 | 19.0 | 19.0 | 12.5 | 19.0 | 19.0 | 24.0 | 13.3 | 19.0 | 19.0 |
| 19.2 | 21.0 | 21.0 | 14.5 | 21.0 | 21.0 | 27.5 | 14.2 | 21.0 | 21.0 |
| 25.7 | 28.0 | 28.0 | 18.0 | 27.5 | 27.5 | 36.0 | 19.5 | 27.5 | 27.5 |
| 28.1 | 31.0 | 31.0 | 20.0 | 30.0 | 30.0 | 40.0 | 21.6 | 30.0 | 30.0 |
| 55.5x28x27.5 19.5 | 30x30x30 15 | 38x38x30 18.5 | 55.5x28x27.5 18.5 | 55.5x28x27.5 16 | 55.5x28x27.5 16 | 38x38x30 15.5 | 55.5x28x27.5 20 | 55.5x28x27.5 18 | 30x30x30 15 |
| 4x100m | 4x100m | 1x300m | 200m | 4x100m | 4x100m | 4x100m | 1x200m | 4x100m | 1x300m |

* LSZH: Low Smoke Zero Halogen. Outer sheath of the CCH-175 does not contain halogens. It is flame retardant (EN/IEC 60332-3), the density of the smoke produced when the cable is burnt is very low (EN/IEC 61034-2) and the fumes are nontoxic (IEC 60754-2).

Connectors



CFR-680



CAD



CHD-950



CCF-111



CFC-600



CFC-590



CTF-125



CTF-190



FMM-100



BCF-060



CTF-075



FAV-020



AV-020



V-2T



SAI-311



IFC-215



FIS-950



FAV-920



UCF-170




UCR-600

| REF. | MODEL | DESCRIPTION |
|------|---------|---|
| 2377 | CFR-680 | F male connector, screw-on plug for RG6 cables |
| 1502 | CAD | IEC male connector, elbow plug for RG6 and RG59 cables |
| 1503 | CHD-950 | IEC female connector, elbow plug for RG6 and RG59 cables |
| 3133 | CCF-111 | Compression connector, F male for RG11 cables |
| 3131 | CFC-600 | Compression connector, F male for RG6 cables |
| 2380 | CFC-590 | Compression connector, F male for RG59 cables |
| 2513 | CTF-125 | Crimp connector, F male for RG11 cables |
| 2368 | CTF-190 | Crimp connector, F male for RG6 cables |
| 2379 | BCF-060 | 60V AC/DC block F type male-female connector |
| 2221 | CTF-075 | Charge 75Ω. For loading an F port. Nickered brass |
| 1640 | SAI-311 | F type adapter. Female-female nickered brass |
| 3105 | FAV-020 | F type Attenuator 75Ω. Variable 0-20 dB in VHF/UHF. Constant impedance. F-M |
| 1674 | AV-020 | Attenuator variable 0-20 dB in VHF-UHF. Constant impedance. F-M. 9,5 mm Ø |
| 1408 | V-2T | 2 way splitters / 2 input combiners. Insertion loss: ≤ 4dB |
| 3241 | IFC-215 | Power inserter (1A/24 V). Frequency range: 10-2150 MHz. Insertion loss: ≤ 1 dB |
| 1107 | FIS-950 | 950-2150 MHz IF amplifier. Sloped gain: 12 up to 20 dB. Noise figure: 7 dB. Operating voltage: +15 ... +18 VDC. Consumption: 40 mA |
| 3242 | FAV-920 | 18 dB variable attenuator. Min attenuation: ≤ 1.5 dB (5-1000 MHz) and ≤ 4 dB(1001-2150 MHz). DC by-pass. F type male-female connectors. Dimensions: 51 x 49 x 22 mm |
| 3211 | FMM-100 | Quick connector F male-male |
| | UCF-170 | Útil de crimpar para conectores CTF-125 y CTF-190 |
| 1847 | UCF-170 | Hex crimp tool for CTF-125 and CTF-190 connectors |
| 3132 | UCR-600 | Compression tool for CCF-111, CFC-600 and CFC-590 connectors |

DISTRIBUTION

TV and SAT star distribution example



AMPLIFICATION HEADEND

SZB+550

UDM TAPS


- Floors
- 10 UDM-425
 - 9 UDM-425
 - 8 UDM-420
 - 7 UDM-420
 - 6 UDM-420
 - 5 UDM-420
 - 4 UDM-415
 - 3 UDM-415
 - 2 UDM-415
 - 1 UDM-410

UDF SPLITTERS

UDF-408

OUTLETS

ARTU088

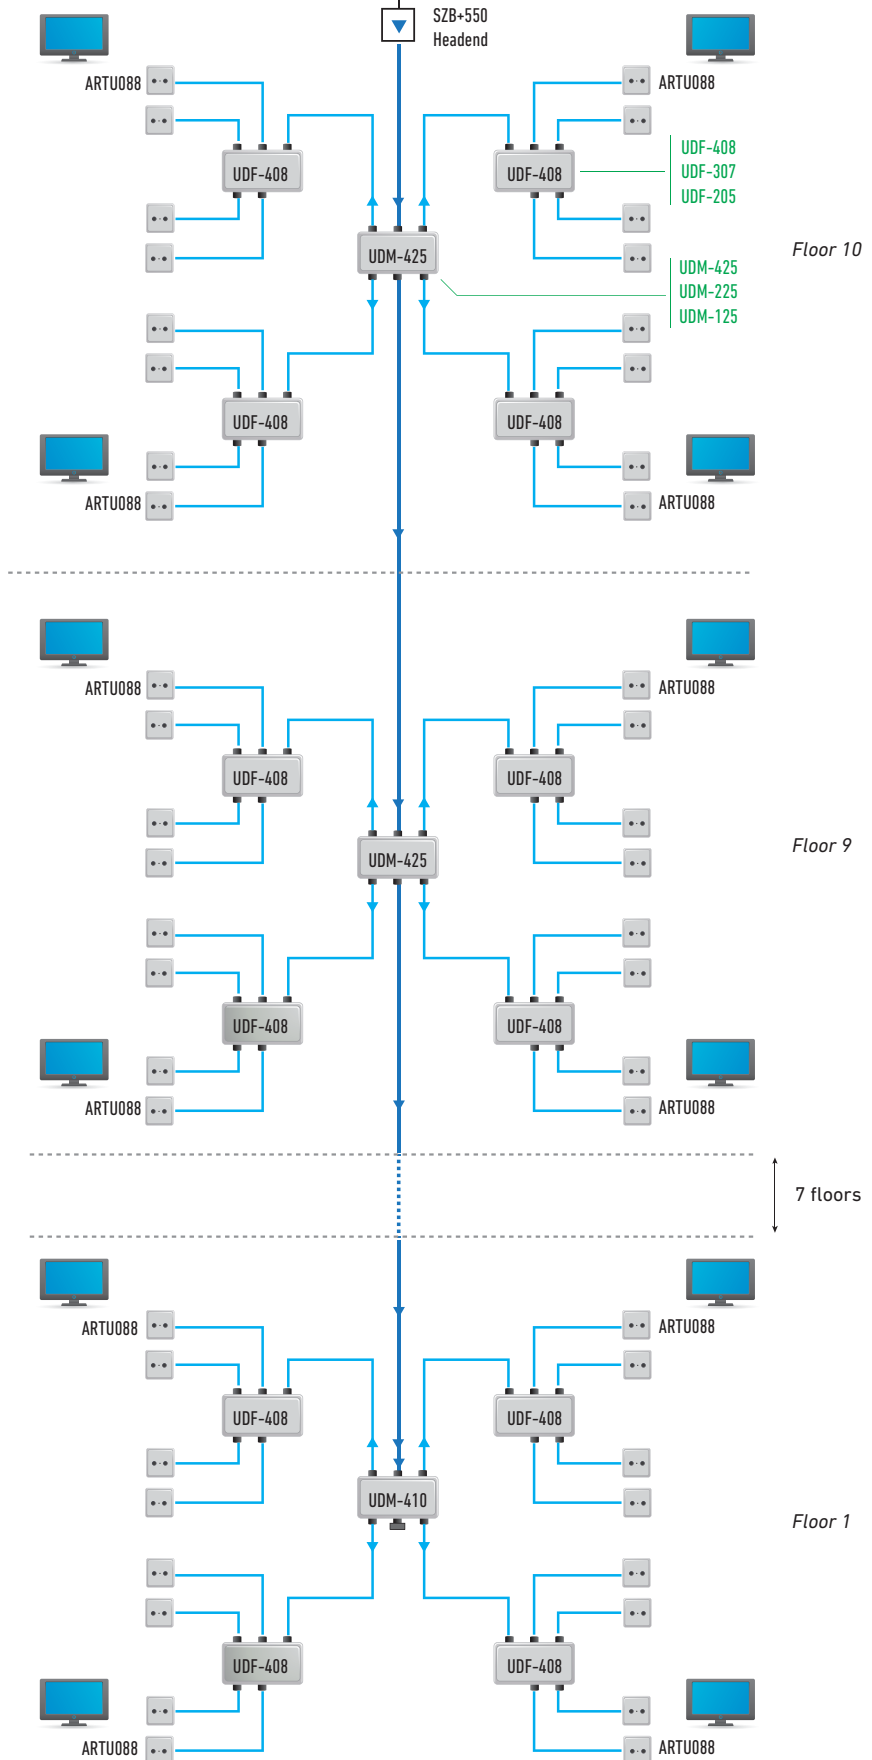

An optical system composed by an emitter, a receiver and splitters.



FTD-420




FRD-400

- Connection of singlemode type optical fibre
- TV+IF output signals
- TV+IF-SAT Optical receiver FRD-400
- Replaceable power supply
- Easy to set up

□ Solution for distribution of DTT and satellite IF signals over large collective installations: residential districts, hotels, hospitals.

Installation example

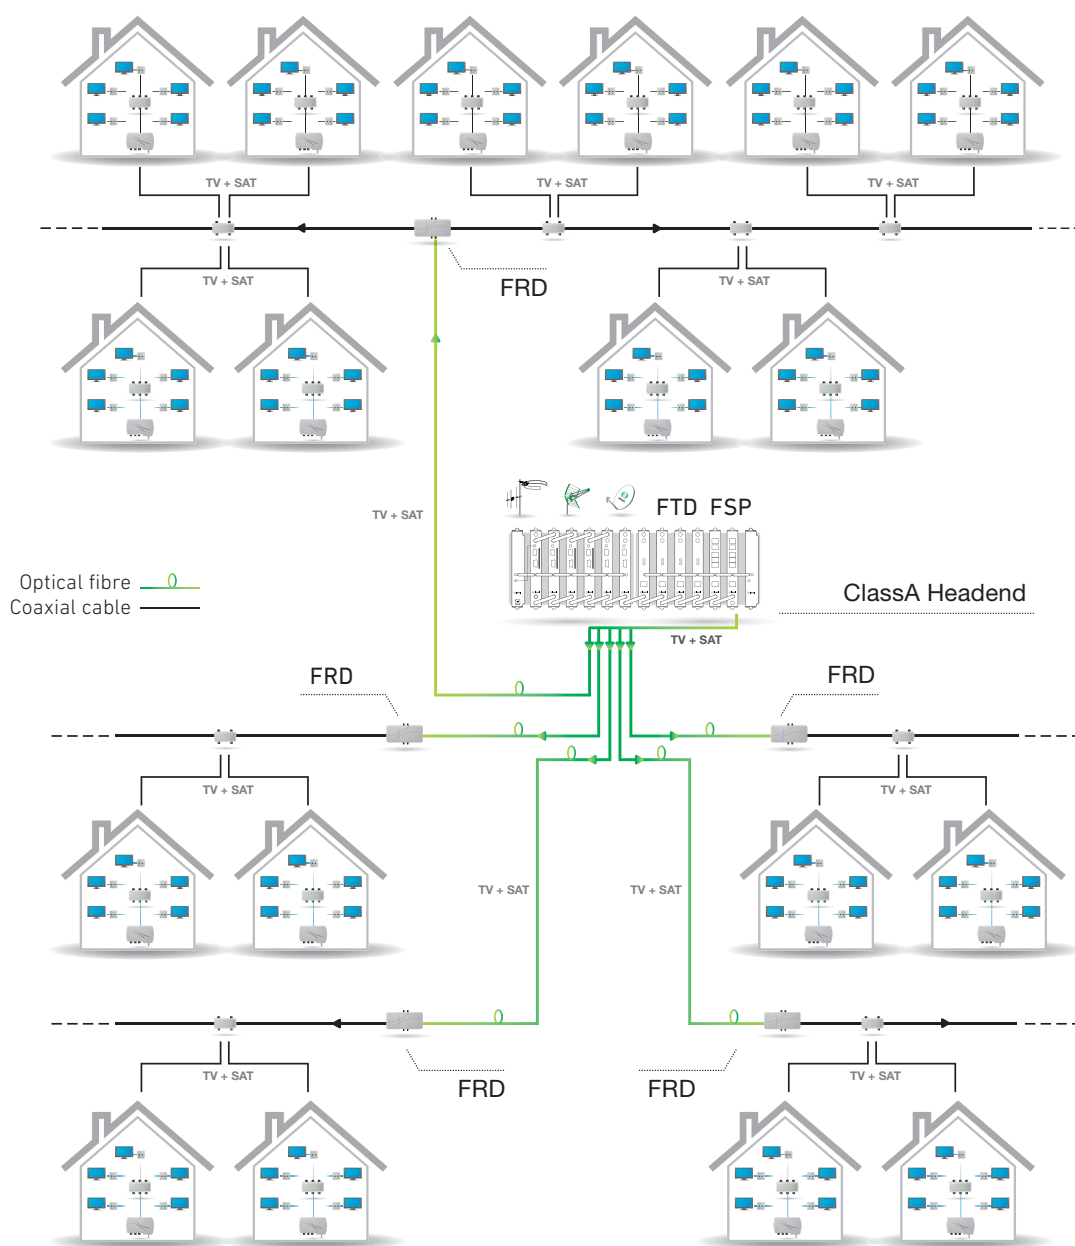

TV+SAT-IF optical transmitter



- 1 TV input (45-862 MHz) — 1 SAT-IF input (950-2150 MHz) — 1 Optical output (1310 nm). Connection of singlemode type optical fibre.
- Solution for distribution of terrestrial TV and satellite IF signals (analog and digital) over large collective installations: residential districts, hotels, hospitals.
- Ultralinear, APC-controlled, 4 mW DFB (Distributed Feedback) laser. Fully compatible with PAL, SECAM, NTSC, FM, DVB-S, DVB-T, DVB-C and other standards.
- TV and SAT-IF separate ways with very high RF amplification gain. Independent OMI settings for TV and SAT-IF.
- DC powered by a CFP power supply module. Mountable on baseplates or rack-frame of ClassA headend.

| MODEL | | FTD-420 |
|--|-------|---|
| REF. | | 4915 |
| Optical output power | mW | 4 (=6 dBm) |
| RF inputs | | 2 TV (45-862 MHz) IF (950-2150 MHz) |
| Optical section | | |
| Optical wavelength | nm | 1310 (±20) |
| Relative intensity noise (RIN) of the laser | dB/Hz | < -150 |
| Optical output return loss | dB | > 50 |
| Optical output connector | | SC / APC |
| RF section | | |
| TV input level (for OMI 4% CENELEC carriers) | dBµV | 72 ... 87 |
| IF input level (for OMI 1.6%) | dBµV | 72 ... 87 |

| | | |
|---|----|------------------------|
| RF flatness | dB | ±0,75 (TV) ,, ±1 (IF) |
| Adjustm. of TV level to laser - TV-OMI adjustment | dB | -15 ... 0 |
| Adjustm. of IF level to laser - IF-OMI adjustment | dB | -15 ... 0 |
| RF input impedance | Ω | 75 |
| RF input return loss | dB | > 12 (TV) ,, > 10 (IF) |
| General | | |
| Power requirements | | +12 VDC / 650 mA |
| DC connector type | | banana socket |
| Dimensions | mm | 230 x 195 x 32 |

Optical splitting modules




- 2, 3, 4, and 6-way optical splitters for singlemode fibre applications.
- Mountable on baseplates or rack-frame of ClassA headend. The splitters share out the optical power of FTD transmitters to feed multiple field nodes, hence maximizing the use of optical transmission equipment.

| MODEL | | FSP-302 | FSP-303 | FSP-304 | FSP-306 |
|-------------------------|----|----------------------|---------|---------|----------|
| REF. | | 4904 | 4905 | 4916 | 4918 |
| No. of optical outputs | | 2 | 3 | 4 | 6 |
| Wavelength | nm | 1310 ±40 1550 ±40 | | | 1310 ±40 |
| Insertion loss | dB | 3.7 | 5.5 | 7.2 | 9.0 |
| Return loss | dB | > 55 | | | |
| Output isolation | dB | > 55 | | | |
| Input/output connectors | | SC / APC | | | |
| Dimension | mm | 230 x 195 x 32 | | | |

A solution for the distribution DTT and IF satellite signals in extensive group installations.

Installation example

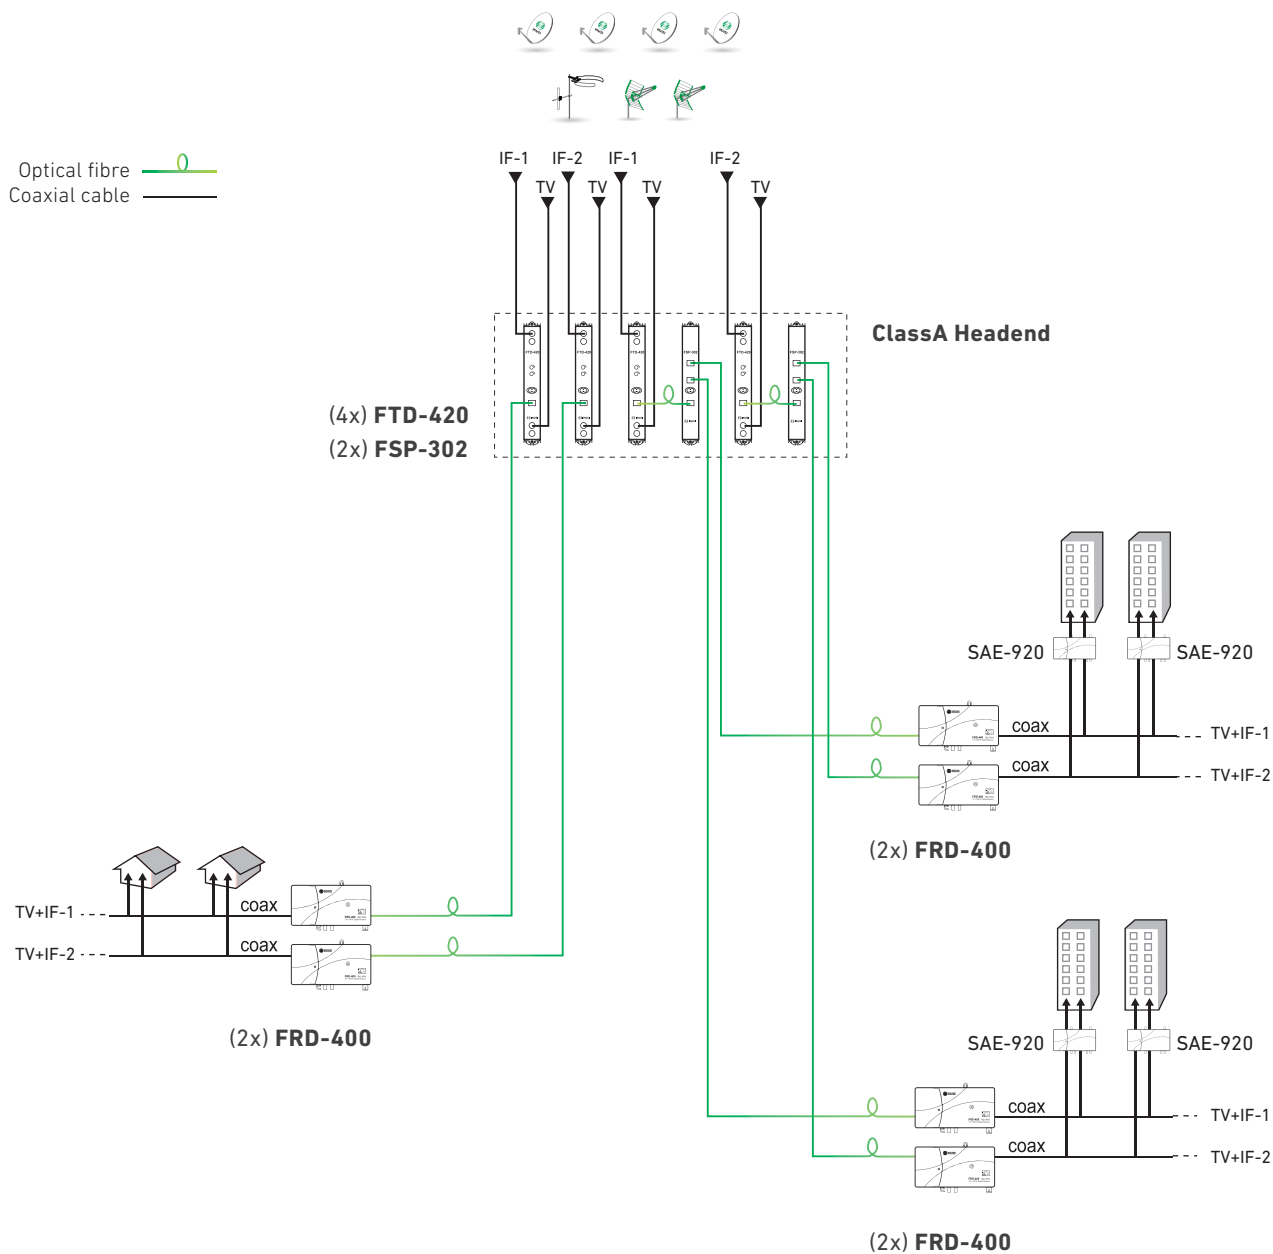

TV+IF-SAT optical receiver



- 1 optical input (1290-1600 nm) — 1 RF output (45-2150 MHz).
- Connection of singlemode type optical fibre.
- Especially designed for the delivery of terrestrial and satellite signals (analog and digital) over large collective installations.
- Mains powered, 50/60 Hz. Electrical safety protection level: Class II. Insertable power cord with bipolar plug.
- Injection-moulded zinc alloy housings. Wall-fixing. Indoor mounting.

| MODEL | | FRD-400 | |
|------------------------------|-------------|-----------------------------------|-------------------------------------|
| REF. | | 4914 | |
| Optical window | dBm | -4 ... +1 | |
| Forward RF output frequency | MHz | 45-862 (TV) and 950-2150 (IF) | |
| Optical section | | | |
| Optical wavelength | nm | 1290 - 1600 | |
| Optical output return loss | dB | > 50 | |
| Optical input connector type | | SC / APC | |
| RF section | | | |
| RF flatness | dB | ±1.5 (TV) .. ±2 (IF) | |
| RF output level | Analogue TV | dB μ V | 119 ¹ / 104 ² |
| | IF | | 120 ³ / 105 ⁴ |
| CNR | Analogue TV | dB | 52.5 ⁵ / 50 ⁶ |
| | IF | | 36 ⁷ / 33.5 ⁸ |
| CTB | dB | 58 ⁵ / 60 ⁶ | |
| CSO | dB | 59 ⁵ / 63 ⁶ | |

| Variable attenuator for TV | dB | 0 - 15 |
|-------------------------------|-----|--------------------|
| Range of slope control for TV | dB | 0 - 15 |
| IF Variable attenuator | dB | 0 - 15 |
| IF slope control | dB | 0 - 10 |
| Output return loss | dB | >12 (TV) , 10 (IF) |
| Output test | dB | -30 |
| General | | |
| Mains voltage | VAC | 230 - 240 |
| Consumption | W | 15 |
| Dimensions | mm | 222 x 140 x 44 |

1 -60dB IMD3 (DIN 45004B)

2 -With 42 Cenelec carriers and 4% OMI

3 -35dB IMD3 (EN 50083-3)

4 -1.6% OMI5

5 -For maximum optical input power and note2-marked RF output level.


6 -For minimum optical input power and note2-marked RF output level.

7 -For maximum optical input power and note4-marked RF output level.

8 -For minimum optical input power and note4-marked RF output level.

Especially designed for the delivery of DTT and satellite digital signals over large collective installations.

Installation example

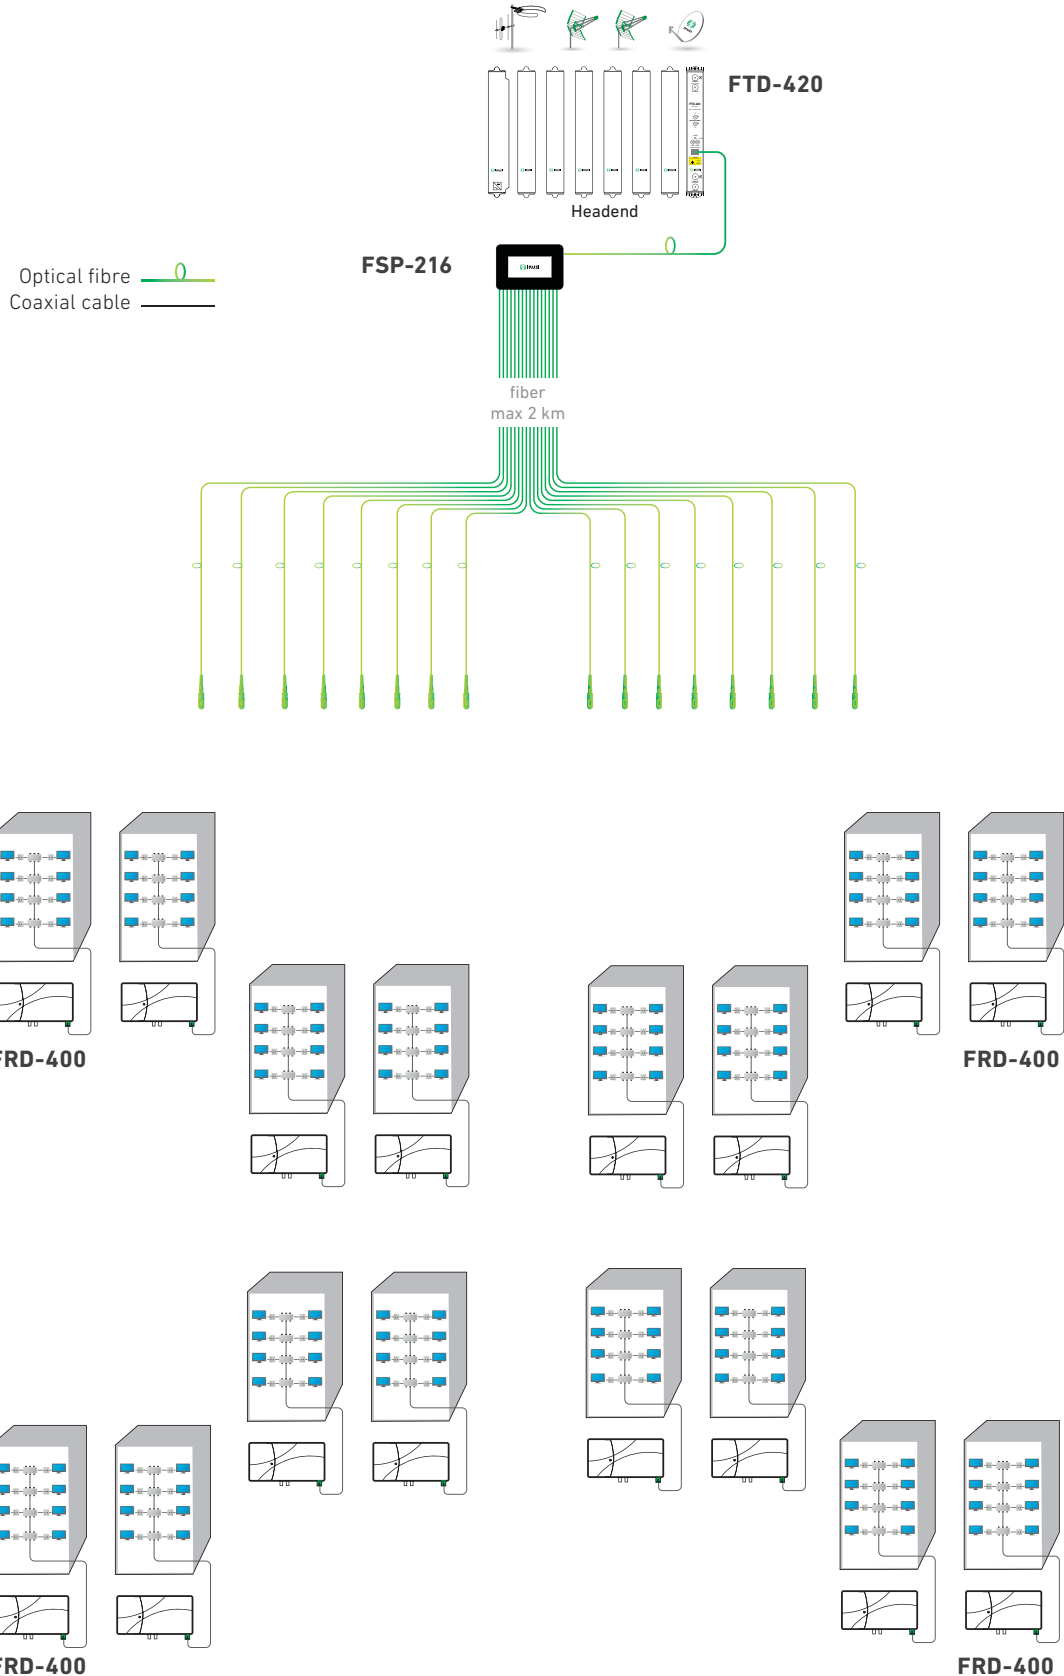

Sat/Terr optical fibre receiver

| MODEL | | FRD-100 |
|--------------------------------------|------|---|
| REF. | | 4895 |
| Frequency range | MHz | 45 - 2600 |
| Optical wavelength | nm | 1290 - 1600 |
| Output level | dBµV | Input level 0 dbm = 94 Input level -3 dbm = 88 Input level -6 dbm = 82 Input level -9 dbm = 76 |
| CNR (DVB-T signals) for output level | dB | 46 |
| Coaxial connector | | F |
| Optical connectors | | SC/APC |
| Optical window | dBm | -13 ... +1 |
| Consumption (12V) | W | 3.5 |
| Power supply | Vdc | 18 |
| Dimensions | mm | 118 x 210 x 40 |



FRD-100

Optical splitters

| MODEL | | FSP-202 | FSP-204 | FSP-208 | FSP-216 |
|---------------------------|----|---------------|---------|---------|---------|
| REF. | | 4896 | 4898 | 4897 | 4899 |
| Number of optical outputs | | 2 | 4 | 8 | 16 |
| Wavelength | nm | 1290 ... 1610 | | | |
| Attenuation | dB | 4 | 7.3 | 10.3 | 13.5 |
| Insertion loss | dB | > 60 | | | |
| Outputs isolation | dB | > 60 | | | |
| In/Out connectors | | SC / APC | | | |
| Dimensions | mm | 100 x 80 x 10 | | | |



FSP-202



FSP-204



FSP-208



FSP-216

Optical attenuators


| MODEL | | FAO-004 | FAO-006 |
|-------------|----|----------------|----------------|
| REF. | | 4892 | 4893 |
| Attenuation | dB | 4 | 6 |
| Connectors | | SC / APC | SC / APC |
| Dimensions | mm | 230 x 195 x 32 | 230 x 195 x 32 |



FAO-006

Application in the fibre optic distribution of DTT and satellite TV signals in single family residential developments.

Installation example

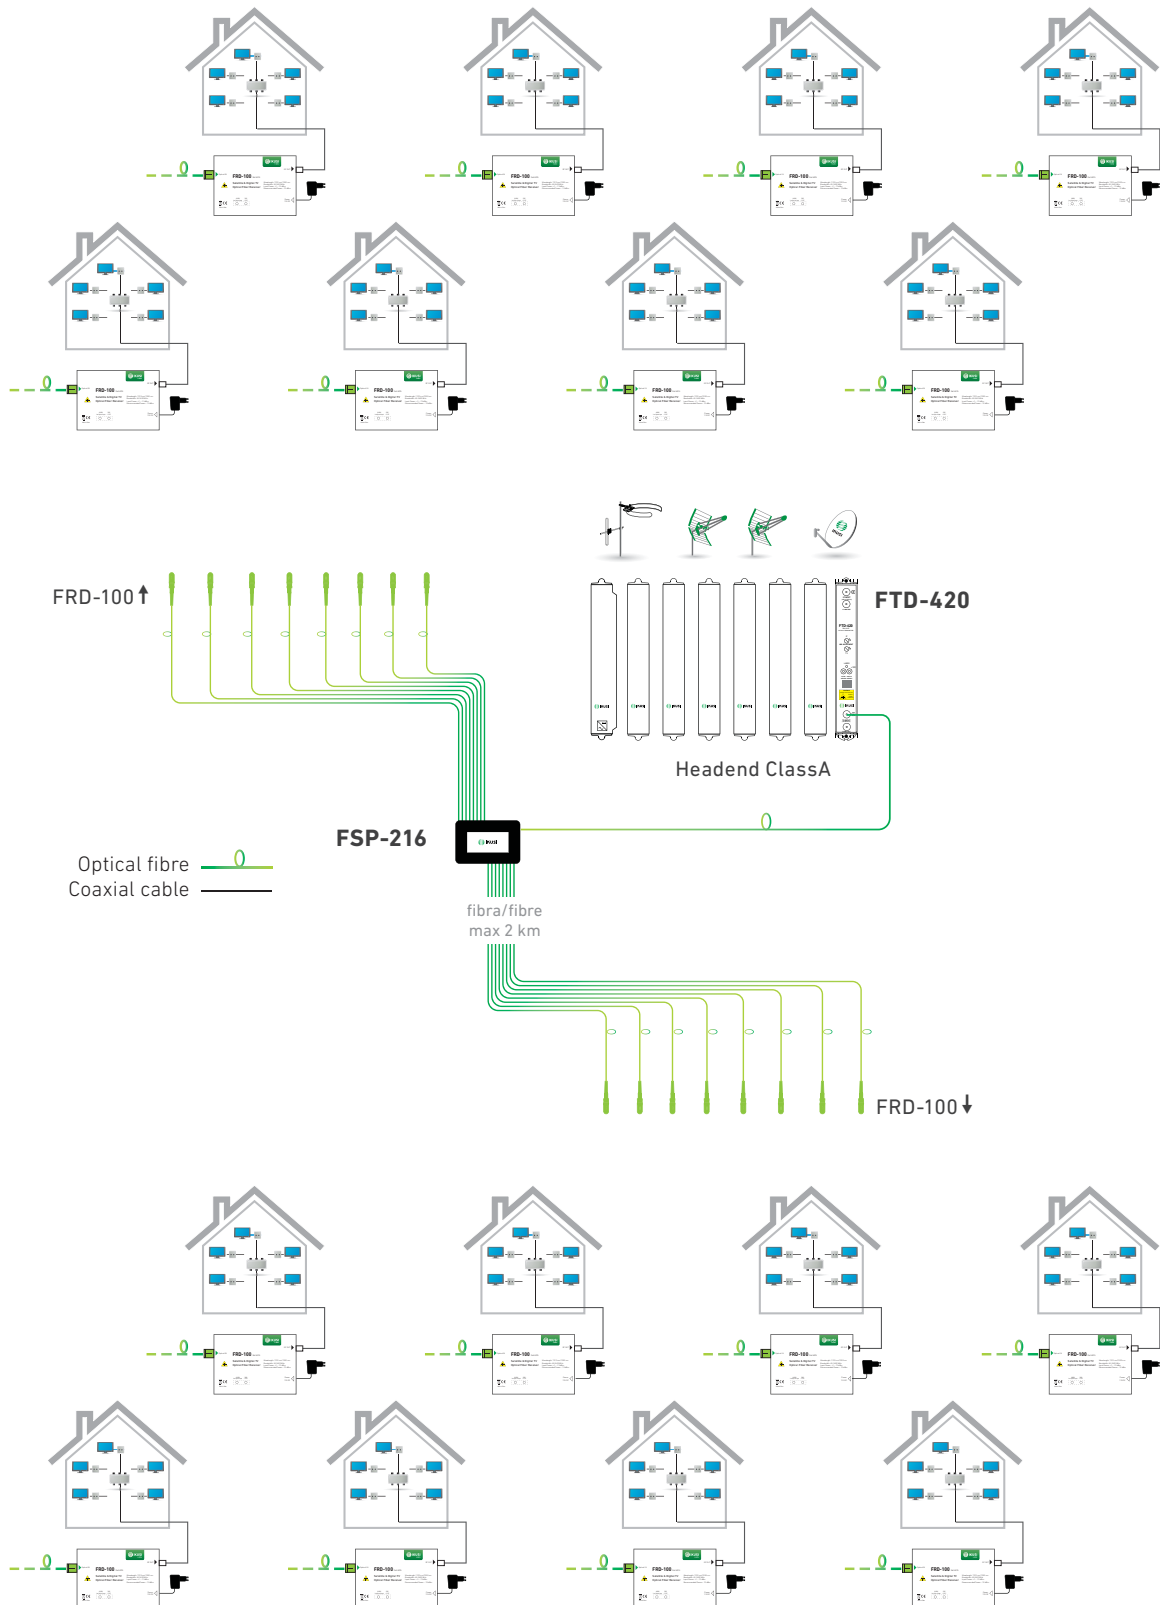

LNB with optical output

| MODEL | | OPTICAL-LNB |
|----------------------------|-----|--------------|
| REF. | | 4956 |
| Reception frequency range | GHz | 10.7 - 12.75 |
| Output frequency range LNB | GHz | 0.95 - 5.45 |
| Optical output | | 1 |
| Optical power | dBm | 7 |
| Optical wavelengths | nm | 1310 |
| Noise figure to 25°C | dB | 0.5 |
| Max noise figure to 25°C | dB | 1.1 |
| Gain maximale | dB | 72 |
| Supply voltage | VDC | 12 |
| Image rejection | dB | 40 |
| Consumption | mA | 450 |
| Operating temperature | °C | -30 ... +60 |

- A solution for satellite signal distribution, covering long distances without hardly any loss (< 0,3 dB/km).
- With an output power of 7 dBm, it can feed up to 32 distribution points over a great distance.
- It can distribute four polarities or 4 bands using a single optical fibre.
- An FC/PC connector allows single-mode optical fibre connection.
- Power supply (Included) using an independent F connector.



OPTICAL-LNB

Kit LNB+Transmitter+Power Supply

| MODEL | | ODU32-KIT |
|------------------------------|---------|--------------------------------|
| REF. | | 4957 |
| Reception frequency range | GHz | 10.7 - 12.75 |
| Output frequency range LNB | GHz | 0.95 - 5.45 |
| Output | | Coaxial RF |
| Gain | dB | 72 |
| Power supply LNB | VDC | 12 |
| Output connector | | N 50 Ω |
| Operating temperature | °C | -30 ... +60 |
| SAT + TERR (DTT) Transmitter | | |
| Input SAT frequency range | GHz | 0.95 - 5.45 |
| Input TERR frequency range | MHz | 88-108 / 213 - 230 / 470 - 854 |
| Terrestrial input level | dBμV | 75 |
| Terrestrial input connector | | F |
| Optical output | | 2 |
| Satellite input connector | | N 50 Ω |
| Optical output level | dBm | (2x) 7 |
| Supply voltage | VDC / A | 12 / 1 |



ODU32-KIT

Sat+Terr (DTT) optical receivers

| MODEL | | QUAD-GTU | QUATRO-GTU |
|--------------------------|---------|-----------|------------------------------|
| REF. | | 4952 | 4953 |
| Outputs | | 4 | 5 VL-HL-VH-HH-[DTT+Radio] |
| Optical input power | dBm | -12 to -3 | |
| Satellite output level | dBμV | 60 to 77 | |
| Terrestrial output level | dBμV | 64 to 74 | |
| Supply voltage | VDC / A | 6 / 1 | |



QUAD-GTU



QUATRO-GTU

Power supply 20V


| MODEL | | PSU-QUATRO |
|------------------------|----------|------------------|
| REF. | | 4951 |
| Input voltage | VAC / Hz | 100-240 / 50/60 |
| Output voltage | VDC | 20 |
| Maximal output current | A | 1,2 |
| Output power | W | 24 |
| Overcurrent protection | A | 5,5 |
| Operating temperature | °C | 0 - 40 |
| Dimensions | mm | 84,9 x 50 x 40,5 |
| Weight | gr | 200 |




PSU-QUATRO

Application in the optical fibre distribution of DTT signals and IF satellite signals in installations of up to 64 optical receivers.

Installation example

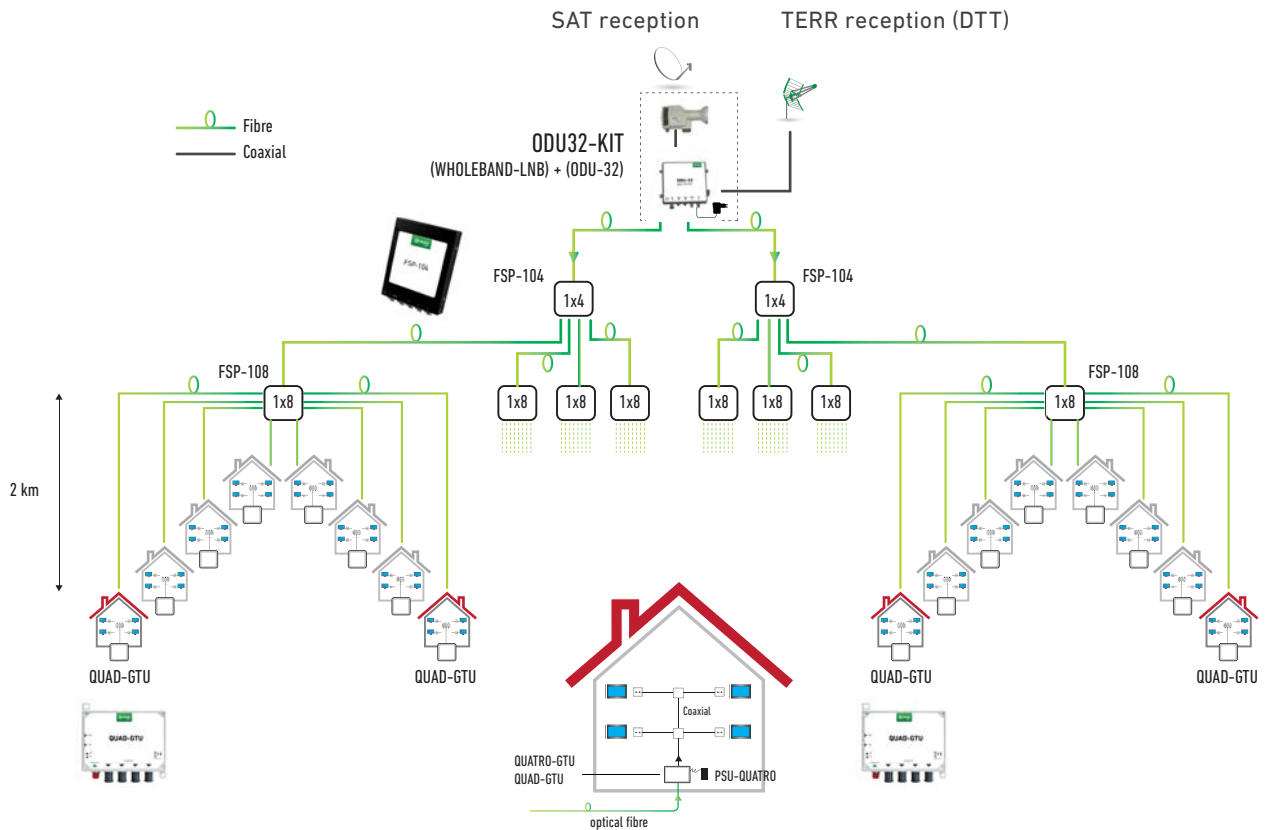

Combination of optical LNB + multiswitches in cascaded or star basis

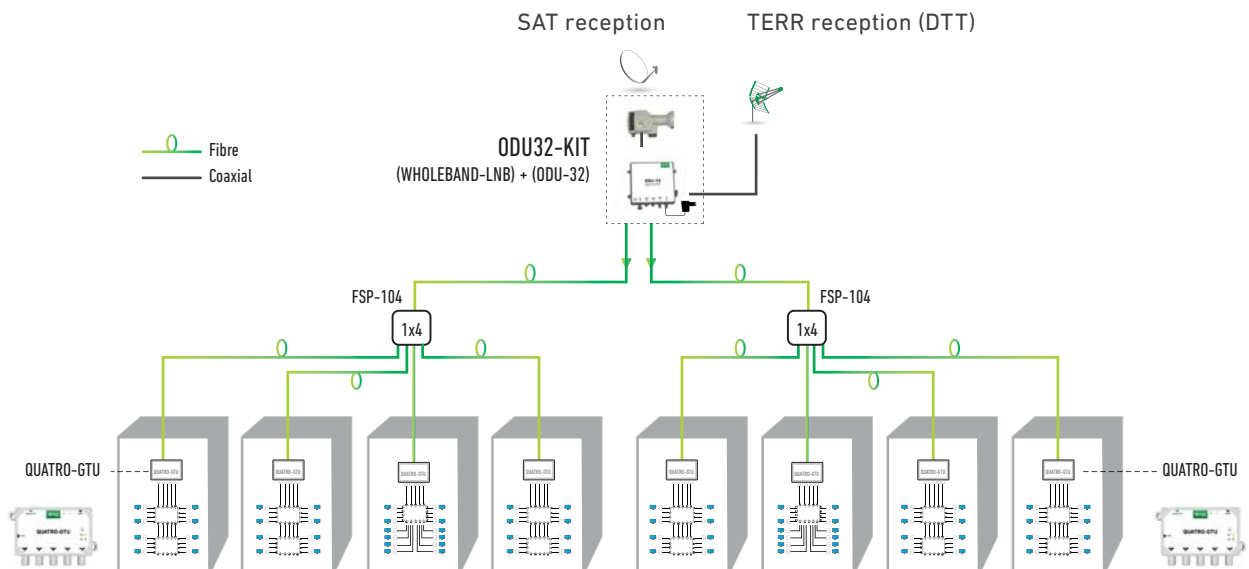

LNB input 4 polarities RF

| MODEL | | WHOLEBAND-LNB |
|---------------------------------|-----|---------------|
| REF. | | 4955 |
| Input frequency range | GHz | 10.7 - 12.75 |
| Output frequency range | GHz | 0.95 - 5.45 |
| Output | | Coaxial RF |
| Gain | dB | 72 |
| Noise figure (typical at 25 °C) | dB | 0.7 |
| Output connector | | N 50 Ω |
| Operating temperature | °C | -30 ... +60 |
| LNB power supply | VDC | 12 |

Power supply not included



WHOLEBAND-LNB

Sat+Terr optical transmitter

| MODEL | | ODU-32 |
|-----------------------------|---------|--------------------------------|
| REF. | | 4961 |
| Input SAT frequency range | GHz | 0.95 - 5.45 |
| Input TERR frequency range | MHz | 88-108 / 213 - 230 / 470 - 854 |
| Terrestrial output level | dBμV | 75 |
| Terrestrial input connector | | F |
| Optical outputs | | 2 |
| Satellite input connector | | N 50 Ω |
| Optical output level | dBm | (2x) 7 |
| Supply voltage | VDC / A | 12 / 1 |

Power supply not included



ODU-32

Active splitter


| MODEL | | FSA-401 |
|-------------------|-----|-------------|
| REF. | | 4962 |
| Frequency range | GHz | 0.95 - 5.45 |
| Number of outputs | | 4 |
| Connectors | | N 50 Ω |
| Distribution loss | dB | 0 |



FSA-401

Application in fibre optic distribution of DTT and satellite IF in installations of up to 256 optical receivers.

Installation example

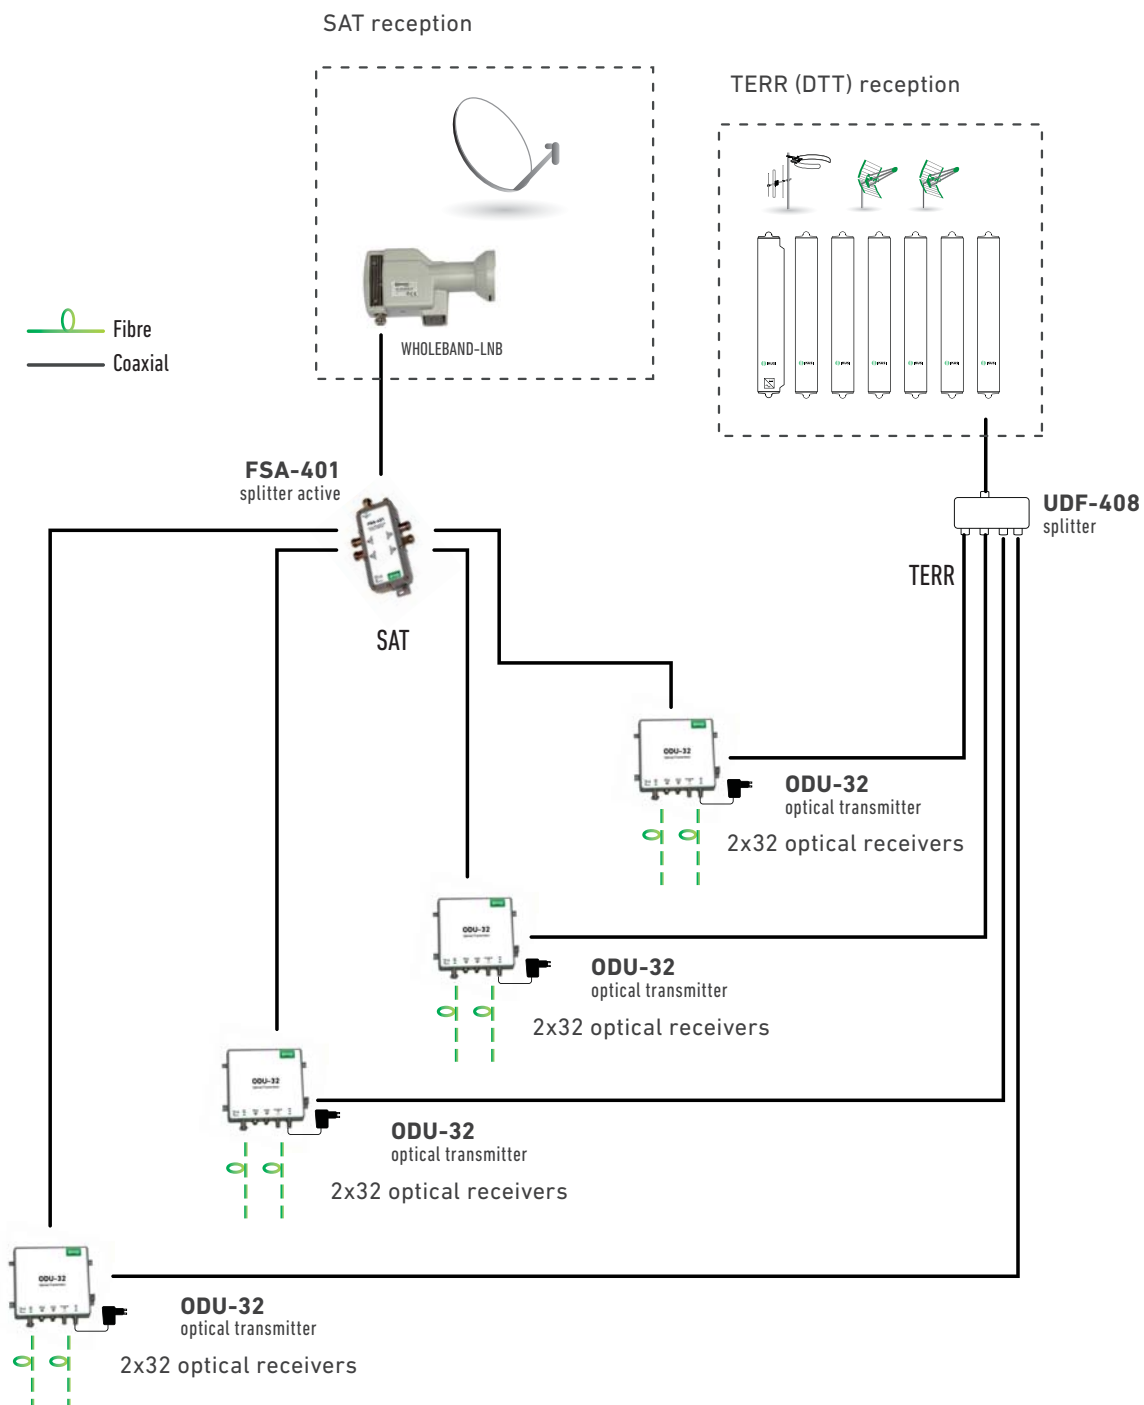

Optical splitters (FC/PC)

| MODEL | | FSP-102 | FSP-103 | FSP-104 | FSP-108 |
|-------------|----|---------|---------|---------|---------|
| REF. | | 4888 | 4889 | 4890 | 4891 |
| Outputs | | 2 | 3 | 4 | 8 |
| Attenuation | dB | 4.0 | 6.13 | 7.32 | 10.5 |



FSP-104

Optical attenuators (FC/PC)

| MODEL | | FAO-105 | FAO-110 | FAO-115 |
|-------------|----|---------|---------|---------|
| REF. | | 4946 | 4947 | 4948 |
| Attenuation | dB | 5 | 10 | 15 |



FAO-105

Sat+Terr (DTT) optical converter

| MODEL | | O2E |
|-----------------------------|------|--|
| REF. | | 4968 |
| Optical Wavelength | nm | 100 - 1650 |
| Optical return loss | dB | 20 |
| Input optical power | dBm | min: -15 ; max: -3 |
| SAT frequency | GHz | 0.95 - 5.45 |
| Satellite return loss | dB | 9 |
| Satellite output power | dBμV | 80 |
| Terrestrial frequency range | MHz | DTT: 470-862 ; DAB: 174-240 ; FM: 88-108 |
| Terrestrial output power | dBμV | 87 |
| Input voltage range | V | 10 - 24 |
| Consumption | mA | 65 |

Power supply not included



O2E

Optical Receiver (Twin SCR Unicable Output)

| MODEL | | DSCR-GTU |
|-----------------------------|------|--|
| REF. | | 4967 |
| Satellite frequency range | MHz | 950 - 2150 |
| Satellite return loss | dB | 10 |
| Satellite output level | dBμV | 75 |
| Terrestrial frequency range | MHz | DTT: 470-862 ; DAB: 174-240 ; FM: 88-108 |
| Terrestrial return loss | dB | 8 |
| Terrestrial output level | dBμV | 71 |
| Optical wavelength | nm | 1100 to 1650 |
| Optical input power | dBm | min: -12 ; max: -3 |
| Input voltage range | V | 20 |
| Consumption | mA | 430 max |


Power supply not included



DSCR-GTU

Application in the distribution by fibre optic of DTT signals and IF up to 4 satellites.

Installation example

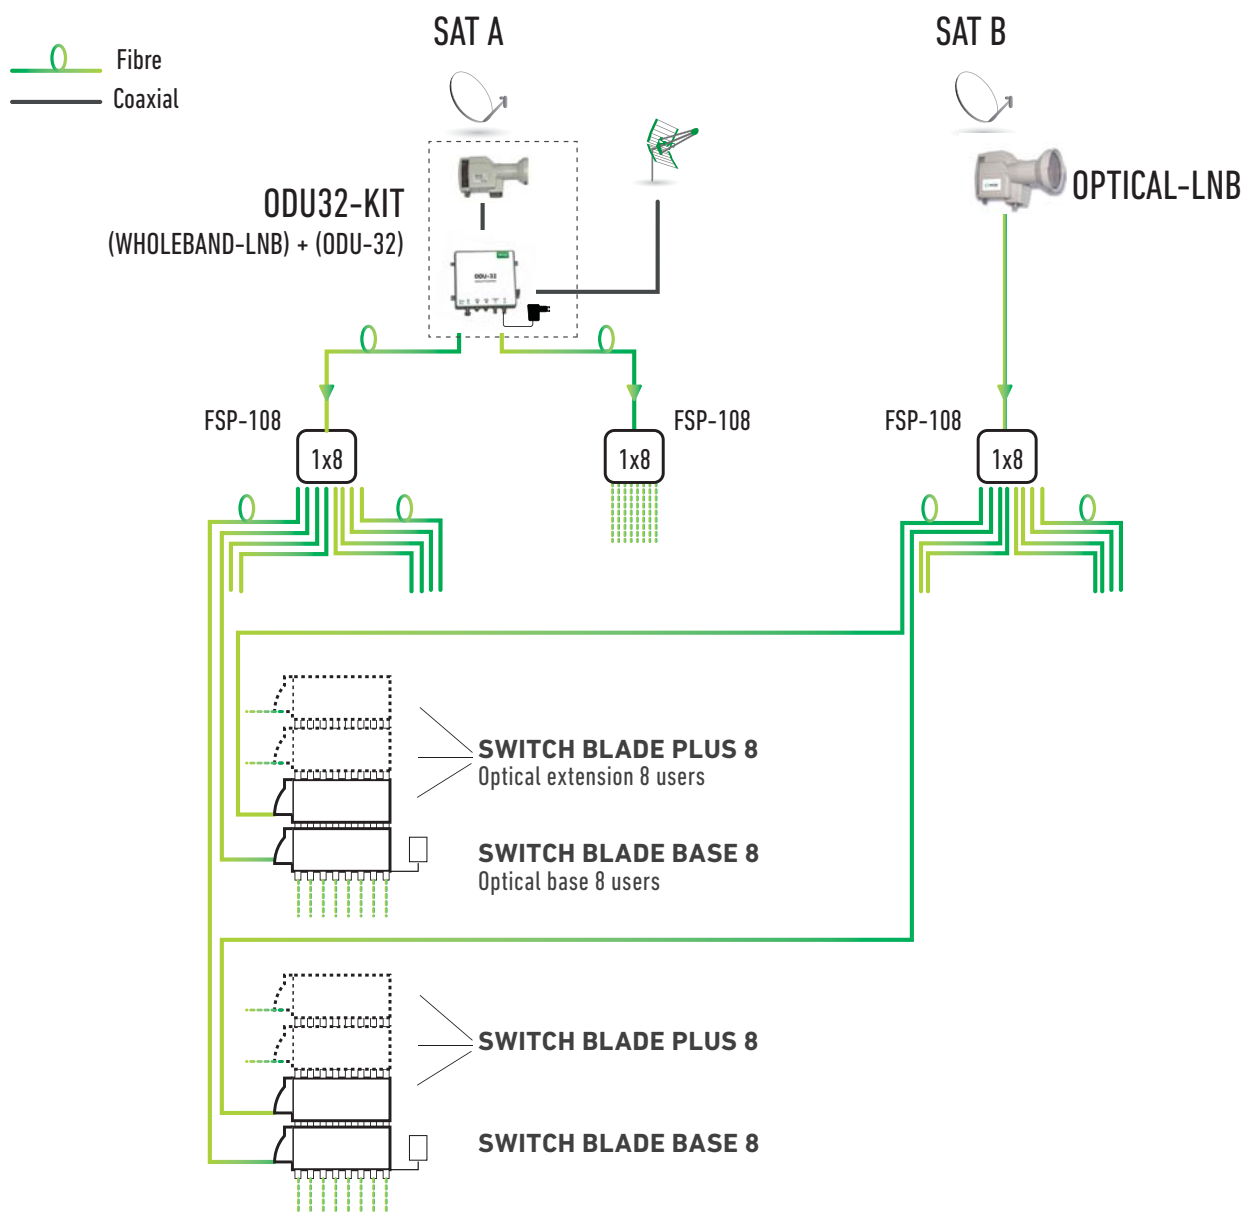

SwitchBlade Base8 Unit

| MODEL | | SWITCH-BLADE BASE 8 |
|-----------------------------|------|--|
| REF. | | 4965 |
| Satellite frequency range | MHz | 950 - 2150 |
| Satellite return loss | dB | 10 |
| Satellite output level | dBμV | 79 |
| Noise figure | dB | 5 |
| Terrestrial frequency range | MHz | DTT: 470-862 ; DAB: 174-240 ; FM: 88-108 |
| Terrestrial output level | dBμV | 69 (for 6 multiplexes) |
| Input voltage range | V | 11 - 20 |



SWITCH BLADE BASE 8

SwitchBlade Plus 8 Unit

| MODEL | | SWITCH-BLADE PLUS 8 |
|-------|--|---------------------|
| REF. | | 4964 |

SatPlus8 way unit connects to the SwitchBlade Base8 Unit allowing a 2nd, 3rd, or 4th Satellite feed to be connected into a system if required.

(1 x Switch Blade Base 8 way + 3 x Switch Blade Plus 8 way)



SWITCH BLADE PLUS 8

FC/PC barrel connector

| MODEL | | BARREL CONNECTOR |
|-------|--|------------------|
| REF. | | 4966 |

Used For Joining 2 Pre Terminated Optical Leads Together



High frequency interconnect cable

| MODEL | | CCO-502 |
|----------------|---|---------|
| REF. | | 4960 |
| Impedance | Ω | 50 |
| Connector type | | N |
| Dimensions | m | 2 |



FC/PC Pre-Terminated Fibre

| MODEL | | FLO-005 | FLO-010 | FLO-020 | FLO-030 | FLO-040 | FLO-050 | FLO-075 | FLO-100 |
|------------|---|---------|---------|---------|---------|---------|---------|---------|---------|
| REF. | | 4933 | 4934 | 4935 | 4936 | 4937 | 4938 | 4939 | 4940 |
| Dimensions | m | 5 | 10 | 20 | 30 | 40 | 50 | 75 | 100 |



• Suitable for indoor/outdoor use

Rack cabinets 19"



| MODEL | | ARE-120 | ARE-220 | ARE-320 | ARE-420 |
|--------------------------------|----|-----------------|------------------|------------------|------------------|
| REF. | | 2174 | 2169 | 2171 | 2172 |
| Panel height | U | 12 | 22 | 32 | 42 |
| Outside dimensions (h x w x d) | mm | 658 x 600 x 450 | 1166 x 600 x 600 | 1610 x 600 x 600 | 2055 x 600 x 600 |
| Packed weight | kg | 30 | 63 | 76 | 88 |

- Inner and outer frame made in high quality steel.
- Four inner 19" frames manufactured in 2 mm.
- Front glass and vented door with lock.
- Top and bottom cable entrance.
- 19" schuko socket board.
- Caged nuts included.
- High resistance casters.
- The cabinet has a temperature control unit on its top which controls the operation of the fans.




Wall mount open rack

| MODEL | | BAS-002 | BAS-004 | BAS-006 |
|----------------------------|-------|-----------------------------|---------|---------|
| REF. | | 8225 | 8226 | 8227 |
| Rack units | | 2U | 4U | 6U |
| Thickness | | 2 mm | | |
| Material | | Cold rolled steel SPCC | | |
| Colour | | Black RAL9005 | | |
| Dimensions | Width | 500 mm | 500 mm | 500 mm |
| | Deep | 300 mm | 300 mm | 300 mm |
| | High | 90 mm | 180 mm | 270 mm |
| Mounting elements included | | (4x) Screw and dowel M6 | | |
| | | (12x) screw, washer and nut | | |

DVB-T/T2 Set-Top-Box



| MODEL | | RDT-100 |
|---------|---------------------------|---|
| REF. | | 1065 |
| System | Standard | ETSI EN 302 755 (DVB-T2) |
| Tuner | Input frequency | VHF: 170-230 MHz UHF: 470-860 MHz |
| | RF Input level | -78 ~ -20 dBm |
| | RF Bandwidth | 7 MHz and 8 MHz |
| Video | Modulation | QPSK, 16 QAM, 64 QAM, 256 QAM |
| | Decoder format | MPEG4 AVC/H.264 HP@L4 MPEG2 MP@MP.HL |
| | Output format | 576i/576p/1080i/1080p |
| Audio | Output Port | HDMI, AV |
| | Decoder format | MPEG-1 (layer 1&2&3), WMA, AC3 |
| USB 2.0 | Audio output | Coaxial, L/R |
| | Supported capacity | 500 GB |
| Power | Supported media | MP3, WMA, JPEG, BMP, AVI, MKV |
| | Supply voltage | 100-240 V - 50/60 Hz |
| | Maximun power consumption | < 10 W |
| Weight | Standby power consumption | < 1 W |
| | Weight | 0.5 kg |
| Size | | 130 x 102 x 28 mm |

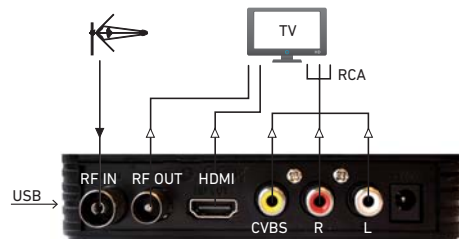

Frequency planning

| Band | Channel | Ch frequency MHz | Picture carrier MHz | Sound carrier MHz | Digital Freq. MHz | |
|--------------------|-----------------|------------------|---------------------|-------------------|-------------------|-------|
| BI | E2 | 47 - 54 | 48.25 | 53.75 | 50.5 | |
| | E3 | 54 - 61 | 55.25 | 60.75 | 57.5 | |
| | E4 | 61 - 68 | 62.25 | 67.75 | 64.5 | |
| Low S-band (SI) | S3 | 118 - 125 | 119.25 | 124.75 | 121.75 | |
| | S4 | 125 - 132 | 126.25 | 131.75 | 128.75 | |
| | S5 | 132 - 139 | 133.25 | 138.75 | 135.5 | |
| | S6 | 139 - 146 | 140.25 | 145.75 | 142.5 | |
| | S7 | 146 - 153 | 147.25 | 152.75 | 149.5 | |
| | S8 | 153 - 160 | 154.25 | 159.75 | 156.5 | |
| | S9 | 160 - 167 | 161.25 | 166.75 | 163.5 | |
| | S10 | 167 - 174 | 168.25 | 173.75 | 170.5 | |
| | BIII | E5 | 174 - 181 | 175.25 | 180.75 | 177.5 |
| | | E6 | 181 - 188 | 182.25 | 187.75 | 184.5 |
| E7 | | 188 - 195 | 189.25 | 194.75 | 191.5 | |
| E8 | | 195 - 202 | 196.25 | 201.75 | 198.5 | |
| E9 | | 202 - 209 | 203.25 | 208.75 | 205.5 | |
| E10 | | 209 - 216 | 210.25 | 215.75 | 212.5 | |
| E11 | | 216 - 223 | 217.25 | 222.75 | 219.5 | |
| E12 | | 223 - 230 | 224.25 | 229.75 | 226.5 | |
| High S-band (SI-I) | S11 | 230 - 237 | 231.25 | 236.75 | 233.5 | |
| | S12 | 237 - 244 | 238.25 | 243.75 | 240.5 | |
| | S13 | 244 - 251 | 245.25 | 250.75 | 247.5 | |
| | S14 | 251 - 258 | 252.25 | 257.75 | 254.5 | |
| | S15 | 258 - 265 | 259.25 | 264.75 | 261.5 | |
| | S16 | 265 - 272 | 266.25 | 271.75 | 268.5 | |
| | S17 | 272 - 279 | 273.25 | 278.75 | 275.5 | |
| | S18 | 279 - 286 | 280.25 | 285.75 | 282.5 | |
| | S19 | 286 - 293 | 287.25 | 292.75 | 289.5 | |
| | S20 | 293 - 300 | 294.25 | 299.75 | 296.5 | |
| | Hiperband (SII) | S21 | 302 - 310 | 303.25 | 308.75 | 306 |
| | | S22 | 310 - 318 | 311.25 | 316.75 | 314 |
| S23 | | 318 - 326 | 319.25 | 324.75 | 322 | |
| S24 | | 326 - 334 | 327.25 | 332.75 | 330 | |
| S25 | | 334 - 342 | 335.25 | 340.75 | 338 | |
| S26 | | 342 - 350 | 343.25 | 348.75 | 346 | |
| S27 | | 350 - 358 | 351.25 | 356.75 | 354 | |
| S28 | | 358 - 366 | 359.25 | 364.75 | 362 | |
| S29 | | 366 - 374 | 367.25 | 372.75 | 370 | |
| S30 | | 374 - 382 | 375.25 | 380.75 | 378 | |
| S31 | | 382 - 390 | 383.25 | 388.75 | 386 | |
| S32 | | 390 - 398 | 391.25 | 396.75 | 394 | |
| S33 | | 398 - 406 | 399.25 | 404.75 | 402 | |
| S34 | | 406 - 414 | 407.25 | 412.75 | 410 | |
| S35 | | 414 - 422 | 415.25 | 420.75 | 418 | |
| S36 | | 422 - 430 | 423.25 | 428.75 | 426 | |
| S37 | | 430 - 438 | 431.25 | 436.75 | 434 | |
| S38 | | 438 - 446 | 439.25 | 444.75 | 442 | |

| Band | Channel | Ch frequency MHz | Picture carrier MHz | Sound carrier MHz | Digital Freq. MHz | |
|------|-----------|------------------|---------------------|-------------------|-------------------|-----|
| UHF | 21 | 470 - 478 | 471,25 | 476,75 | 474 | |
| | 22 | 478 - 486 | 479,25 | 484,75 | 482 | |
| | 23 | 486 - 494 | 487,25 | 492,75 | 490 | |
| | 24 | 494 - 502 | 495,25 | 500,75 | 498 | |
| | 25 | 502 - 510 | 503,25 | 508,75 | 506 | |
| | 26 | 510 - 518 | 511,25 | 516,75 | 514 | |
| | 27 | 518 - 526 | 519,25 | 524,75 | 522 | |
| | 28 | 526 - 534 | 527,25 | 532,75 | 530 | |
| | 29 | 534 - 542 | 535,25 | 540,75 | 538 | |
| | 30 | 542 - 550 | 543,25 | 548,75 | 546 | |
| | 31 | 550 - 558 | 551,25 | 556,75 | 554 | |
| | 32 | 558 - 566 | 559,25 | 564,75 | 562 | |
| | 33 | 566 - 574 | 567,25 | 572,75 | 570 | |
| | 34 | 574 - 582 | 575,25 | 580,75 | 578 | |
| | 35 | 582 - 590 | 583,25 | 588,75 | 586 | |
| | 36 | 590 - 598 | 591,25 | 596,75 | 594 | |
| | 37 | 598 - 606 | 599,25 | 604,75 | 602 | |
| | UHF | 38 | 606 - 614 | 607,25 | 612,75 | 610 |
| | | 39 | 614 - 622 | 615,25 | 620,75 | 618 |
| | | 40 | 622 - 630 | 623,25 | 628,75 | 626 |
| | | 41 | 630 - 638 | 631,25 | 636,75 | 634 |
| | | 42 | 638 - 646 | 639,25 | 644,75 | 642 |
| | | 43 | 646 - 654 | 647,25 | 652,75 | 650 |
| | | 44 | 654 - 662 | 655,25 | 660,75 | 658 |
| | | 45 | 662 - 670 | 663,25 | 668,75 | 666 |
| | | 46 | 670 - 678 | 671,25 | 676,75 | 674 |
| | | 47 | 678 - 686 | 679,25 | 684,75 | 682 |
| | | 48 | 686 - 694 | 687,25 | 692,75 | 690 |
| | | 49 | 694 - 702 | 695,25 | 700,75 | 698 |
| | | 50 | 702 - 710 | 703,25 | 708,75 | 706 |
| | | 51 | 710 - 718 | 711,25 | 716,75 | 714 |
| | | 52 | 718 - 726 | 719,25 | 724,75 | 722 |
| | | 53 | 726 - 734 | 727,25 | 732,75 | 730 |
| | | 54 | 734 - 742 | 735,25 | 740,75 | 738 |
| | | 55 | 742 - 750 | 743,25 | 748,75 | 746 |
| | | 56 | 750 - 758 | 751,25 | 756,75 | 754 |
| | | 57 | 758 - 766 | 759,25 | 764,75 | 762 |
| 58 | | 766 - 774 | 767,25 | 772,75 | 770 | |
| 59 | | 774 - 782 | 775,25 | 780,75 | 778 | |
| 60 | | 782 - 790 | 783,25 | 788,75 | 786 | |
| 61 | | 790 - 798 | 791,25 | 796,75 | 794 | |
| 62 | | 798 - 806 | 799,25 | 804,75 | 802 | |
| 63 | | 806 - 814 | 807,25 | 812,75 | 810 | |
| 64 | | 814 - 822 | 815,25 | 820,75 | 818 | |
| 65 | | 822 - 830 | 823,25 | 828,75 | 826 | |
| 66 | | 830 - 838 | 831,25 | 836,75 | 834 | |
| 67 | | 838 - 846 | 839,25 | 844,75 | 842 | |
| 68 | 846 - 854 | 847,25 | 852,75 | 850 | | |
| 69 | 854 - 862 | 855,25 | 860,75 | 858 | | |

LTE2

LTE1

Output level reduction in broadband amplifiers

BROADBAND TERRESTRIAL TV AMPLIFIERS : The RF output levels specified in this catalogue for IMD3=-60 dB (DIN 45004 B) are applicable when 2 analog TV channels are amplified. If, as is usual, more than 2 TV channels are amplified, such levels have to be reduced according to the following table:

| Number of Channels (n) | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 15 | 20 |
|--|---|---|-----|-----|---|-----|---|-----|----|-----|-----|
| Output level reduction = 7.5 · log (n-1) | 0 | 2 | 3.5 | 4.5 | 5 | 5.5 | 6 | 6.5 | 7 | 8.5 | 9.5 |

FM, DAB AND COFDM SIGNALS : If output levels of the FM, DAB and Digital TV (COFDM) signals are adjusted 10 dB or more below the levels of the analog TV channels, those signals can be ignored when calculating the output reduction level. If referred levels are not reduced as indicated, those signals must be counted as normal channels and the output level de-rated accordingly.

BROADBAND SATELLITE TV OR DIGITAL TERRESTRIAL TV AMPLIFIERS : The RF output levels specified in this catalogue for IMD3=-35 dB (EN 50083-3) are applicable when 1 FM-, QPSK- or COFDM-modulated TV channel is amplified. For a bigger number of channels, such levels have to be reduced according to the following table:

| Number of Channels (n) | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 15 | 20 |
|---|---|-----|---|---|---|-----|---|-----|----|------|----|
| Output level reduction = 10 · log (n-1) | 3 | 4.5 | 6 | 7 | 8 | 8.5 | 9 | 9.5 | 10 | 11.5 | 13 |

CASCADE REDUCTION : When m same-type broadband amplifiers are laid out in cascade, an additional reduction of the output level equals 10 · log m must be taken into account for every amplifier.

HTI

High Density Universal Headend



HTI-424

► HTI-424

- INPUTS: DVB-T/T2, DVB-S/S2, DVB-C
- OUTPUTS: IPTV, DVB-T, DVB-C
- DOUBLE COMMON INTERFACE
- CONECTOR ETHERNET
- 1 INPUT + LOOP OR 4 INPUTS
- IP MULTICAST, IP UNICAST
- MULTISTREAM SUPPORTED

MODEL INDEX

| MODEL | REF. | PAGE | MODEL | REF. | PAGE | MODEL | REF. | PAGE |
|------------------|------|------|--------------------|------|------|--------------|------|------|
| 17WTCAPH1 | 2493 | 90 | CCI-179 | 2521 | 90 | FSP-202 | 4896 | 98 |
| ABT-210 | 1460 | 88 | CCO-502 | 4960 | 106 | FSP-204 | 4898 | 98 |
| ADA-HTI | 4285 | 63 | CCT-125 | 2514 | 90 | FSP-208 | 4897 | 98 |
| AFI-190 | 3461 | 30 | CCT-171 | 2505 | 90 | FSP-216 | 4899 | 98 |
| AMX-400 | 4433 | 53 | CFC-600 | 3131 | 91 | FSP-302 | 4904 | 94 |
| APB-112-M | 3436 | 11 | CFP-900 | 4492 | 53 | FSP-303 | 4905 | 94 |
| APB-224-M | 3437 | 11 | CFR-680 | 2377 | 91 | FSP-304 | 4916 | 94 |
| ARE-120 | 2174 | 107 | CHD-950 | 1503 | 91 | FSP-306 | 4918 | 94 |
| ARE-220 | 2169 | 107 | COF-700 | 4402 | 55 | FTD-420 | 4915 | 94 |
| ARE-320 | 2171 | 107 | COF-809 | 2224 | 25 | GMA-400 | 1911 | 6 |
| ARE-420 | 2172 | 107 | COR-150 | 4404 | 60 | GME-200 | 1886 | 6 |
| ARTU000 | 2735 | 88 | CTF-075 | 2221 | 91 | HDT511V | 1800 | 5 |
| ARTU001 | 2736 | 88 | CTF-125 | 2513 | 91 | HDT513V | 1803 | 5 |
| ARTU009 | 2472 | 88 | CTF-190 | 2368 | 91 | HDTC-694 | 1824 | 5 |
| ARTU058 | 2740 | 88 | DAB-031 | 1728 | 6 | HDTC-790V | 1811 | 5 |
| ARTU059 | 2473 | 88 | DMS-300 | 3372 | 85 | HDTF-C48G | 1816 | 4 |
| ARTU900 | 2474 | 88 | DSCR-GTU | 4967 | 104 | HDTF-C48V | 1818 | 4 |
| ARTU901 | 2475 | 88 | FAO-004 | 4892 | 98 | HDTF-C58V | 1819 | 4 |
| ARTU902 | 2476 | 88 | FAO-006 | 4893 | 98 | HDTF-C60G | 1820 | 4 |
| ARTU903 | 2477 | 88 | FAO-105 | 4946 | 102 | HDTF-C60V | 1821 | 4 |
| ATP-190-C48 | 3590 | 28 | FAO-110 | 4947 | 102 | HDTF-C69V | 1817 | 4 |
| ATP-190-C60 | 3589 | 28 | FAO-115 | 4948 | 102 | HDTN-694V | 1825 | 5 |
| ATP-190-C69 | 3588 | 28 | FAV-020 | 3105 | 91 | HDTN-790V | 1813 | 5 |
| ATP-200-C48 | 3584 | 29 | FAV-920 | 3242 | 91 | HPA-125 | 4427 | 54 |
| ATP-200-C60 | 3434 | 29 | FIS-950 | 1107 | 91 | HPA-920 | 4437 | 54 |
| ATP-200-C69 | 3583 | 29 | FLO-005 | 4933 | 106 | HTA-125 | 3868 | 60 |
| ATP-290-C48 | 3593 | 28 | FLO-010 | 4934 | 106 | HTI-404 | 3864 | 58 |
| ATP-290-C60 | 3592 | 28 | FLO-020 | 4935 | 106 | HTI-424 | 3863 | 59 |
| ATP-290-C69 | 3591 | 28 | FLO-030 | 4936 | 106 | HTL-STC | 3860 | 51 |
| ATP-400-C48 | 3596 | 29 | FLO-040 | 4937 | 106 | HTL-TRX | 3861 | 50 |
| ATP-400-C60 | 3595 | 29 | FLO-050 | 4938 | 106 | HTL-TT2 | 3859 | 52 |
| ATP-400-C69 | 3594 | 29 | FLO-075 | 4939 | 106 | IFC-215 | 3241 | 91 |
| ATP-490-C48 | 3599 | 28 | FLO-100 | 4940 | 106 | IKS-1E/FM | 1725 | 6 |
| ATP-490-C60 | 3598 | 28 | FLOW BASE | 4312 | 66 | JSBA-100-C48 | 1224 | 11 |
| ATP-490-C69 | 3597 | 28 | FLOW COVER | 4316 | 66 | JSBA-100-C60 | 1222 | 11 |
| AV-020 | 1674 | 91 | FLOW DEVICE MGR | 4317 | 67 | JSBA-100-C69 | 1223 | 11 |
| BACK-500 | 3866 | 61 | FLOW ENC | 4315 | 66 | KMV-100 | 1888 | 6 |
| BAP-200 | 1949 | 6 | FLOW HUB | 4314 | 66 | MAC-401 | 4485 | 73 |
| BARREL CONNECTOR | 4966 | 106 | FLOW IN2 | 4318 | 66 | MAC-HD | 4493 | 70 |
| BAS-002 | 8225 | 107 | FLOW IN4 | 4319 | 66 | MAC-HOME | 4488 | 71 |
| BAS-004 | 8226 | 107 | FLOW IRD EXTENDER | 1051 | 66 | MAS-250 | 1880 | 6 |
| BAS-006 | 8227 | 107 | FLOW OUT | 4313 | 66 | MAS-300 | 1941 | 6 |
| BAS-700 | 4403 | 55 | FLOW PSU | 4308 | 66 | MAW-201 | 3031 | 74 |
| BAS-900 | 4411 | 55 | FLOW PSU REDUNDANT | 4320 | 66 | MAW-300 | 3030 | 72 |
| BAS-913 | 2222 | 25 | FLOW SEC | 4311 | 66 | MCP-801 | 3849 | 44 |
| BAS-915 | 2220 | 25 | FLOW STB | 1050 | 66 | MCP-811 | 3851 | 44 |
| BAS-919 | 2225 | 25 | FLOW STB AC3+ | 4329 | 66 | MDI-910 | 4020 | 46 |
| BBT-100 | 1913 | 6 | FLTE-481 | 1436 | 87 | MHD-201 | 3854 | 39 |
| BCF-060 | 2379 | 91 | FLTE-482 | 1437 | 87 | MHD-202 | 3855 | 39 |
| BFT-100 | 1876 | 6 | FLTE601 | 1435 | 86 | MSA-005 | 3780 | 82 |
| BMA-200 | 1887 | 6 | FMM-100 | 3211 | 83 | MSA-009 | 3781 | 82 |
| BTA-225 | 1950 | 6 | FRD-100 | 4895 | 98 | MSA-013 | 3782 | 82 |
| BUS-013 | 4430 | 55 | FRD-400 | 4914 | 96 | MSA-017 | 3783 | 82 |
| CAD | 1502 | 91 | FSA-401 | 4962 | 102 | MSC-0504-05 | 3680 | 80 |
| CCF-111 | 3133 | 91 | FSP-102 | 4888 | 102 | MSC-0504-10 | 3681 | 80 |
| CCH-175 | 2506 | 90 | FSP-103 | 4889 | 102 | MSC-0508-05 | 3682 | 80 |
| CCI-174 | 2016 | 90 | FSP-104 | 4890 | 102 | MSC-0508-10 | 3683 | 80 |
| CCI-175 | 2522 | 90 | FSP-108 | 4891 | 102 | MSC-0512-05 | 3684 | 80 |

MODEL INDEX

| MODEL | REF. | PAGE | MODEL | REF. | PAGE | MODEL | REF. | PAGE |
|------------------|-----------|------|------------------|-----------|------|--------------------------|-----------|------|
| MSC-0512-10..... | 3685..... | 80 | NBS-604-C48..... | 3567..... | 21 | SPC-030..... | 3844..... | 45 |
| MSC-0516-05..... | 3686..... | 80 | NBS-604-C60..... | 3566..... | 21 | SPI-300..... | 4070..... | 55 |
| MSC-0516-10..... | 3687..... | 80 | NBS-604-C69..... | 3565..... | 21 | SR-HTI..... | 3867..... | 63 |
| MSC-0906-10..... | 3688..... | 80 | NBS-695-C48..... | 3570..... | 21 | SRC-111..... | 4096..... | 42 |
| MSC-0906-15..... | 3689..... | 80 | NBS-695-C60..... | 3569..... | 21 | SRF-011..... | 4084..... | 43 |
| MSC-0910-10..... | 3690..... | 80 | NBS-695-C69..... | 3568..... | 21 | SWITCH BLADE BASE 8..... | 4965..... | 106 |
| MSC-0910-15..... | 3691..... | 80 | NBS-801-C48..... | 3573..... | 20 | SWITCH BLADE PLUS 8..... | 4964..... | 106 |
| MSC-0916-12..... | 3692..... | 80 | NBS-801-C60..... | 3572..... | 20 | SZB+550..... | 2260..... | 24 |
| MSC-0916-17..... | 3693..... | 80 | NBS-801-C69..... | 3571..... | 20 | SZB-128..... | 2293..... | 25 |
| MSC-0920-12..... | 3694..... | 80 | NBS-804-C48..... | 3564..... | 20 | SZB-129..... | 2294..... | 25 |
| MSC-0920-17..... | 3695..... | 80 | NBS-804-C60..... | 3563..... | 20 | SZB-139..... | 3152..... | 25 |
| MSC-1306-10..... | 3696..... | 81 | NBS-804-C69..... | 3562..... | 20 | SZB-148..... | 2246..... | 25 |
| MSC-1306-15..... | 3697..... | 81 | NBS-895-C48..... | 3576..... | 20 | SZB-168..... | 3160..... | 25 |
| MSC-1310-10..... | 3698..... | 81 | NBS-895-C60..... | 3575..... | 20 | SZB-190..... | 1346..... | 25 |
| MSC-1310-15..... | 3699..... | 81 | NBS-895-C69..... | 3574..... | 20 | SZB-214..... | 2250..... | 25 |
| MSC-1316-12..... | 3752..... | 81 | O2E..... | 4968..... | 104 | TAE1118..... | 3263..... | 34 |
| MSC-1316-17..... | 3753..... | 81 | ODU-32..... | 4961..... | 102 | TAE1120..... | 3264..... | 34 |
| MSC-1320-12..... | 3754..... | 81 | ODU32-KIT..... | 4957..... | 100 | TAE1125..... | 3249..... | 34 |
| MSC-1320-17..... | 3755..... | 81 | OMR-601..... | 4282..... | 55 | TDI-900..... | 4021..... | 47 |
| MSC-1706-10..... | 3756..... | 81 | ONE+..... | 2865..... | 15 | TGT-100..... | 4026..... | 41 |
| MSC-1706-15..... | 3757..... | 81 | ONE+ SAT..... | 2864..... | 14 | TOR-150..... | 1944..... | 6 |
| MSC-1710-10..... | 3758..... | 81 | ONEHOME-C48..... | 2858..... | 16 | TOR-250..... | 1942..... | 6 |
| MSC-1710-15..... | 3759..... | 81 | ONEHOME-C60..... | 2857..... | 16 | TPC-010..... | 3842..... | 40 |
| MSC-1716-12..... | 3760..... | 81 | ONEHOME-C69..... | 2856..... | 16 | UAH-001..... | 3870..... | 61 |
| MSC-1716-17..... | 3761..... | 81 | OPTICAL-LNB..... | 4956..... | 100 | UCF-170..... | 1847..... | 91 |
| MSC-1720-12..... | 3762..... | 81 | PMR-601..... | 4281..... | 55 | UCR-600..... | 3132..... | 91 |
| MSC-1720-17..... | 3763..... | 81 | PSA-012..... | 3784..... | 82 | UDA-500..... | 3787..... | 83 |
| MSS-0504..... | 3652..... | 78 | PSE-300..... | 5360..... | 88 | UDA-505..... | 3786..... | 83 |
| MSS-0508..... | 3653..... | 78 | PSU-150..... | 3865..... | 60 | UDF-205..... | 2075..... | 85 |
| MSS-0512..... | 3654..... | 78 | PSU-QUATRO..... | 4951..... | 100 | UDF-307..... | 2076..... | 85 |
| MSS-0516..... | 3655..... | 78 | PZB-453..... | 2247..... | 25 | UDF-408..... | 2077..... | 85 |
| MSS-0520..... | 3656..... | 78 | PZL-017..... | 2221..... | 25 | UDF-612..... | 2078..... | 85 |
| MSS-0524..... | 3657..... | 78 | QUAD-GTU..... | 4952..... | 100 | UDF-813..... | 2079..... | 85 |
| MSS-0528..... | 3658..... | 78 | QUATRO-GTU..... | 4953..... | 100 | UDM-110..... | 2052..... | 84 |
| MSS-0532..... | 3659..... | 78 | RDT-100..... | 1065..... | 107 | UDM-115..... | 2053..... | 84 |
| MSS-0904..... | 3660..... | 78 | RPA-060..... | 3065..... | 7 | UDM-120..... | 2054..... | 84 |
| MSS-0908..... | 3661..... | 78 | RPA-080..... | 3067..... | 7 | UDM-125..... | 2055..... | 84 |
| MSS-0912..... | 3662..... | 78 | RPA-100..... | 3069..... | 7 | UDM-210..... | 2056..... | 84 |
| MSS-0916..... | 3663..... | 78 | RPA-120..... | 3060..... | 7 | UDM-215..... | 2057..... | 84 |
| MSS-0920..... | 3664..... | 78 | SAE-912..... | 3500..... | 35 | UDM-220..... | 2058..... | 84 |
| MSS-0926..... | 3665..... | 78 | SAE-916..... | 3503..... | 35 | UDM-225..... | 2059..... | 84 |
| MSS-0932..... | 3666..... | 78 | SAE-920..... | 3507..... | 35 | UDM-410..... | 2060..... | 84 |
| MSS-1304..... | 3667..... | 79 | SAI-311..... | 1640..... | 91 | UDM-415..... | 2061..... | 84 |
| MSS-1308..... | 3668..... | 79 | SBA-100-C48..... | 1228..... | 10 | UDM-420..... | 2062..... | 84 |
| MSS-1312..... | 3669..... | 79 | SBA-100-C60..... | 1227..... | 10 | UDM-425..... | 2063..... | 84 |
| MSS-1316..... | 3670..... | 79 | SBA-100-C69..... | 1225..... | 10 | UDM-615..... | 2064..... | 84 |
| MSS-1320..... | 3671..... | 79 | SBA-101-C48..... | 1296..... | 10 | UDM-620..... | 2065..... | 84 |
| MSS-1326..... | 3672..... | 79 | SBA-101-C60..... | 1295..... | 10 | UDM-625..... | 2066..... | 84 |
| MSS-1332..... | 3673..... | 79 | SBA-101-C69..... | 1294..... | 10 | UDM-815..... | 2067..... | 84 |
| MSS-1708..... | 3674..... | 79 | SBA-102-C48..... | 1302..... | 10 | UDM-820..... | 2068..... | 84 |
| MSS-1712..... | 3675..... | 79 | SBA-102-C60..... | 1301..... | 10 | UDM-825..... | 2069..... | 84 |
| MSS-1716..... | 3676..... | 79 | SBA-102-C69..... | 1300..... | 10 | UEU-121K..... | 1113..... | 7 |
| MSS-1720..... | 3677..... | 79 | SBA-190-C48..... | 1308..... | 10 | UEU-124K..... | 1114..... | 7 |
| MSS-1726..... | 3678..... | 79 | SBA-190-C60..... | 1307..... | 10 | UEU-221K..... | 3083..... | 7 |
| MSS-1732..... | 3679..... | 79 | SBA-190-C69..... | 1306..... | 10 | UEU-421K..... | 1112..... | 7 |
| MTI-800..... | 4099..... | 38 | SCF-085..... | 1067..... | 6 | USB-300..... | 4284..... | 62 |
| MTI-900..... | 4098..... | 38 | SMR-601..... | 4280..... | 55 | V-2T..... | 1408..... | 91 |
| NBS-204..... | 3516..... | 21 | SPA-240..... | 3071..... | 6 | WHOLEBAND-LNB..... | 4955..... | 102 |

REFERENCE INDEX

| REF. | MODEL | PAGE |
|------|-------------------|------|
| 1050 | FLOW STB | 66 |
| 1051 | FLOW IRD EXTENDER | 66 |
| 1065 | RDT-100 | 107 |
| 1067 | SCF-085 | 6 |
| 1107 | FIS-950 | 91 |
| 1112 | UEU-421K | 7 |
| 1113 | UEU-121K | 7 |
| 1114 | UEU-124K | 7 |
| 1222 | JSBA-100-C60 | 11 |
| 1223 | JSBA-100-C69 | 11 |
| 1224 | JSBA-100-C48 | 11 |
| 1225 | SBA-100-C69 | 10 |
| 1227 | SBA-100-C60 | 10 |
| 1228 | SBA-100-C48 | 10 |
| 1294 | SBA-101-C69 | 10 |
| 1295 | SBA-101-C60 | 10 |
| 1296 | SBA-101-C48 | 10 |
| 1300 | SBA-102-C69 | 10 |
| 1301 | SBA-102-C60 | 10 |
| 1302 | SBA-102-C48 | 10 |
| 1306 | SBA-190-C69 | 10 |
| 1307 | SBA-190-C60 | 10 |
| 1308 | SBA-190-C48 | 10 |
| 1346 | SZB-190 | 25 |
| 1408 | V-2T | 91 |
| 1435 | FLTE601 | 86 |
| 1436 | FLTE-481 | 87 |
| 1437 | FLTE-482 | 87 |
| 1460 | ABT-210 | 88 |
| 1502 | CAD | 91 |
| 1503 | CHD-950 | 91 |
| 1640 | SAI-311 | 91 |
| 1674 | AV-020 | 91 |
| 1725 | IKS-1E/FM | 6 |
| 1728 | DAB-031 | 6 |
| 1800 | HDT511V | 5 |
| 1803 | HDT513V | 5 |
| 1811 | HDTN-790V | 5 |
| 1813 | HDTN-790V | 5 |
| 1816 | HDTF-C48G | 4 |
| 1817 | HDTF-C69V | 4 |
| 1818 | HDTF-C48V | 4 |
| 1819 | HDTF-C58V | 4 |
| 1820 | HDTF-C60G | 4 |
| 1821 | HDTF-C60V | 4 |
| 1824 | HDTN-694 | 5 |
| 1825 | HDTN-694V | 5 |
| 1847 | UCF-170 | 91 |
| 1876 | BFT-100 | 6 |
| 1880 | MAS-250 | 6 |
| 1886 | GME-200 | 6 |
| 1887 | BMA-200 | 6 |
| 1888 | KMV-100 | 6 |
| 1911 | GMA-400 | 6 |
| 1913 | BBT-100 | 6 |
| 1941 | MAS-300 | 6 |
| 1942 | TOR-250 | 6 |
| 1944 | TOR-150 | 6 |

| REF. | MODEL | PAGE |
|------|-----------|------|
| 1949 | BAP-200 | 6 |
| 1950 | BTA-225 | 6 |
| 2016 | CCI-174 | 90 |
| 2052 | UDM-110 | 84 |
| 2053 | UDM-115 | 84 |
| 2054 | UDM-120 | 84 |
| 2055 | UDM-125 | 84 |
| 2056 | UDM-210 | 84 |
| 2057 | UDM-215 | 84 |
| 2058 | UDM-220 | 84 |
| 2059 | UDM-225 | 84 |
| 2060 | UDM-410 | 84 |
| 2061 | UDM-415 | 84 |
| 2062 | UDM-420 | 84 |
| 2063 | UDM-425 | 84 |
| 2064 | UDM-615 | 84 |
| 2065 | UDM-620 | 84 |
| 2066 | UDM-625 | 84 |
| 2067 | UDM-815 | 84 |
| 2068 | UDM-820 | 84 |
| 2069 | UDM-825 | 84 |
| 2075 | UDF-205 | 85 |
| 2076 | UDF-307 | 85 |
| 2077 | UDF-408 | 85 |
| 2078 | UDF-612 | 85 |
| 2079 | UDF-813 | 85 |
| 2169 | ARE-220 | 107 |
| 2171 | ARE-320 | 107 |
| 2172 | ARE-420 | 107 |
| 2174 | ARE-120 | 107 |
| 2220 | BAS-915 | 25 |
| 2221 | CTF-075 | 91 |
| 2221 | PZL-017 | 25 |
| 2222 | BAS-913 | 25 |
| 2224 | COF-809 | 25 |
| 2225 | BAS-919 | 25 |
| 2246 | SZB-148 | 25 |
| 2247 | PZB-453 | 25 |
| 2250 | SZB-214 | 25 |
| 2260 | SZB+550 | 24 |
| 2293 | SZB-128 | 25 |
| 2294 | SZB-129 | 25 |
| 2368 | CTF-190 | 91 |
| 2377 | CFR-680 | 91 |
| 2379 | BCF-060 | 91 |
| 2472 | ARTU009 | 88 |
| 2473 | ARTU059 | 88 |
| 2474 | ARTU900 | 88 |
| 2475 | ARTU901 | 88 |
| 2476 | ARTU902 | 88 |
| 2477 | ARTU903 | 88 |
| 2493 | 17WTCAPH1 | 90 |
| 2505 | CCT-171 | 90 |
| 2506 | CCH-175 | 90 |
| 2513 | CTF-125 | 91 |
| 2514 | CCT-125 | 90 |
| 2521 | CCI-179 | 90 |
| 2522 | CCI-175 | 90 |

| REF. | MODEL | PAGE |
|------|-------------|------|
| 2735 | ARTU000 | 88 |
| 2736 | ARTU001 | 88 |
| 2740 | ARTU058 | 88 |
| 2856 | ONEHOME-C69 | 16 |
| 2857 | ONEHOME-C60 | 16 |
| 2858 | ONEHOME-C48 | 16 |
| 2864 | ONE+ SAT | 14 |
| 2865 | ONE+ | 15 |
| 3030 | MAW-300 | 72 |
| 3031 | MAW-201 | 74 |
| 3060 | RPA-120 | 7 |
| 3065 | RPA-060 | 7 |
| 3067 | RPA-080 | 7 |
| 3069 | RPA-100 | 7 |
| 3071 | SPA-240 | 6 |
| 3083 | UEU-221K | 7 |
| 3105 | FAV-020 | 91 |
| 3131 | CFC-600 | 91 |
| 3132 | UCR-600 | 91 |
| 3133 | CCF-111 | 91 |
| 3152 | SZB-139 | 25 |
| 3160 | SZB-168 | 25 |
| 3211 | FMM-100 | 83 |
| 3241 | IFC-215 | 91 |
| 3242 | FAV-920 | 91 |
| 3249 | TAE1125 | 34 |
| 3263 | TAE1118 | 34 |
| 3264 | TAE1120 | 34 |
| 3372 | DMS-300 | 85 |
| 3434 | ATP200-C60 | 29 |
| 3436 | APB-112-M | 11 |
| 3437 | APB-224-M | 11 |
| 3461 | AFI-190 | 30 |
| 3500 | SAE-912 | 35 |
| 3503 | SAE-916 | 35 |
| 3507 | SAE-920 | 35 |
| 3516 | NBS-204 | 21 |
| 3562 | NBS-804-C69 | 20 |
| 3563 | NBS-804-C60 | 20 |
| 3564 | NBS-804-C48 | 20 |
| 3565 | NBS-604-C69 | 21 |
| 3566 | NBS-604-C60 | 21 |
| 3567 | NBS-604-C48 | 21 |
| 3568 | NBS-695-C69 | 21 |
| 3569 | NBS-695-C60 | 21 |
| 3570 | NBS-695-C48 | 21 |
| 3571 | NBS-801-C69 | 20 |
| 3572 | NBS-801-C60 | 20 |
| 3573 | NBS-801-C48 | 20 |
| 3574 | NBS-895-C69 | 20 |
| 3575 | NBS-895-C60 | 20 |
| 3576 | NBS-895-C48 | 20 |
| 3583 | ATP-200-C69 | 29 |
| 3584 | ATP-200-C48 | 29 |
| 3588 | ATP-190-C69 | 28 |
| 3589 | ATP-190-C60 | 28 |
| 3590 | ATP-190-C48 | 28 |
| 3591 | ATP-290-C69 | 28 |

REFERENCE INDEX

| REF. | MODEL | PAGE | REF. | MODEL | PAGE | REF. | MODEL | PAGE |
|------|-------------|------|------|--------------------|------|------|---------------------|------|
| 3592 | ATP-290-C60 | 28 | 3754 | MSC-1320-12 | 81 | 4402 | COF-700 | 55 |
| 3593 | ATP-290-C48 | 28 | 3755 | MSC-1320-17 | 81 | 4403 | BAS-700 | 55 |
| 3594 | ATP-400-C69 | 29 | 3756 | MSC-1706-10 | 81 | 4404 | COR-150 | 60 |
| 3595 | ATP-400-C60 | 29 | 3757 | MSC-1706-15 | 81 | 4411 | BAS-900 | 55 |
| 3596 | ATP-400-C48 | 29 | 3758 | MSC-1710-10 | 81 | 4427 | HPA-125 | 54 |
| 3597 | ATP-490-C69 | 28 | 3759 | MSC-1710-15 | 81 | 4430 | BUS-013 | 55 |
| 3598 | ATP-490-C60 | 28 | 3760 | MSC-1716-12 | 81 | 4433 | AMX-400 | 53 |
| 3599 | ATP-490-C48 | 28 | 3761 | MSC-1716-17 | 81 | 4437 | HPA-920 | 54 |
| 3652 | MSS-0504 | 78 | 3762 | MSC-1720-12 | 81 | 4485 | MAC-401 | 73 |
| 3653 | MSS-0508 | 78 | 3763 | MSC-1720-17 | 81 | 4488 | MAC-HOME | 71 |
| 3654 | MSS-0512 | 78 | 3780 | MSA-005 | 82 | 4492 | CFP-900 | 53 |
| 3655 | MSS-0516 | 78 | 3781 | MSA-009 | 82 | 4493 | MAC-HD | 70 |
| 3656 | MSS-0520 | 78 | 3782 | MSA-013 | 82 | 4888 | FSP-102 | 102 |
| 3657 | MSS-0524 | 78 | 3783 | MSA-017 | 82 | 4889 | FSP-103 | 102 |
| 3658 | MSS-0528 | 78 | 3784 | PSA-012 | 82 | 4890 | FSP-104 | 102 |
| 3659 | MSS-0532 | 78 | 3786 | UDA-505 | 83 | 4891 | FSP-108 | 102 |
| 3660 | MSS-0904 | 78 | 3787 | UDA-500 | 83 | 4892 | FAO-004 | 98 |
| 3661 | MSS-0908 | 78 | 3842 | TPC-010 | 40 | 4893 | FAO-006 | 98 |
| 3662 | MSS-0912 | 78 | 3844 | SPC-030 | 45 | 4895 | FRD-100 | 98 |
| 3663 | MSS-0916 | 78 | 3849 | MCP-801 | 44 | 4896 | FSP-202 | 98 |
| 3664 | MSS-0920 | 78 | 3851 | MCP-811 | 44 | 4897 | FSP-208 | 98 |
| 3665 | MSS-0926 | 78 | 3854 | MHD-201 | 39 | 4898 | FSP-204 | 98 |
| 3666 | MSS-0932 | 78 | 3855 | MHD-202 | 39 | 4899 | FSP-216 | 98 |
| 3667 | MSS-1304 | 79 | 3859 | HTL-TT2 | 52 | 4904 | FSP-302 | 94 |
| 3668 | MSS-1308 | 79 | 3860 | HTL-STC | 51 | 4905 | FSP-303 | 94 |
| 3669 | MSS-1312 | 79 | 3861 | HTL-TRX | 50 | 4914 | FRD-400 | 96 |
| 3670 | MSS-1316 | 79 | 3863 | HTI-424 | 59 | 4915 | FTD-420 | 94 |
| 3671 | MSS-1320 | 79 | 3864 | HTI-404 | 58 | 4916 | FSP-304 | 94 |
| 3672 | MSS-1326 | 79 | 3865 | PSU-150 | 60 | 4918 | FSP-306 | 94 |
| 3673 | MSS-1332 | 79 | 3866 | BACK-500 | 61 | 4933 | FLO-005 | 106 |
| 3674 | MSS-1708 | 79 | 3867 | SR-HTI | 63 | 4934 | FLO-010 | 106 |
| 3675 | MSS-1712 | 79 | 3868 | HTA-125 | 60 | 4935 | FLO-020 | 106 |
| 3676 | MSS-1716 | 79 | 3870 | UAH-001 | 61 | 4936 | FLO-030 | 106 |
| 3677 | MSS-1720 | 79 | 4020 | MDI-910 | 46 | 4937 | FLO-040 | 106 |
| 3678 | MSS-1726 | 79 | 4021 | TDI-900 | 47 | 4938 | FLO-050 | 106 |
| 3679 | MSS-1732 | 79 | 4026 | TGT-100 | 41 | 4939 | FLO-075 | 106 |
| 3680 | MSC-0504-05 | 80 | 4070 | SPI-300 | 55 | 4940 | FLO-100 | 106 |
| 3681 | MSC-0504-10 | 80 | 4084 | SRF-011 | 43 | 4946 | FAO-105 | 102 |
| 3682 | MSC-0508-05 | 80 | 4096 | SRC-111 | 42 | 4947 | FAO-110 | 102 |
| 3683 | MSC-0508-10 | 80 | 4098 | MTI-900 | 38 | 4948 | FAO-115 | 102 |
| 3684 | MSC-0512-05 | 80 | 4099 | MTI-800 | 38 | 4951 | PSU-QUATRO | 100 |
| 3685 | MSC-0512-10 | 80 | 4280 | SMR-601 | 55 | 4952 | QUAD-GTU | 100 |
| 3686 | MSC-0516-05 | 80 | 4281 | PMR-601 | 55 | 4953 | QUATRO-GTU | 100 |
| 3687 | MSC-0516-10 | 80 | 4282 | OMR-601 | 55 | 4955 | WHOLEBAND-LNB | 102 |
| 3688 | MSC-0906-10 | 80 | 4284 | USB-300 | 62 | 4956 | OPTICAL-LNB | 100 |
| 3689 | MSC-0906-15 | 80 | 4285 | ADA-HTI | 63 | 4957 | ODU32-KIT | 100 |
| 3690 | MSC-0910-10 | 80 | 4308 | FLOW PSU | 66 | 4960 | CCO-502 | 106 |
| 3691 | MSC-0910-15 | 80 | 4311 | FLOW SEC | 66 | 4961 | ODU-32 | 102 |
| 3692 | MSC-0916-12 | 80 | 4312 | FLOW BASE | 66 | 4962 | FSA-401 | 102 |
| 3693 | MSC-0916-17 | 80 | 4313 | FLOW OUT | 66 | 4964 | SWITCH BLADE PLUS 8 | 106 |
| 3694 | MSC-0920-12 | 80 | 4314 | FLOW HUB | 66 | 4965 | SWITCH BLADE BASE 8 | 106 |
| 3695 | MSC-0920-17 | 80 | 4315 | FLOW ENC | 66 | 4966 | BARREL CONNECTOR | 106 |
| 3696 | MSC-1306-10 | 81 | 4316 | FLOW COVER | 66 | 4967 | DSCR-GTU | 104 |
| 3697 | MSC-1306-15 | 81 | 4317 | FLOW DEVICE MGR | 67 | 4968 | O2E | 104 |
| 3698 | MSC-1310-10 | 81 | 4318 | FLOW IN2 | 66 | 5360 | PSE-300 | 88 |
| 3699 | MSC-1310-15 | 81 | 4319 | FLOW IN4 | 66 | 8225 | BAS-002 | 107 |
| 3752 | MSC-1316-12 | 81 | 4320 | FLOW PSU REDUNDANT | 66 | 8226 | BAS-004 | 107 |
| 3753 | MSC-1316-17 | 81 | 4329 | FLOW STB AC3+ | 66 | 8227 | BAS-006 | 107 |



About Ikusi

Ikusi is an integration, engineering and technology development company for digital business transformation.

Ikusi has an integrated team of 700 highly qualified professionals and clients in more than 80 countries, dedicating 4% of its turnover to R+D+i tasks. Ikusi is present in Australia, Chile, Colombia, Spain, UAE, France and Mexico.

Ikusi is part of Velatia, an international family, industrial and technological group that operates in the field of electrical networks, electronics and communications networks, as well as in the consulting, security and aeronautical sectors where safety, efficiency and reliability are valued. Velatia is made up of 3,200 professionals, has its own offices in 19 countries and 16 manufacturing centers and a world-class research and technology center.



SEDE CENTRAL IKUSI
Paseo Miramón, 170
20014 Donostia/San Sebastián
Gipuzkoa, España
Tel.: +34 943 44 88 95
television@ikusi.com
www.ikusi.tv

ESPAÑA
Pol. Ind. San Marcos
c/ Morse esq. Franklin
28906 Getafe, Madrid
Tel.: 915 15 51 10
television@ikusi.com
www.ikusi.tv

FRANCE
62 avenue du 8 mai 1945
64101 Bayonne Cedex
Tel.: +33 1 42 84 87 12
france.tv@ikusi.com
www.ikusi.tv/fr

MIDDLE EAST
6WA-504, Dubai
Airport Free Zone
PO Box: 54585 Dubai - U.A.E.
Telf: +971 4 2994770
Fax: +971 4 2994775
dubai.tv@ikusi.com
www.ikusi.tv/en

AUSTRALIA - NEW ZEALAND
7 Amsted Road
3153 Bayswater (Victoria)
Telf: +61 3 97208000
Fax: +61 3 97207422
australia.tv@ikusi.com
www.ikusi.tv/en